

# Air Slide Table

## Series MXQ

ø6, ø8, ø12, ø16, ø20, ø25

### How to Order

**MXQ 12** **50** **AS** **FR** **M9BW**

**Port thread type**

Nil	M thread	ø6 to ø16
	Rc	
TN	NPT	ø20, ø25
TF	G	

**Symmetric type**

Nil	Standard type
L	Symmetric type

**Bore size/Stroke (mm)**

ø6	10, 20, 30, 40, 50
ø8	10, 20, 30, 40, 50, 75
ø12	10, 20, 30, 40, 50, 75, 100
ø16	10, 20, 30, 40, 50, 75, 100, 125
ø20	10, 20, 30, 40, 50, 75, 100, 125, 150
ø25	10, 20, 30, 40, 50, 75, 100, 125, 150

**Functional option**

Nil	Standard type
F	With buffer
R <sup>(2)</sup>	With end lock
P	Axial piping type
FR <sup>(2)</sup>	With buffer and end lock
FP	With buffer, Axial piping type

Note 2) W/ end lock is not available in Series MXQ6.

**Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

**Auto switch**

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

\* For the applicable auto switch model, refer to the table below.  
\* For the applicable auto switch to buffer, refer to page 95. It requires to order separately.

**Adjuster option**

Nil	Without adjuster
AS	Extension end adjuster
AT	Retraction end adjuster
A	Double end adjuster
BS <sup>(1)</sup>	Extension end absorber
BT <sup>(1)</sup>	Retraction end absorber
B <sup>(1)</sup>	Double absorber
CS	Extension end metal stopper
CT	Retraction end metal stopper
C	Double metal stopper
ASBT <sup>(1)</sup>	Extension end adjuster + Retraction end absorber
ASCT	Extension end adjuster + Retraction end metal stopper
BSAT <sup>(1)</sup>	Extension end absorber + Retraction end adjuster
BSCT <sup>(1)</sup>	Extension end absorber + Retraction end metal stopper
CSAT	Extension end metal stopper + Retraction end adjuster
CSBT <sup>(1)</sup>	Extension end metal stopper + Retraction end absorber

Note 1) W/ shock absorber is not available in Series MXQ6.

**Option Combinations**

Adjuster option	Functional option	Nil	F	R	P	FR	FP
Nil		○	○	○	○	○	○
AS		○	○ <sup>(3)</sup>	○	○	○ <sup>(3)</sup>	○ <sup>(3)</sup>
AT		○	○	x	x	x	x
A		○	○ <sup>(3)</sup>	x	x	x	x
BS		○	x	○	○	x	x
BT		○	○	x	x	x	x
B		○	x	x	x	x	x
CS		○	○ <sup>(3)</sup>	○	○	○ <sup>(3)</sup>	○ <sup>(3)</sup>
CT		○	○	x	x	x	x
C		○	○ <sup>(3)</sup>	x	x	x	x
ASBT		○	○ <sup>(3)</sup>	x	x	x	x
ASCT		○	○ <sup>(3)</sup>	x	x	x	x
BSAT		○	x	x	x	x	x
BSCT		○	x	x	x	x	x
CSAT		○	○ <sup>(3)</sup>	x	x	x	x
CSBT		○	○ <sup>(3)</sup>	x	x	x	x

○ : Available, x : Not available

Note 3) With the combination of buffer mechanism and extension end stroke adjuster, the buffer stroke decreases by the amount of stroke adjusted with the extension end stroke adjuster.

**Applicable Auto Switch**/Refer to pages 1719 to 1827 for the detailed specifications of auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)		
Solid state switch	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	M9NV	M9N	●	●	●	○	○	IC circuit Relay, PLC
				3-wire (PNP)			M9PV	M9P	●	●	●	○	○	
				2-wire			M9BV	M9B	●	●	●	○	○	
				3-wire (NPN)			M9NWV	M9NW	●	●	●	○	○	
				3-wire (PNP)			M9PWV	M9PW	●	●	●	○	○	
				2-wire			M9BWV	M9BW	●	●	●	○	○	
Reed switch		Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V	A96V	A96	●	—	●	—	—	IC circuit
				2-wire			A93V	A93	●	—	●	—	—	Relay, PLC
			No	2-wire	24 V	12 V	A90V	A90	●	—	●	—	—	IC circuit

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWM  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWZ


\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are other applicable auto switches than listed, refer to page 128 for details.  
\* For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.  
\* Auto switches are shipped together (not assembled).

### Dimensions: MXQ6L/Symmetric Type

## Basic style

\* For detailed dimensions about the stroke adjuster, refer to the option for the stroke adjuster.  
Rubber stopper (Refer to page 122.)  
Metal stopper (Refer to page 125.)

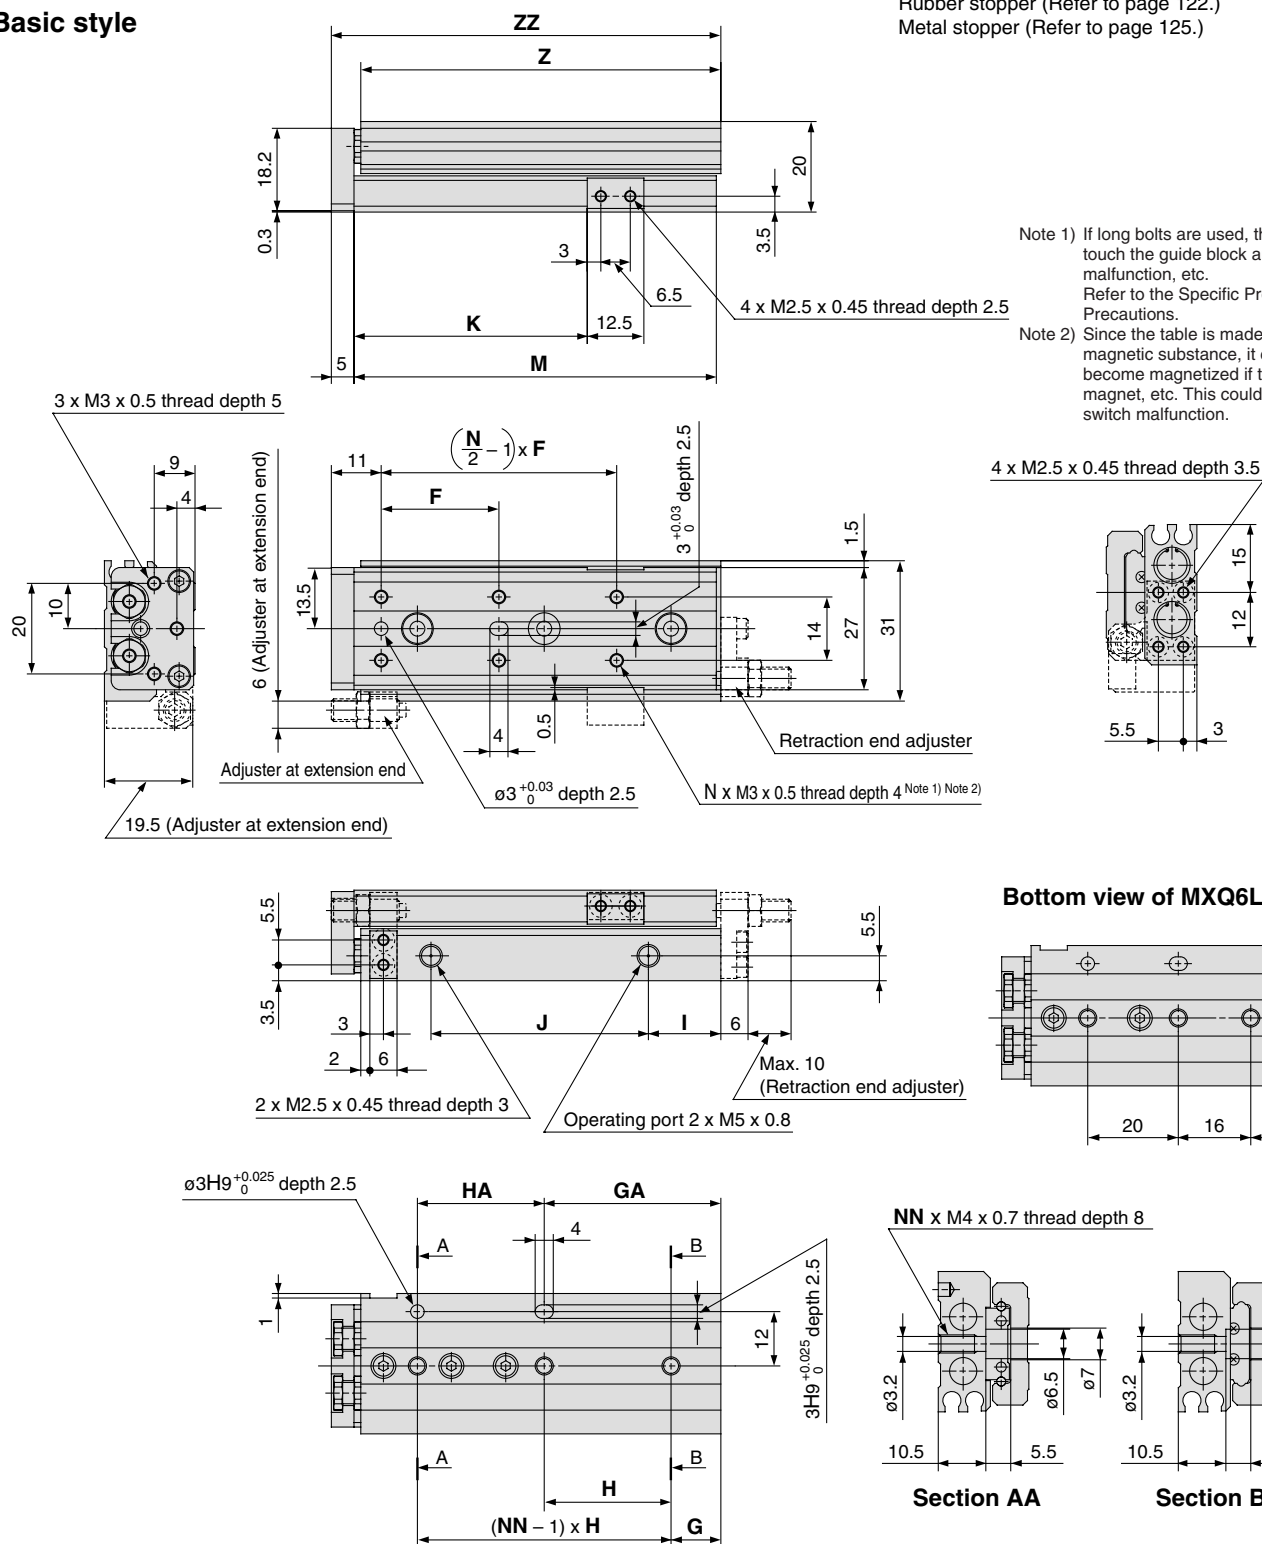

Model	F	N	G	H	NN	GA	HA	I	J	K	M	Z	ZZ
<b>MXQ6L-10</b>	22	4	6	23	2	13	16	9	17	21.5	42	41.5	48
<b>MXQ6L-20</b>	25	4	13	26	2	13	26	9	27	31.5	52	51.5	58
<b>MXQ6L-30</b>	21	6	<small>(Note)</small>	<small>(Note)</small>	3	29	20	9	37	41.5	62	61.5	68
<b>MXQ6L-40</b>	26	6	11	28	3	39	28	16	48	51.5	80	79.5	86
<b>MXQ6L-50</b>	27	6	21	28	3	49	28	9	65	61.5	90	89.5	96

Note) Refer to the bottom view of MXQ6L-30.