


PDF technical sheet


10R71916CVUJ84




High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	80 mm
D	110 mm
B	16 mm
d1	89.40 mm
D1	100.75 mm
D2	105.08 mm
a	21 mm
Contact angle, α	15 °
rs min	0.60 mm
r1s min	0.30 mm
f0	16.474
Precision class	P4
Mass	0.37 kg
Brand	SNR

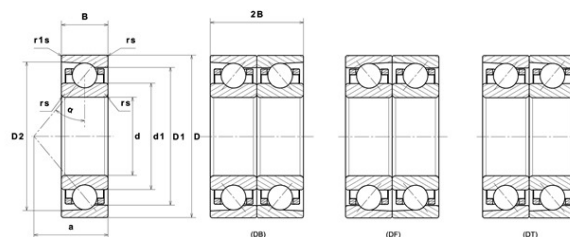

Product performance	
Dynamic load, C	34.40 kN
Static load, C0	36.10 kN
Fatigue limit load, Cu	1.94 kN
Nlim (oil)	18,500 Tr/min
Nlim (grease)	12,000 Tr/min
Axial displacement K Factor	0.98
Preload level	8
Peload value	540 kN
axial rigidity	136 N/ μ m
radial rigidity	681 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	9.88 Hz
Characteristic outer ring frequency, BPF0	11.29 Hz
Characteristic inner ring frequency, BPF1	13.71 Hz

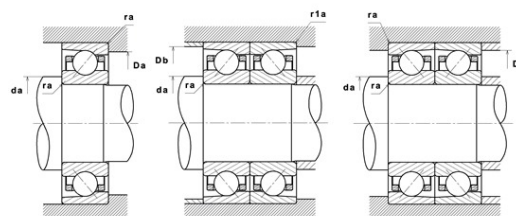

Abutment dimensions

da min	84.50 mm
db min	84.50 mm
Da max	105.50 mm
Db max	105.50 mm
r1a max	0.30 mm
ra max	0.60 mm
D6	92.40 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$