



High Speed 2 Port Valve



High speed response

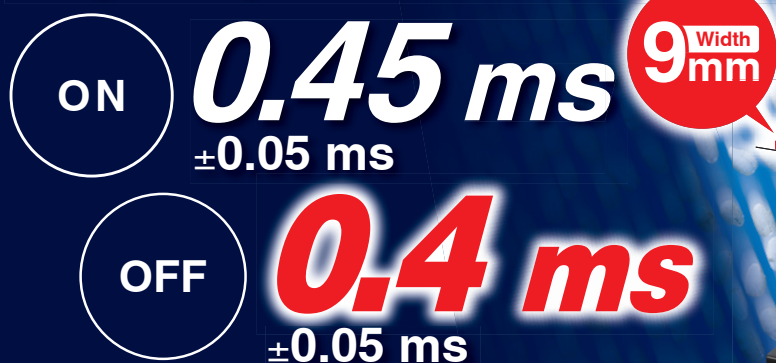

• 50 l/min 80 W type

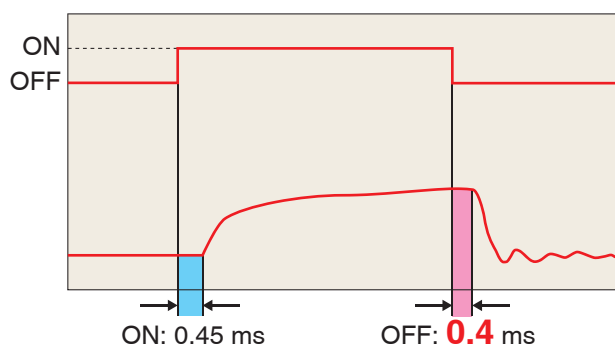

* The response time is measured based on SMC test conditions. (Not guaranteed values)



Long service life: 5 billion cycles or more


SMC's original valve and coil structure realizes a longer product life and requires less maintenance frequency.
(50 l/min type, 24 VDC, 0.25 MPa. Based on SMC life test conditions.)

High frequency: 1200 Hz

Good followability and response to successive electrical signal input. Continuous operation possible.

• 50 l/min 80 W type

Switching frequency: 1200 Hz

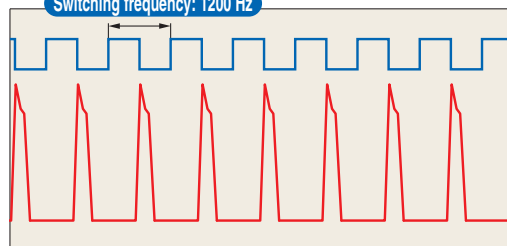

2 mounting types

Quick disconnect type



Screw mount type



The manifold base should be prepared by users.

Low power consumption: 4 w

Continuous energisation for extended periods is possible.

Series SX10



CAT.EUS70-53A-UK

○ Compact and Space-saving * The manifold base should be prepared by users.

Manifold minimum mounting pitch **9.5 mm**



Actual size

Width **9 mm**



Height

30.4 mm



Actual size

(Screw mount type)


○ Reduction in installation labour

(Quick disconnect type)

Can be mounted/
removed in one action
and no tools required.

Required time for
attachment/detachment:
Approx. 5 seconds
(per unit)

Reduces installation time for
multiple numbers of valves.




○ Coil temperature rise: 5 °C

(4 W type)

| Power consumption | Temperature rise |
|-------------------|------------------|
| 4 W type | 5 °C |
| 10 W type | 14 °C |

During continuous operation at 24 VDC, 0.25 MPa, 900 Hz


○ Filter attached type available



Filter is mounted to port 1 (IN).
Filter is mounted to port 1 (IN)
for quick disconnect type as well.

Variations/Purpose of Usage (Guide)

Flow Rate/Operating Frequency

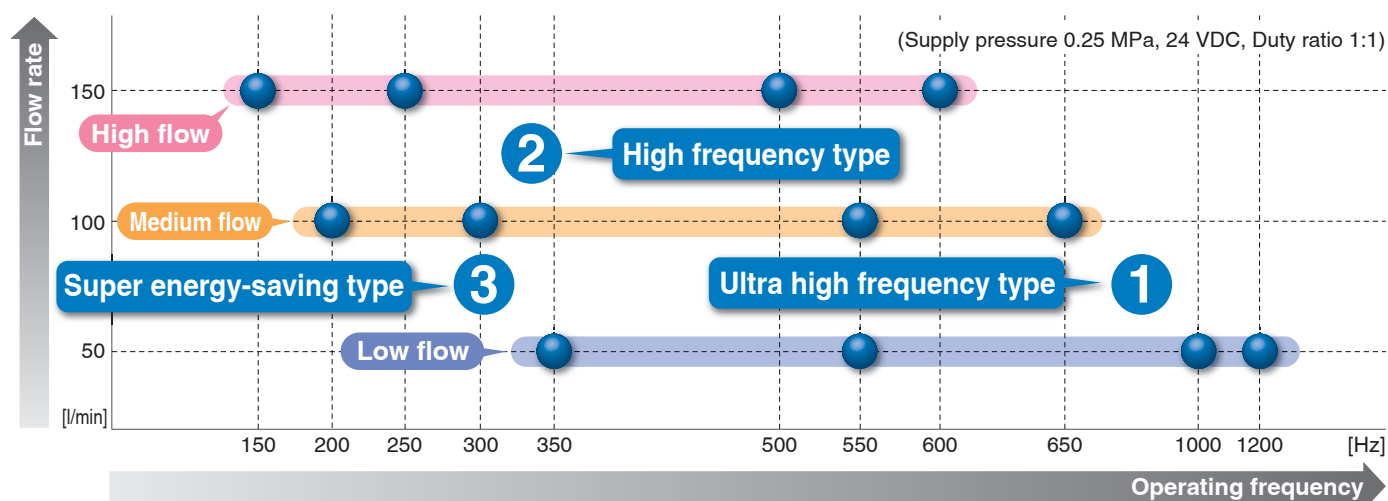


| Specifications | Driver | Continuous energisation | Power consumption | OFF response time | | |
|--|--|-------------------------|-------------------|-------------------|-----------|-----------|
| | | | | 50 l/min | 100 l/min | 150 l/min |
| ① Ultra high frequency type 500 to 1200 Hz | For power saving driver (Refer to page 4.) | — | 80 W, 40 W | 0.4 ms | 0.55 ms | 0.75 ms |
| ② High frequency type 250 to 550 Hz | Control driver is not necessary. | (Note) | 10 W | 0.4 ms | 0.55 ms | 0.75 ms |
| ③ Super energy-saving type 150 to 350 Hz | Control driver is not necessary. | Possible | 4 W | 0.4 ms | 0.55 ms | 0.75 ms |

(Note) Please consult with SMC for continuous energisation.

Variations

All models have the same body size.

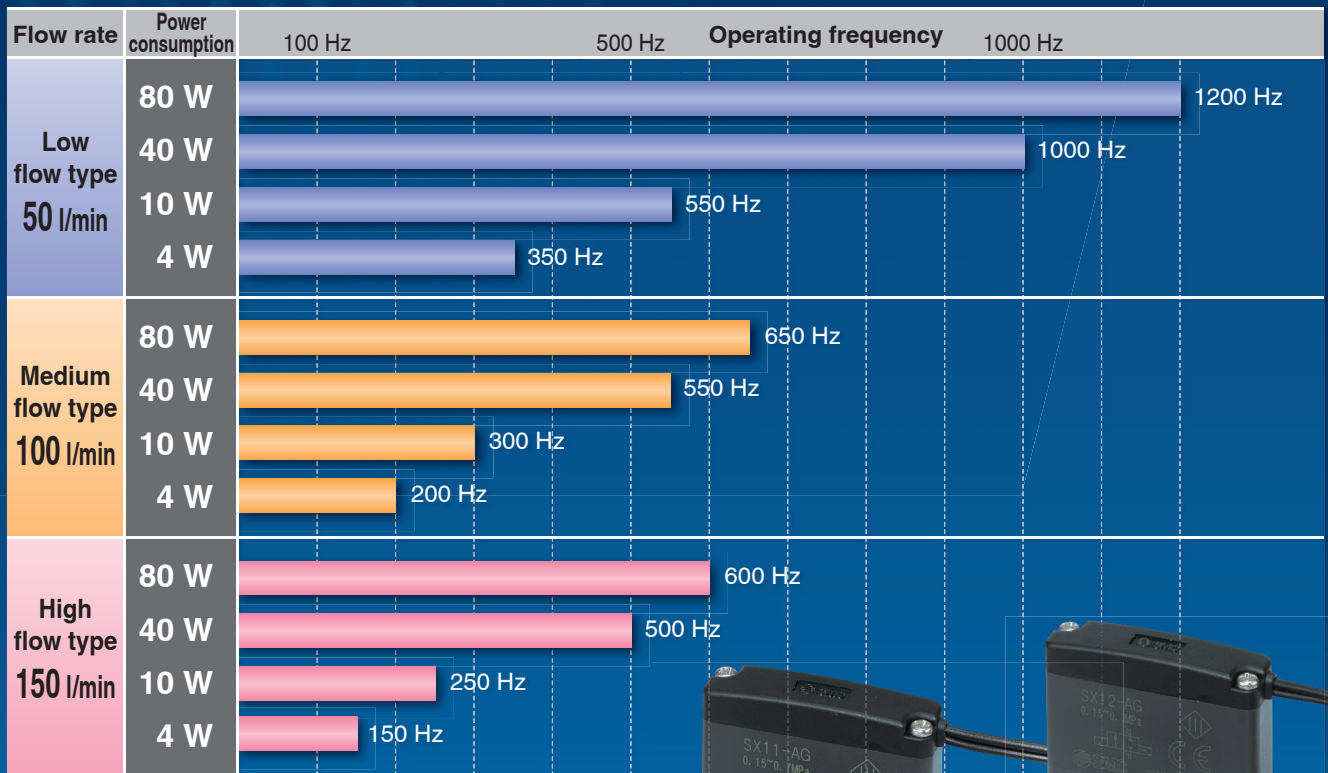

Select a model according to applications and purposes.

High speed response
required for both ON and OFF

Select the
80 W or 40 W
type.

| Model | Power consumption | Flow rate | Max. operating frequency | Response time [ms] | |
|---------------|-------------------|-----------|--------------------------|--------------------|------|
| | | | | ON | OFF |
| SX1□-A | 80 W | 50 l/min | 1200 Hz | 0.45 | 0.4 |
| -B | 40 W | 50 l/min | 1000 Hz | 0.55 | 0.4 |
| -E | 80 W | 100 l/min | 650 Hz | 0.55 | 0.55 |
| -F | 40 W | 100 l/min | 550 Hz | 0.7 | 0.55 |
| -J | 80 W | 150 l/min | 600 Hz | 0.6 | 0.75 |
| -K | 40 W | 150 l/min | 500 Hz | 0.8 | 0.75 |

* Current needs to be limited.

High speed response required
for OFF only without use of
special control circuit

Select the
10 W
type.

| Model | Power consumption | Flow rate | Max. operating frequency | Response time [ms] | |
|---------------|-------------------|-----------|--------------------------|--------------------|------|
| | | | | ON | OFF |
| SX1□-C | 10 W | 50 l/min | 550 Hz | 0.9 | 0.4 |
| -G | 10 W | 100 l/min | 300 Hz | 1.1 | 0.55 |
| -L | 10 W | 150 l/min | 250 Hz | 1.35 | 0.75 |

* Please consult with SMC for continuous energisation.

Saving energy and
continuous energisation
required

Select the
4 W
type.

| Model | Power consumption | Flow rate | Max. operating frequency | Response time [ms] | |
|---------------|-------------------|-----------|--------------------------|--------------------|------|
| | | | | ON | OFF |
| SX1□-D | 4 W | 50 l/min | 350 Hz | 1.25 | 0.4 |
| -H | 4 W | 100 l/min | 200 Hz | 1.7 | 0.55 |
| -M | 4 W | 150 l/min | 150 Hz | 2.75 | 0.75 |

* Continuous energisation is possible.

High Speed 2 Port Valve Series SX10



RoHS



How to Order

SX1 2 F - A G

Valve mounting

| | |
|---|---------------------------------------|
| 1 | Screw mount type <small>Note)</small> |
| 2 | Quick disconnect type |

Note) Two mounting screws (M3 x 0.5) and a gasket are included. (packaged together)

Filter (IN port)

| | |
|---|----------------------------------|
| — | Without filter |
| F | With filter <small>Note)</small> |

Note) Flow reduction rate
50 l/min: 5 % or less
100 l/min: 5 to 10 %
150 l/min: 10 to 15 %


Flow rate/Operating frequency (at 24 VDC, 0.25 MPa)

| Symbol | Flow rate [l/min] | Power consumption [W] | Max. operating frequency [Hz] |
|--------|-------------------|-----------------------|-------------------------------|
| A | 50 | 80 | 1200 |
| B | | 40 | 1000 |
| C | | 10 | 550 |
| D | | 4 | 350 |
| E | 100 | 80 | 650 |
| F | | 40 | 550 |
| G | | 10 | 300 |
| H | | 4 | 200 |
| J | 150 | 80 | 600 |
| K | | 40 | 500 |
| L | | 10 | 250 |
| M | | 4 | 150 |

Lead wire (grommet) length

| Symbol | Length |
|--------|---------|
| G | 300 mm |
| H | 500 mm |
| J | 1000 mm |

Symbol



Specifications

| Flow rate [l/min] [at 0.25 MPa] | 50 | | | | 100 | | | | 150 | | | |
|--|------------------------------------|------|-----|-----|-----|------|-----|-----|-----|------|-----|------|
| Power consumption [W] | 80 | 40 | 10 | 4 | 80 | 40 | 10 | 4 | 80 | 40 | 10 | 4 |
| Type of actuation | 2-position 2 port N.C., Air return | | | | | | | | | | | |
| Seal type | Metal poppet seal | | | | | | | | | | | |
| Valve width [mm] | 9 | | | | | | | | | | | |
| Fluid | Air | | | | | | | | | | | |
| Min. operating pressure [MPa] | 0.15 | | | | | | | | | | | |
| Coil resistance value [Ω] | 7.2 | 14.4 | 58 | 144 | 7.2 | 14.4 | 58 | 144 | 7.2 | 14.4 | 58 | 144 |
| Max. operating pressure [MPa] [at 24 VDC] | 0.7 | 0.7 | 0.7 | 0.6 | 0.7 | 0.7 | 0.6 | 0.4 | 0.7 | 0.7 | 0.4 | 0.25 |
| Ambient and fluid temperature [$^{\circ}\text{C}$] | -10 to 50 (No freezing) | | | | | | | | | | | |
| Lubrication | Not required | | | | | | | | | | | |
| Mounting orientation | Unrestricted | | | | | | | | | | | |
| Impact/Vibration resistance [m/s^2] | 300/50 | | | | | | | | | | | |
| Enclosure | Dustproof | | | | | | | | | | | |
| Electrical entry | Grommet | | | | | | | | | | | |
| Weight [g] | Screw mount type | | | | | | | | | | | |
| | 27 | | | | | | | | | | | |
| Weight [g] | Quick disconnect type | | | | | | | | | | | |
| | 29 | | | | | | | | | | | |

Characteristics

| Flow rate [L/min] [at 0.25 MPa] | 50 | | | | 100 | | | | 150 | | | |
|---|------------------------------|-------|-----|------|------|------|------|------|------|------|------|------|
| Power consumption [W] | 80 | 40 | 10 | 4 | 80 | 40 | 10 | 4 | 80 | 40 | 10 | 4 |
| Flow-rate characteristics | C [dm ³ /(s·bar)] | | | | | | | | | | | |
| | b | | | | | | | | | | | |
| | Cv | | | | | | | | | | | |
| Response time [ms] | ON | | | | | | | | | | | |
| | 0.45 | 0.55 | 0.9 | 1.25 | 0.55 | 0.7 | 1.1 | 1.7 | 0.6 | 0.8 | 1.35 | 2.75 |
| [at 0.25 MPa] | OFF | | | | | | | | | | | |
| | 0.4 | 0.4 | 0.4 | 0.4 | 0.55 | 0.55 | 0.55 | 0.55 | 0.75 | 0.75 | 0.75 | 0.75 |
| Max. operating frequency [Hz] [at 0.25 MPa] | 1,200 | 1,000 | 550 | 350 | 650 | 550 | 300 | 200 | 600 | 500 | 250 | 150 |

Note 1) 24 VDC, Duty ratio 1:1

80 W: Current needs to be limited by using an energy saving driver circuit.


40 W: Current needs to be limited by using an energy saving driver circuit.

10 W: Energising time is one second at a maximum. Please consult with SMC for continuous energisation.

4 W: Continuous energisation is possible.

Note 2) The response time and maximum operating frequency are not guaranteed. (Actual values based on SMC test conditions)


Pressure/Flow-rate Characteristics (without filter)

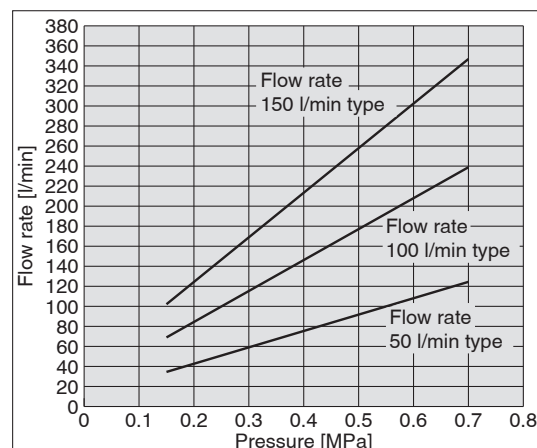





* The max. operating pressure varies depending on the power consumption. Please note the max. operating pressure and check the characteristics. Refer to the specifications above for the power consumption and the max. operating pressure.

Dimensions


SX12-□G Quick disconnect type

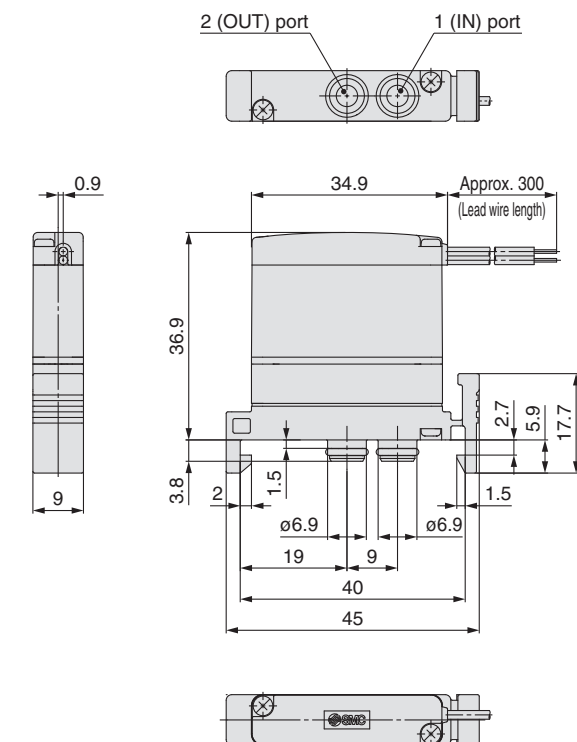

Manifold base recommended dimensions

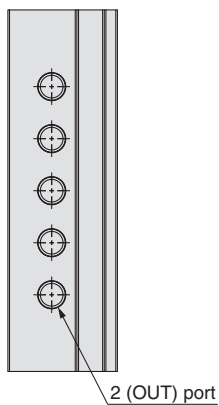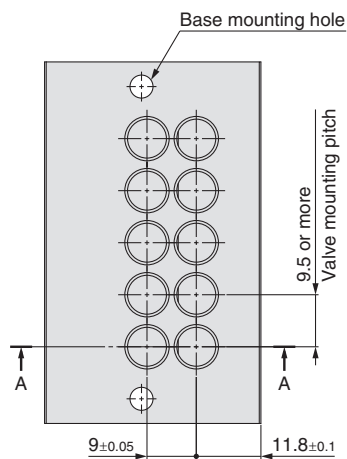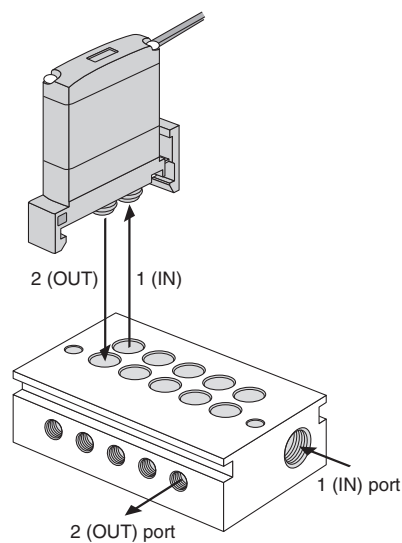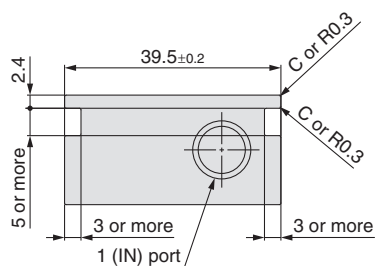


Sectional view A-A (2:1)

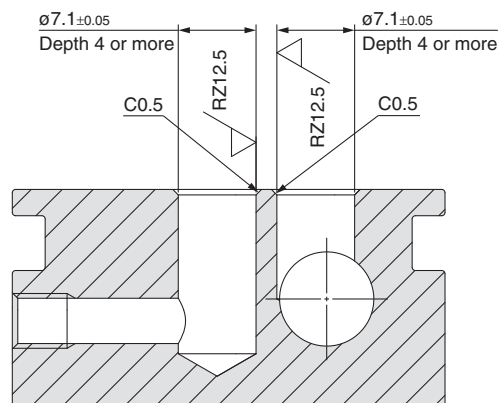


Dimensions

SX11-□G Screw mount type

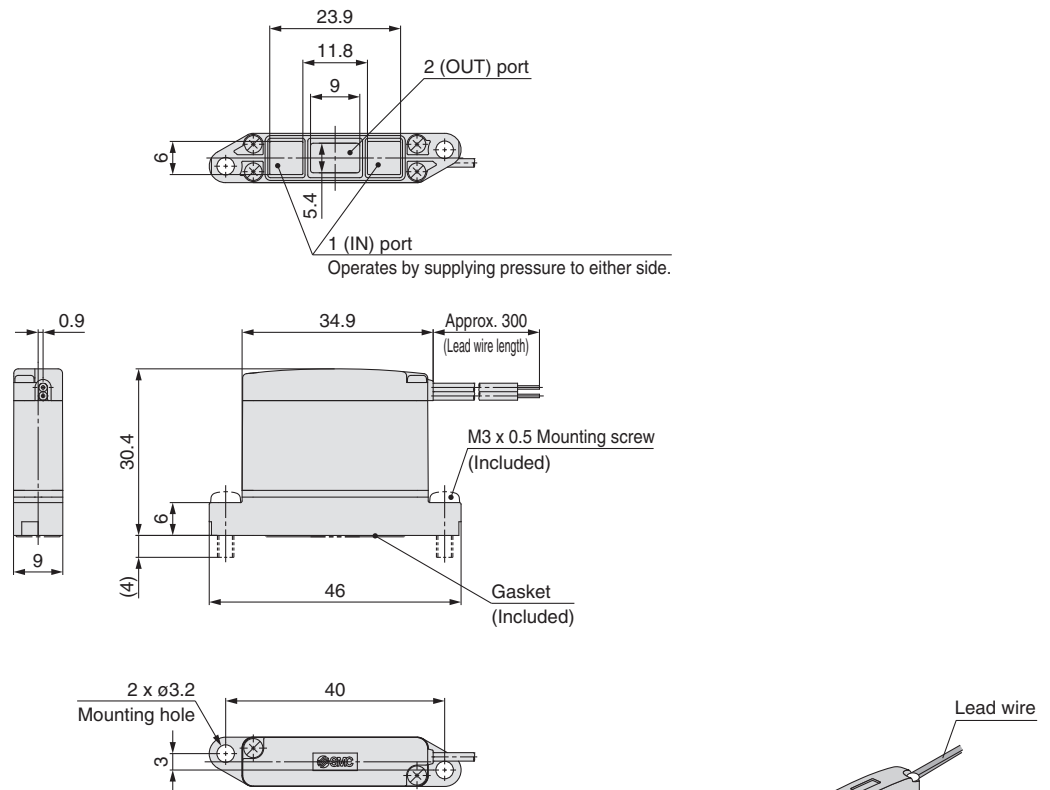


Manifold base recommended dimensions

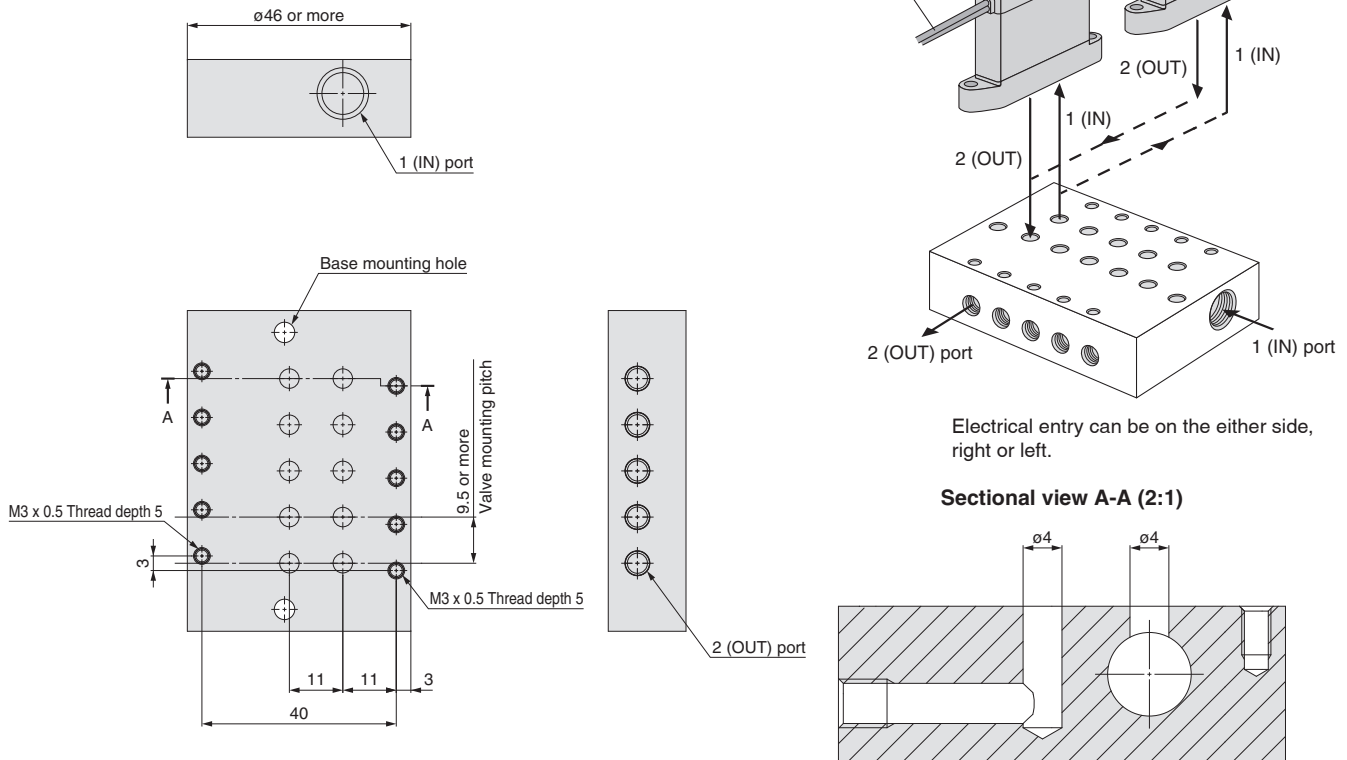


Control Method (Operation example with an energy saving driver circuit)

1. Control with 2 power supplies, starting power supply and holding power supply. Switching system from high voltage to low voltage

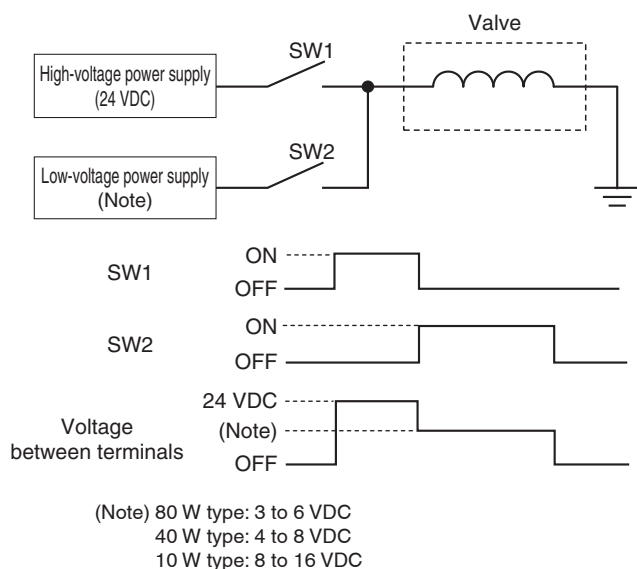

2. High speed switching control of high voltage by PWM control*. (*: PWM control circuit not currently available.)

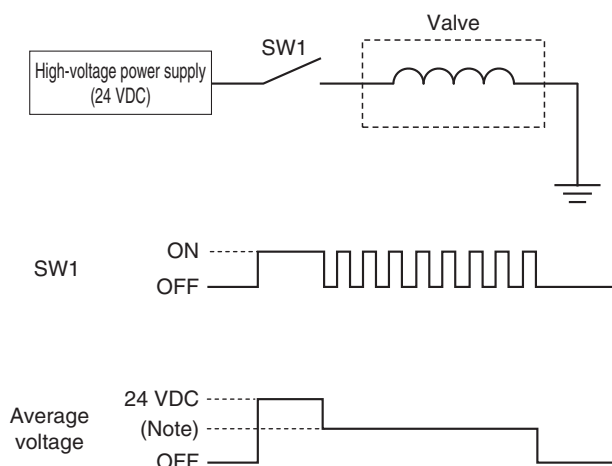

⚠ Specific Product Precautions

Be sure to read before handling. Refer to back cover for Safety Instructions. For 2 Port Solenoid Valves for Fluid Control Precautions, refer to “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smc.eu>

Continuous Energisation (at 24 VDC)

⚠ Caution

- Power consumption 80 W type: Not available**
When operating with an energy saving driver, continuous energisation with the holding voltage of 3 to 6 VDC is possible.
- Power consumption 40 W type: Not available**
When operating with an energy saving driver, continuous energisation with the holding voltage of 4 to 8 VDC is possible.
- Power consumption 10 W type: Please consult with SMC.**
When operating with an energy saving driver, continuous energisation with the holding voltage of 8 to 16 VDC is possible.
- Power consumption 4 W type: Available**

Energised Time/Non-energised Time (When not using power saving driver)

⚠ Caution

- Non-energised time (OFF) must be set longer than the energised time (ON).**
- For use with voltages other than 24 VDC, please consult with SMC with the operating condition information of pressure, voltage, energised time and non-energised time.**

Others

⚠ Caution

- If the valve is energised without air supply, the coil may be burned. Make sure to supply pressure to the valve when energising.**
- Please contact SMC for the product usage with a voltage at 75 VDC or more. Standard required by CE /UKCA mark is different.**

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC) ¹⁾, and other safety regulations.

Danger:

Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

Warning:

Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

Caution:

Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

- 1) ISO 4414: Pneumatic fluid power – General rules and safety requirements for systems and their components.
ISO 4413: Hydraulic fluid power – General rules and safety requirements for systems and their components.
IEC 60204-1: Safety of machinery – Electrical equipment of machines. (Part 1: General requirements)
ISO 10218-1: Robots and robotic devices - Safety requirements for industrial robots - Part 1: Robots.
etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Our products cannot be used beyond their specifications. Our products are not developed, designed, and manufactured to be used under the following conditions or environments.

Use under such conditions or environments is not covered.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Use for nuclear power, railways, aviation, space equipment, ships, vehicles, military application, equipment affecting human life, body, and property, fuel equipment, entertainment equipment, emergency shut-off circuits, press clutches, brake circuits, safety equipment, etc., and use for applications that do not conform to standard specifications such as catalogues and operation manuals.
3. Use for interlock circuits, except for use with double interlock such as installing a mechanical protection function in case of failure. Please periodically inspect the product to confirm that the product is operating properly.

Caution

We develop, design, and manufacture our products to be used for automatic control equipment, and provide them for peaceful use in manufacturing industries.

Use in non-manufacturing industries is not covered.

Products we manufacture and sell cannot be used for the purpose of transactions or certification specified in the Measurement Act.

The new Measurement Act prohibits use of any unit other than SI units in Japan.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first. ²⁾ Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.
- 2) Vacuum pads are excluded from this 1 year warranty.
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

SMC Corporation (Europe)

| | | | |
|----------------|-------------------|----------------------|-----------------------------|
| Austria | +43 (0)2262622800 | www.smc.at | office@smc.at |
| Belgium | +32 (0)33551464 | www.smc.be | info@smc.be |
| Bulgaria | +359 (0)2807670 | www.smc.bg | office@smc.bg |
| Croatia | +385 (0)13707288 | www.smc.hr | office@smc.hr |
| Czech Republic | +420 541424611 | www.smc.cz | office@smc.cz |
| Denmark | +45 70252900 | www.smc.dk.com | smc@smcdk.com |
| Estonia | +372 651 0370 | www.smcee.ee | info@smcee.ee |
| Finland | +358 207513513 | www.smc.fi | smc.fi@smc.fi |
| France | +33 (0)164761000 | www.smc-france.fr | supportclient@smc-france.fr |
| Germany | +49 (0)61034020 | www.smc.de | info@smc.de |
| Greece | +30 210 2717265 | www.smchellas.gr | sales@smchellas.gr |
| Hungary | +36 23513000 | www.smc.hu | office@smc.hu |
| Ireland | +353 (0)14039000 | www.smcautomation.ie | sales@smcautomation.ie |
| Italy | +39 03990691 | www.smcitalia.it | mailbox@smcitalia.it |
| Latvia | +371 67817700 | www.smc.lv | info@smc.lv |

| | | | |
|-------------|---------------------|----------------------|-----------------------------|
| Lithuania | +370 5 2308118 | www.smclt.lt | info@smclt.lt |
| Netherlands | +31 (0)205318888 | www.smc.nl | info@smc.nl |
| Norway | +47 67129020 | www.smc-norge.no | post@smc-norge.no |
| Poland | +48 222119600 | www.smc.pl | sales@smc.pl |
| Portugal | +351 214724500 | www.smc.eu | apoioclientept@smc.smces.es |
| Romania | +40 213205111 | www.smcromania.ro | smcromania@smcromania.ro |
| Russia | +7 (812)3036600 | www.smc.eu | sales@smcru.com |
| Slovakia | +421 (0)413213212 | www.smc.sk | office@smc.sk |
| Slovenia | +386 (0)73885412 | www.smc.si | office@smc.si |
| Spain | +34 945184100 | www.smc.eu | post@smc.smces.es |
| Sweden | +46 (0)86031240 | www.smc.nu | smc@smc.nu |
| Switzerland | +41 (0)523963131 | www.smc.ch | info@smc.ch |
| Turkey | +90 212 489 0 440 | www.smcturkey.com.tr | info@smcturkey.com.tr |
| UK | +44 (0)845 121 5122 | www.smc.uk | sales@smc.uk |

| | | | |
|--------------|-----------------|-----------------|---------------------|
| South Africa | +27 10 900 1233 | www.smcza.co.za | zasales@smcza.co.za |
|--------------|-----------------|-----------------|---------------------|