

# Air Slide Table (Symmetric Type)

## Series **MXS□L**

### How to Order

Air slide table

**MXS 12 □ L - 50 AS - M9BW □**

#### Port thread type

Nil	M thread	ø6 to ø16
	Rc	
TN	NPT	ø20, ø25
TF	G	

#### Symmetric type

#### Bore size (Stroke (mm))

6	10, 20, 30, 40, 50
8	10, 20, 30, 40, 50, 75
12	10, 20, 30, 40, 50, 75, 100
16	10, 20, 30, 40, 50, 75, 100, 125
20	10, 20, 30, 40, 50, 75, 100, 125, 150
25	10, 20, 30, 40, 50, 75, 100, 125, 150

#### Adjuster option

Nil	Without adjuster
AS	Adjuster on extension end
AT	Adjuster on retraction end
A	Adjuster on both ends
BS <sup>(1)</sup>	Absorber on extension end
BT <sup>(1)</sup>	Absorber on retraction end
B <sup>(1)</sup>	Absorber on both ends
ASBT <sup>(1)</sup>	Adjuster on extension end + Absorber on retraction end
BSAT <sup>(1)</sup>	Absorber on extension end + Adjuster on retraction end



Note 1) Options BS, BT and B are not available with the MXS6L series.

Note 2) Functional option is not available with the MXS□□L series.

#### Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

#### Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

\* For the applicable auto switch models, refer to the table below.

### Specifications

Specifications are the same as the standard type. Refer to page 55.

### Applicable Auto Switches/Refer to pages 1719 to 1827 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load	
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)			
Solid state switch	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	●	○	○	IC circuit
				3-wire (PNP)				M9PV	M9P	●	●	●	○	○	
				2-wire				M9BV	M9B	●	●	●	○	○	
				3-wire (NPN)				M9NWV	M9NW	●	●	●	○	○	
				3-wire (PNP)	24 V	5 V, 12 V	—	M9PWV	M9PW	●	●	●	○	○	IC circuit
				2-wire				M9BWV	M9BW	●	●	●	○	○	
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96V	A96	●	—	●	—	—	IC circuit
				2-wire	24 V	12 V	100 V	A93V	A93	●	—	●	—	—	—
			No	2-wire	24 V	12 V	100 V or less	A90V	A90	●	—	●	—	—	IC circuit

\* Lead wire length symbols: 0.5 m ..... Nil (Example) M9NW  
1 m ..... M (Example) M9NWM  
3 m ..... L (Example) M9NWL  
5 m ..... Z (Example) M9NWZ

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* Since there are additional applicable auto switches than are listed, refer to page 82 for details.

\* For details on auto switches with a pre-wired connector, refer to pages 1784 and 1785.

\* Auto switches are shipped together (not assembled).

MXH

MXU

MXS

MXQ

MXF

MXW

MXJ

MXP

MXY

MTS


D-□

-X□

Individual  
-X□

### Dimensions: MXS8L/Symmetric Type

## Basic style

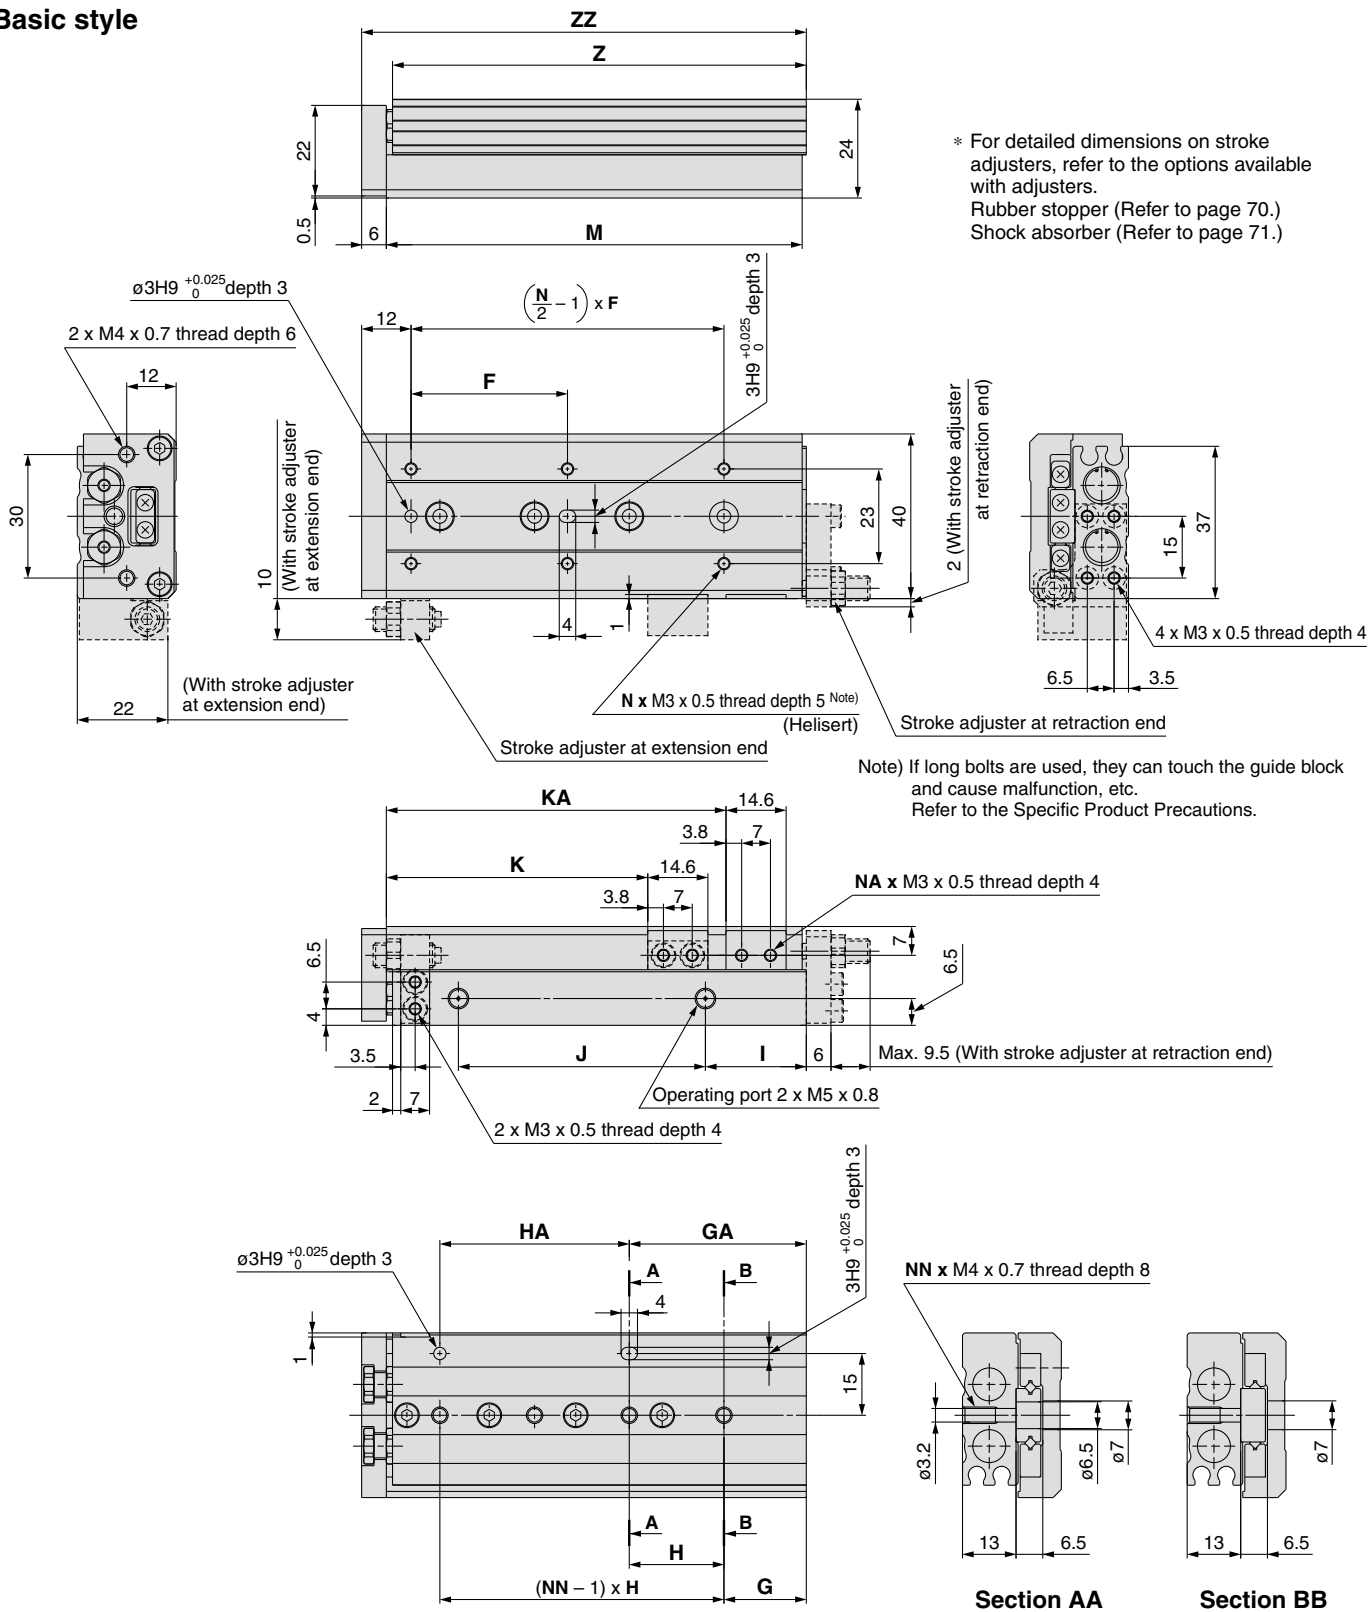

															(mm)
Model	F	N	G	H	NN	GA	HA	I	J	K	KA	NA	M	Z	ZZ
<b>MXS8L-10</b>	25	4	9	28	2	17	20	13	19.5	23.5	—	2	49	48.5	56
<b>MXS8L-20</b>	25	4	12	30	2	12	30	8.5	29	33.5	—	2	54	53.5	61
<b>MXS8L-30</b>	40	4	13	20	3	33	20	9.5	39	43.5	—	2	65	64.5	72
<b>MXS8L-40</b>	50	4	15	28	3	43	28	10.5	56	53.5	—	2	83	82.5	90
<b>MXS8L-50</b>	38	6	20	23	4	43	46	24.5	60	63.5	82.5	4	101	100.5	108
<b>MXS8L-75</b>	50	6	27	28	5	83	56	38.5	96	88.5	132.5	4	151	150.5	158

Regarding the external dimensions with a shock absorber, view the external dimensions of MXS8 symmetrically on page 61.

MXU

MXS

MXQ

MXF

MXW

MXJ

MXP

**MXY**

**MTS**