



4/5 Port Solenoid Valve

Power Consumption
0.1 W
With Power Saving Circuit

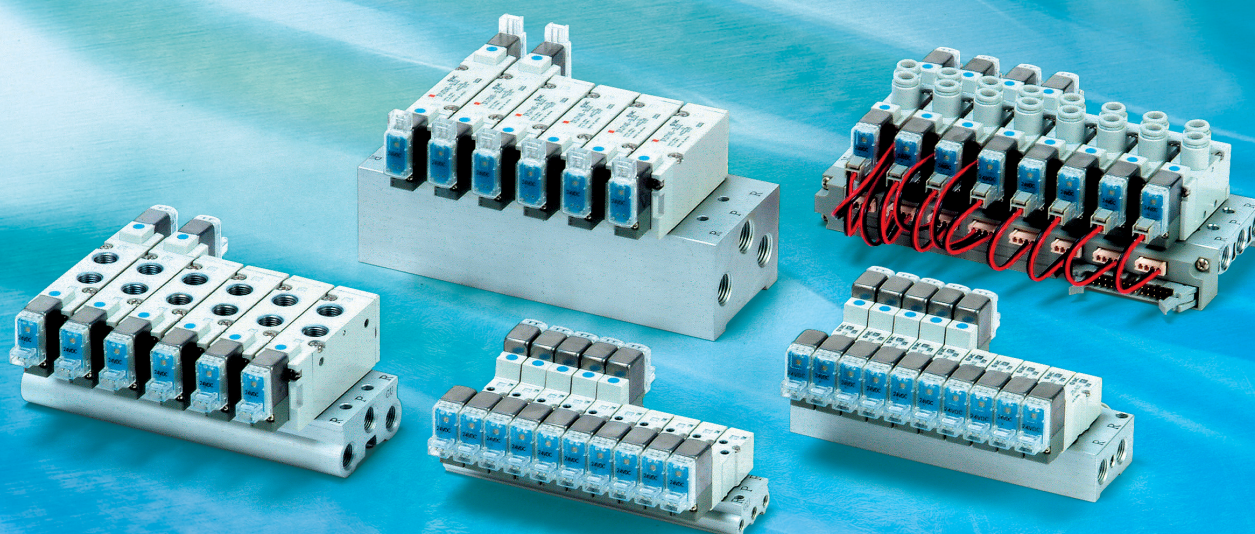

Series SYJ3000/5000/7000

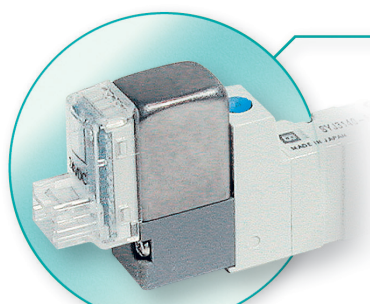

Cover (stainless steel)

● Improved pilot valve

Pilot valve cover is stronger using stainless steel.
Mounting thread is also reinforced from size M1.7 to M2.

● Flow Characteristics









Series	Flow characteristics		
	C [(dm ³ /s·bar)]	b	Cv
SYJ3000	0.46	0.36	0.12
SYJ5000	0.83	0.32	0.21
SYJ7000	2.9	0.35	0.74

Rubber Seal

4/5 Port Solenoid Valve

Series SYJ3000/5000/7000

Variations

	Series	Sonic conductance: C [dm ³ /(s·bar)]	Type of actuation	Voltage	Electrical entry	Option	Manual override
						With light/surge voltage suppressor	
Body ported	SYJ3000  P. 1	Effective area 0.9 mm ² { 4/2 → 5/3 } { (A/B → EA/EB) }		For DC ■ 24 VDC 12 VDC 6 VDC 5 VDC 3 VDC	Grommet 	For DC ■ With surge voltage suppressor	
	SYJ5000  P. 23	0.47 { 4/2 → 5/3 } { (A/B → EA/EB) }					
	SYJ7000  P. 47	2.4 { 4/2 → 5/3 } { (A/B → EA/EB) }					
Base mounted	SYJ3000  P. 1	0.46 { 4/2 → 5/3 } { (A/B → EA/EB) }	2 Position ● Single ● Double 3 Position ● Closed center ● Exhaust center ● Pressure center	For AC ■ 100 VAC ^{50/60} Hz 110 VAC ^{50/60} Hz 200 VAC ^{50/60} Hz 220 VAC ^{50/60} Hz	M plug connector 	For AC ■ Non-locking push type	
	SYJ5000  P. 23	0.83 { 4/2 → 5/3 } { (A/B → EA/EB) }					
	SYJ7000  P. 47	2.9 { 4/2 → 5/3 } { (A/B → EA/EB) }					



Note) All AC voltage models have built-in surge voltage suppressor.

Flow Characteristics/Weight

Valve model		Type of actuation		Port size		Flow characteristics ^{Note 1)}						Weight (g) ^{Note 2, 3)}			
				1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	L/M plug connector	DIN terminal	M8 connector
						C [dm³/(s·bar)]	b	Cv	C [dm³/(s·bar)]	b	Cv				
Body ported	SYJ7□20-□-01	2 position	Single	1/8	1/8	2.2	0.36	0.58	2.4	0.34	0.63	85	86	107	90
			Double			98	100	142	108						
		3 position	Closed center			1.8	0.37	0.45	2.0	0.35	0.49	108	110	152	118
			Exhaust center			1.2	0.50	0.34	3.0 [1.3]	0.35[0.52]	0.73 [0.39]				
			Pressure center			3.0 [0.83]	0.37 [0.50]	0.78 [0.25]	1.8	0.37	0.45				
	SYJ7□20-□-C6	2 position	Single	1/8	C6 (One-touch fitting for ø6)	1.6	0.33	0.4	2.2	0.32	0.53	96	97	98	101
			Double			109	111	153	119						
		3 position	Closed center			1.4	0.27	0.35	1.9	0.33	0.49	119	121	163	129
			Exhaust center			1.1	0.37	0.27	2.5 [1.3]	0.32[0.54]	0.61 [0.38]				
			Pressure center			1.8 [0.78]	0.36 [0.40]	0.45 [0.22]	1.6	0.30	0.39				
	SYJ7□20-□-C8	2 position	Single	1/8	C8 (One-touch fitting for ø8)	2.0	0.39	0.52	2.3	0.34	0.61	96	97	98	101
			Double			109	111	153	119						
		3 position	Closed center			1.7	0.35	0.42	2.0	0.29	0.49	119	121	163	129
			Exhaust center			1.2	0.38	0.33	2.6 [1.3]	0.35[0.49]	0.67 [0.38]				
			Pressure center			1.9 [0.86]	0.57 [0.46]	0.59 [0.25]	1.7	0.39	0.42				
Base mounted	SYJ7□40-□-01	2 position	Single	1/8	1/8	2.3	0.45	0.57	2.8	0.37	0.71	165 (85)	166 (86)	187 (107)	170 (90)
			Double			178 (98)	180 (100)	222 (142)	188 (108)						
		3 position	Closed center			1.9	0.36	0.48	2.1	0.46	0.57	188 (108)	190 (110)	232 (152)	198 (118)
			Exhaust center			1.2	0.48	0.35	3.4 [1.3]	0.36[0.57]	0.86 [0.41]				
			Pressure center			3.3 [0.85]	0.43 [0.54]	0.78 [0.25]	2.1	0.45	0.56				
	SYJ7□40-□-02	2 position	Single	1/4	1/4	2.3	0.41	0.61	2.9	0.35	0.74	165 (85)	166 (86)	187 (107)	170 (90)
			Double			178 (98)	180 (100)	222 (142)	188 (108)						
		3 position	Closed center			1.9	0.46	0.50	2.2	0.44	0.60	188 (108)	190 (110)	232 (152)	198 (118)
			Exhaust center			1.3	0.45	0.35	3.7 [1.4]	0.27[0.56]	0.87 [0.43]				
			Pressure center			3.6 [0.83]	0.23 [0.55]	0.84 [0.25]	2.1	0.47	0.58				



Note 1) []: denotes the normal position. Exhaust center: 4/2 → 5/3, Pressure center: 1 → 4/2

Note 2) (): Without sub-plate.


Note 3) For DC voltages. For AC voltages add 3 g to the weight of the single solenoid and 6 g to the weight of the double solenoid and 3 position types.

Cylinder Speed Chart


Body Ported

Use as a guide for selection.

Please confirm the actual conditions with SMC Sizing Program.

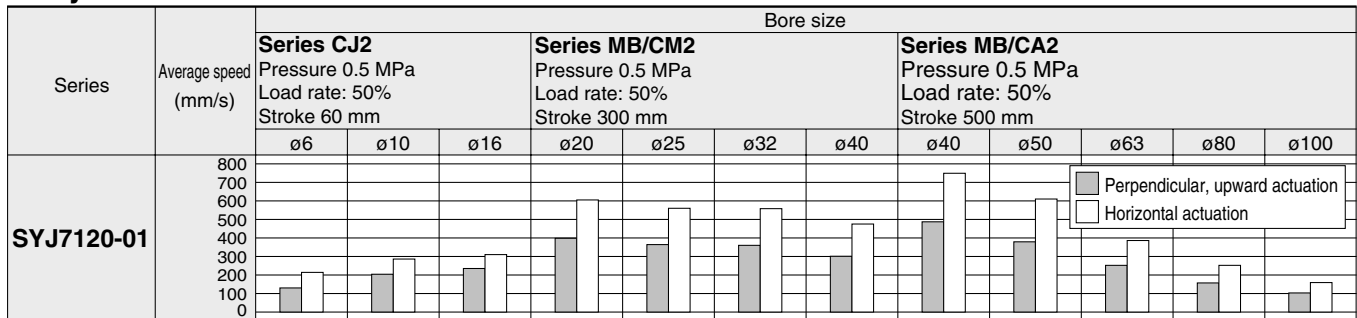

Base Mounted

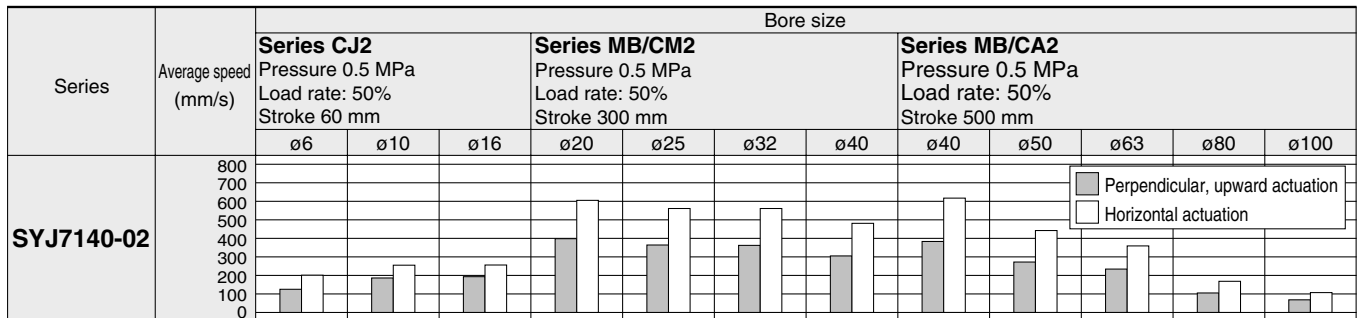

* Cylinder is in extending. Speed controller is meter-out, which is directly connected with cylinder and its needle is fully opened.

* Average speed of cylinder is obtained by dividing the full stroke time by the stroke.

* Load factor: ((Load weight x 9.8) / Theoretical force) x 100%

Conditions

	Body ported	Series CJ2	Series CM2	Series MB/CA2
SYJ7120-01	Tubing bore x Length	ø6 x 1 m		ø12 x 1 m
	Speed controller	AS2301F-06	AS3301F-06	AS4001F-12
	Silencer	AN110-01	AN200-02	

	Base mounted	Series CJ2	Series CM2	Series MB/CA2
SYJ7140-02	Tubing bore x Length	ø6 x 1 m		
	Speed controller	AS1301F-06	AS3001F-06	
	Silencer	AN110-01	AN200-02	AN3301F-06

How to Order

Type of actuation

1	2 position single solenoid
2	2 position double solenoid
3	3 position closed center
4	3 position exhaust center
5	3 position pressure center

Light/surge voltage suppressor

Electrical entry for G, H, L, M, W

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor
R	With surge voltage suppressor (Non-polar type)
U	With light/surge voltage suppressor (Non-polar type)

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
 * For type "R" and "U", DC voltage is only available.
 * Power saving circuit is only available in the "Z" type.

Electrical entry for D

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor (Non-polar type)
Z	With light/surge voltage suppressor (Non-polar type)

* DOZ is not available.
 * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Thread type


Nil	Rc
F	G
N	NPT
T	NPTF

A, B port size

01	1/8
C6	One-touch fitting for ø6
C8	One-touch fitting for ø8
N7	One-touch fitting for ø1/4"
N9	One-touch fitting for ø5/16"

Bracket

Nil: Without bracket
 F: With bracket




Note) Do not remove the factory installed bracket from models with the bracket option. Removal of the bracket will cause the valve to leak. Brackets cannot be retrofitted.

Rated voltage

DC	AC (50/60 Hz)
5	24 VDC
6	12 VDC
V	6 VDC
S	5 VDC
R	3 VDC
1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]

* DC specifications of type D and DO is only available with 12 and 24 VDC.
 * For type W□, DC voltage is only available.



Body ported


SYJ7 1 2 0 □ 5 M □ □ 01 □ □

Base mounted


SYJ7 2 4 0 □ 5 M □ □ □ □

Body option

0: Pilot valve individual exhaust for the pilot valve



3: Common exhaust type for main and pilot valve




Coil specifications

Nil	Standard
T	With power saving circuit <24 V, 12 VDC only>


* Power saving circuit is not available in the case of D, DO or W□ type.

Manual override


Nil: Non-locking push type



D: Push-turn locking slotted type



E: Push-turn locking lever type




Thread type

Nil	Rc
F	G
N	NPT
T	NPTF


Port size

Nil: Without sub-plate




(With gasket and screws)

01: 1/8 With sub-plate



02: 1/4 With sub-plate



Note) R1, R2 port: 1/4

Electrical entry

24, 12, 6, 5, 3 VDC 100, 110, 200, 220 VAC				24, 12 VDC 100, 110, 200, 220 VAC	24, 12, 6, 5, 3 VDC
Grommet	L plug connector	M plug connector		DIN terminal	M8 connector
G: Lead wire length 300 mm	L: With lead wire (Length 300 mm)	M: With lead wire (Length 300 mm)	MN: Without lead wire	D: With connector	WO: Without connector cable
H: Lead wire length 600 mm	LN: Without lead wire	LO: Without connector	MO: Without connector	DO: Without connector	W□: With connector cable Note 1)

Note 1) Enter the cable length symbols in □. Please be sure to fill in the blank referring to back page 10.

* LN, MN type: with 2 sockets.
 * DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 80.
 * For connector cable of M8 connector, refer to back page 10.