


Magnetic proximity switches with M8 3-pin connector for T-slot

Note for 2-wire switch Mod. CST-250N:

in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.



Cable length: 0.3 m

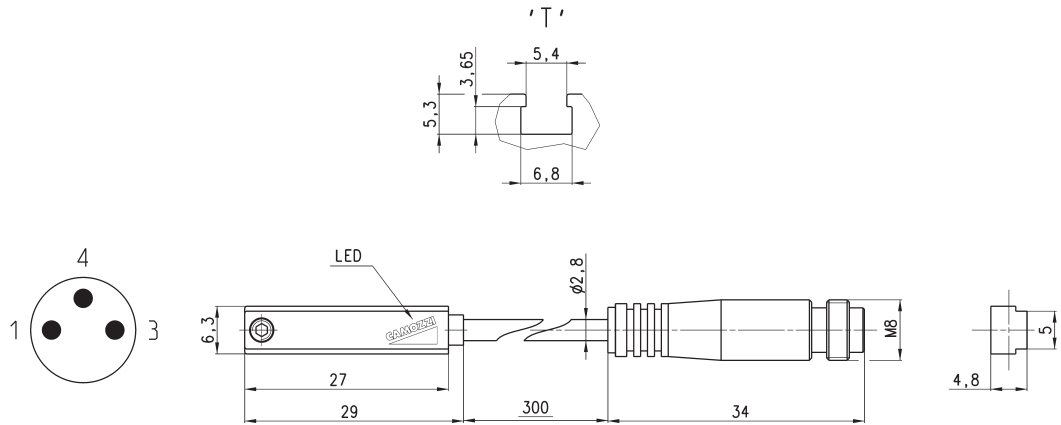

Mod.	Operation	Connection	Voltage	Output	Max. current	Max load	Protection
CST-250N	Reed	2 wires M8 male 3 pin	10 ÷ 110 V AC/DC	-	250 mA	10 VA / 8 W	None
CST-262	Reed	3 wires M8 male 3 pin	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing
CST-362	Magnetoresistive	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage
CST-562	Hall effect	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage


Magnetic proximity switches with M8 3-pin connector for V-slot

Note for 2-wire switch Mod. CSV-250N:

in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.



Cable length: 0.3 m

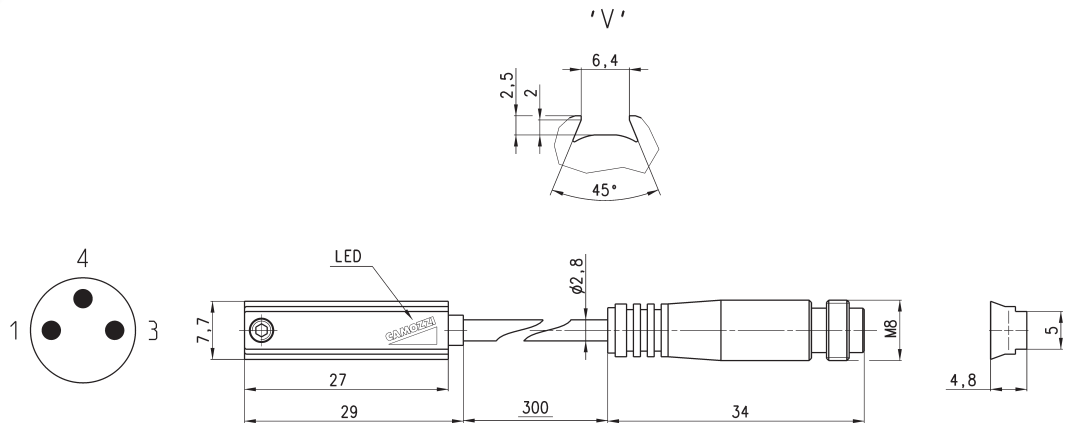

Mod.	Operation	Connection	Voltage	Output	Max. current	Max load	Protection
CSV-250N	Reed	2 wires M8 male 3 pin	10 ÷ 110 V AC/DC	-	250 mA	10 VA / 8 W	None
CSV-262	Reed	3 wires M8 male 3 pin	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing
CSV-362	Magnetoresistive	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage