



PDF technical sheet ESFD207M12



Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal, for low-temp. applications

Product definition	
B	25.40 mm
A	22 mm
A2	28.30 mm
B1	38.90 mm
d	35 mm
d1	51.10 mm
e	12.40 mm
G	R1/8"
H	126 mm
H	126 mm
J	100 mm
L	94 mm
N1	M12
s1	30.20 mm
S	9.50 mm

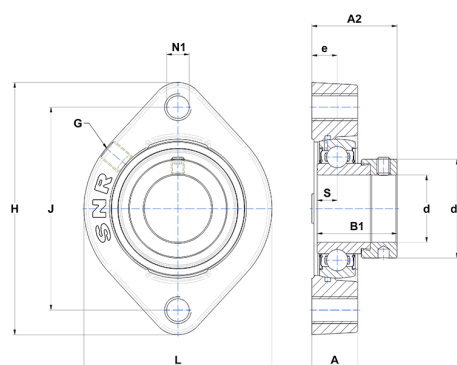

Product performance	
C	25.70 kN
C0	15.20 kN
T min.	-20 °C
T max.	100 °C

Other features	
Weight	1 kg
Recommended tightening torque for set screw	11.50 Nm
Designation of housing	FD207G
Designation of bearing	ES207G2