

PDF technical sheet


7020UCG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	100 mm
D	150 mm
B	24 mm
d1	116.90 mm
d2	113 mm
D1	133.20 mm
D2	141.10 mm
a	28.80 mm
Contact angle, α	15 °
rs min	1.50 mm
r1s min	1 mm
f0	16
Precision class	P42
Mass	1.27 kg
Brand	NTN

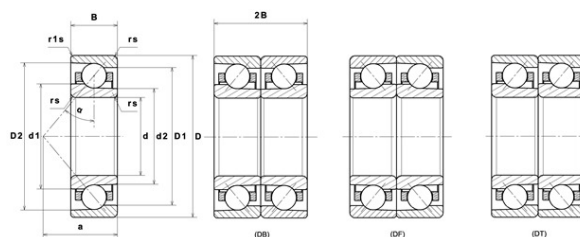

Product performance	
Dynamic load, C	77.50 kN
Static load, C0	81 kN
Nlim (oil)	15,000 Tr/min
Nlim (grease)	9,400 Tr/min
Preload level	GN
Peload value	460 kN
axial rigidity	126.1 N/ μ m
radial rigidity	730 N/ μ m
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.18 Hz
Characteristic outer ring frequency, BPF0	10.16 Hz
Characteristic inner ring frequency, BPF1	12.84 Hz

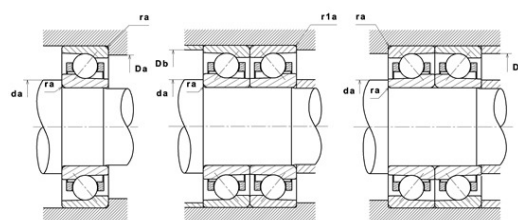

Abutment dimensions

da min	108.50 mm
Da max	141.50 mm
Db max	144.50 mm
r1a max	1 mm
ra max	1.50 mm
D6	116.90 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68	1	0	0.41	0.87	1	0.92	0.67	1.41
	30°		0.8								0.78

Equivalent static radial load

$$P_o = X_o.F_r + Y_o.F_a$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X _o	Y _o	X _o	Y _o
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $P_o < F_r$, then use $P_o = F_r$