

PDF technical sheet 6308SEE




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, spherical outer diameter, contact seals on both sides


Product definition

d	40 mm
D	90 mm
B	23 mm
d1	51.90 mm
D1	78.10 mm
rs min	1.50 mm
rNs min	0.55 mm
Radial clearance class	CN
Mass	0.61 kg
Brand	SNR

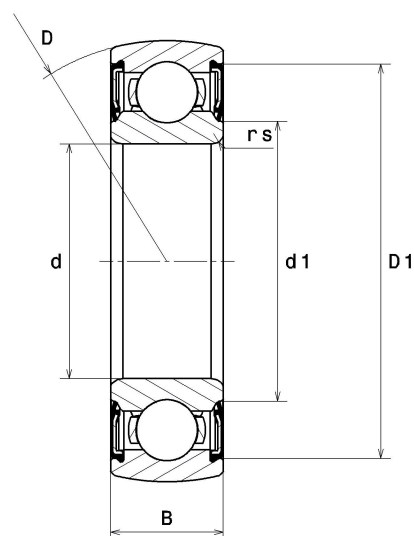

Product performance

Dynamic load, C	40.30 kN
Static load, C0	24 kN
Fatigue limit load, Cu	1.09 kN
f0	13.2
Nlim	5,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.08 Hz
Characteristic outer ring frequency, BPF0	3.07 Hz
Characteristic inner ring frequency, BPF1	4.93 Hz

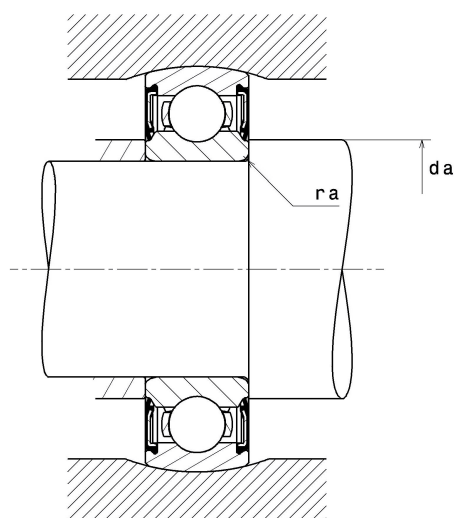

Abutment dimensions

da min	48 mm
da max	51.90 mm
Da max	82 mm
ra max	1.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$