


PDF technical sheet 6315EEC3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

Product definition	
d	75 mm
D	160 mm
B	37 mm
d1	94 mm
D1	140.90 mm
rs min	2.10 mm
Radial clearance class	C3
Mass	3.12 kg
Brand	SNR

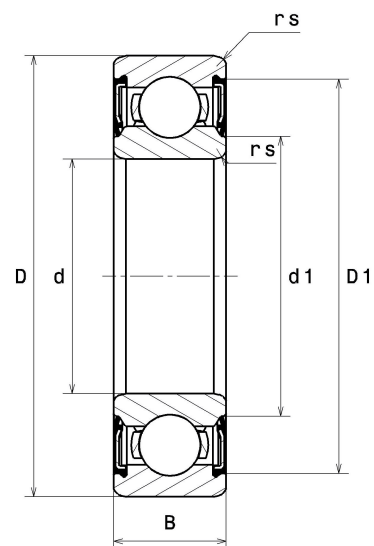

Product performance	
Dynamic load, C	113 kN
Static load, C0	77.20 kN
Fatigue limit load, Cu	3.25 kN
f0	13.2
Nlim	3,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.12 Hz
Characteristic outer ring frequency, BPF0	3.08 Hz
Characteristic inner ring frequency, BPF1	4.92 Hz

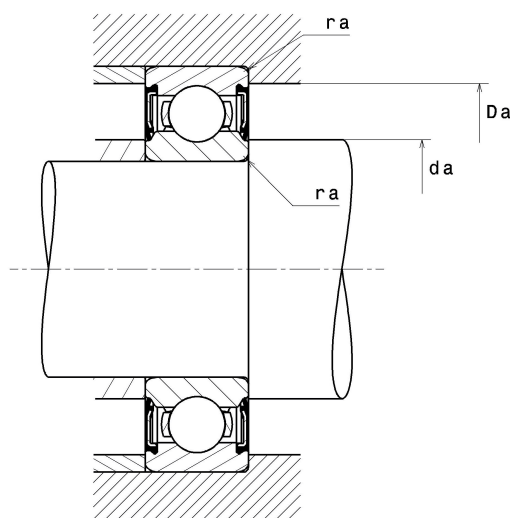

Abutment dimensions

da min	86 mm
da max	94 mm
Da max	149 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$