



PDF technical sheet ESFL207



Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal, for low-temp. applications

Product definition	
B	25.40 mm
A	34 mm
A1	14 mm
A2	34.90 mm
B1	38.90 mm
d	35 mm
d1	51.10 mm
e	19 mm
G	M6x1
H	161 mm
H	161 mm
J	130 mm
L	90 mm
N	16 mm
s1	30.20 mm
S	9.50 mm

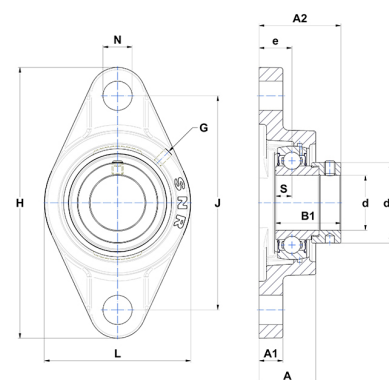

Product performance	
C	25.70 kN
C0	15.20 kN
T min.	-20 °C
T max.	100 °C

Other features	
Weight	1.20 kg
Recommended tightening torque for set screw	11.50 Nm
Designation of housing	FL207
Designation of bearing	ES207G2