



PDF technical sheet 6016ZZ




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, shields on both sides

Product definition	
d	80 mm
D	125 mm
B	22 mm
d1	89.30 mm
D1	115.30 mm
rs min	1.10 mm
Radial clearance class	CN
Mass	0.87 kg
Brand	SNR

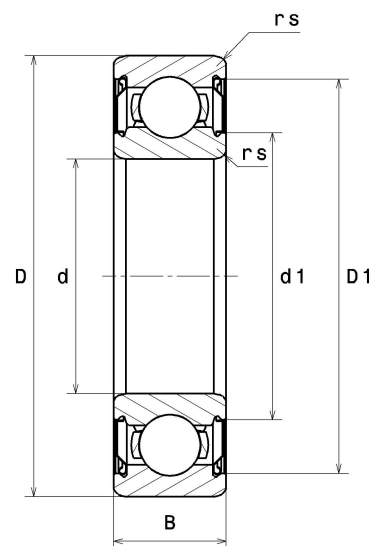

Product performance	
Dynamic load, C	47.10 kN
Static load, C0	39.80 kN
Fatigue limit load, Cu	1.79 kN
f0	15.6
Nref	6,100 Tr/min
Nlim	7,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.46 Hz
Characteristic outer ring frequency, BPF0	6.08 Hz
Characteristic inner ring frequency, BPF1	7.92 Hz

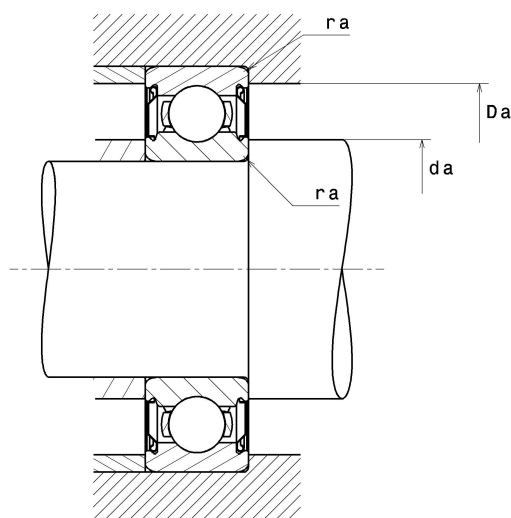

Abutment dimensions

da min	86.50 mm
da max	89.30 mm
Da max	118.50 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot F_r + Y \cdot F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot F_r + Y_0 \cdot F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$