

PDF technical sheet 6328L1C3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, machined cage, open


Product definition

d	140 mm
D	300 mm
B	62 mm
rs min	4 mm
Radial clearance class	C3
Mass	18.50 kg
Brand	NTN

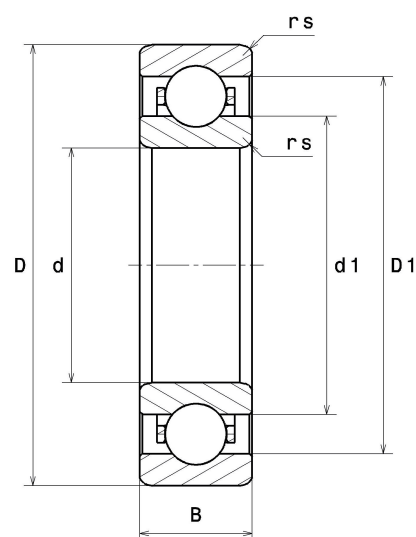

Product performance

Dynamic load, C	253 kN
Static load, C0	246 kN
Fatigue limit load, Cu	7.50 kN
f0	13.6
Nlim (oil)	2,600 Tr/min
Nlim (grease)	2,200 Tr/min
Min operating temperature, Tmin	-60 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.40 Hz
Characteristic outer ring frequency, BPF0	3.13 Hz
Characteristic inner ring frequency, BPF1	4.87 Hz

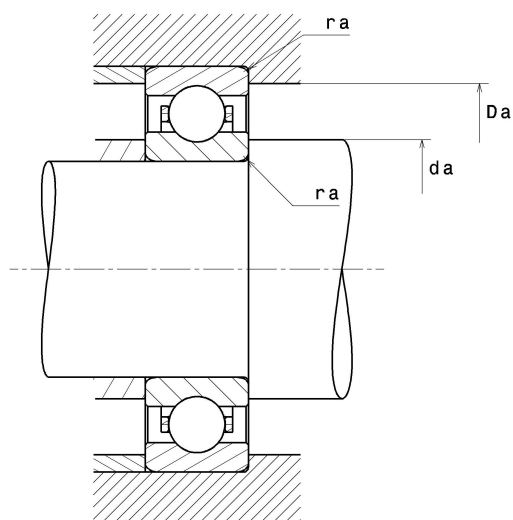

Abutment dimensions

da min	156 mm
Da max	284 mm
ra max	3 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$