

PDF technical sheet


7005UCG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	25 mm
D	47 mm
B	12 mm
d1	32.60 mm
d2	30.90 mm
D1	39.40 mm
D2	42.90 mm
a	10.90 mm
Contact angle, α	15 °
rs min	0.60 mm
r1s min	0.30 mm
f0	14.7
Precision class	P42
Mass	0.08 kg
Brand	NTN

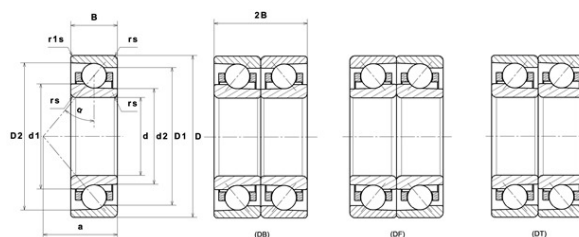

Product performance	
Dynamic load, C	12.30 kN
Static load, C0	8 kN
Nlim (oil)	52,100 Tr/min
Nlim (grease)	32,500 Tr/min
Preload level	GN
Peload value	78 kN
axial rigidity	41.5 N/ μ m
radial rigidity	222.8 N/ μ m
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.51 Hz
Characteristic outer ring frequency, BPF0	5.81 Hz
Characteristic inner ring frequency, BPFI	8.19 Hz

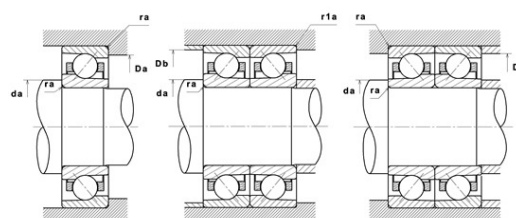

Abutment dimensions

da min	29.50 mm
Da max	42.50 mm
Db max	44.50 mm
r1a max	0.30 mm
ra max	0.60 mm
D6	33.10 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8				0.39		0.78		1.24

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X_0	Y_0	X_0	Y_0
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $P_0 < Fr$, then use $P_0 = Fr$