



PDF technical sheet EXFLE207N



Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger, for low-temp. applications

Product definition	
B	37.60 mm
A	33.70 mm
A1	12.50 mm
A2	38.80 mm
B1	51.10 mm
d	35 mm
d1	51.10 mm
e	20 mm
G	R1/8"
H	155 mm
H	155 mm
J	130 mm
L	92 mm
N	14 mm
s1	36.30 mm
S	18.80 mm
Z	30.90 mm

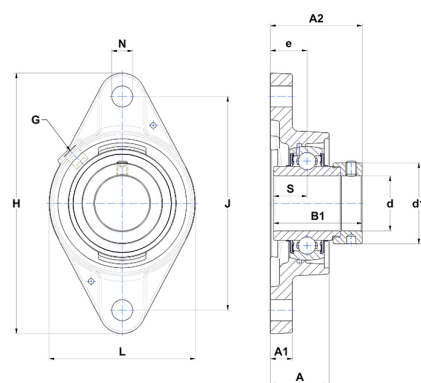

Product performance	
C	25.70 kN
C0	15.20 kN
T min.	-20 °C
T max.	100 °C

Other features	
Weight	1.20 kg
Recommended tightening torque for set screw	11.50 Nm
Designation of housing	FLE207N
Designation of bearing	EX207G2