



## PDF technical sheet ESFLE209N



### Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal, for low-temp. applications

| Product definition |           |
|--------------------|-----------|
| B                  | 30.20 mm  |
| A                  | 37.50 mm  |
| A1                 | 13 mm     |
| A2                 | 43.20 mm  |
| B1                 | 43.70 mm  |
| d                  | 45 mm     |
| d1                 | 62 mm     |
| e                  | 24 mm     |
| G                  | R1/8"     |
| H                  | 180 mm    |
| H                  | 180 mm    |
| J                  | 148.50 mm |
| L                  | 111 mm    |
| N                  | 14 mm     |
| s1                 | 33.40 mm  |
| S                  | 11 mm     |
| Z                  | 34.80 mm  |

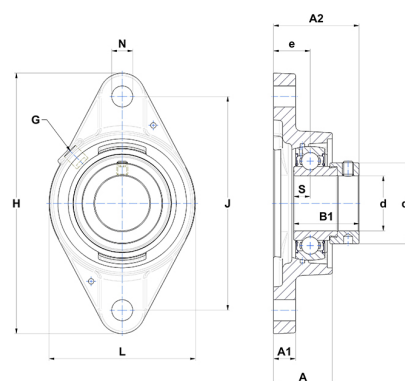

| Product performance |          |
|---------------------|----------|
| C                   | 31.85 kN |
| C0                  | 20.80 kN |
| T min.              | -20 °C   |
| T max.              | 100 °C   |

| Other features                              |          |
|---------------------------------------------|----------|
| Weight                                      | 1.79 kg  |
| Recommended tightening torque for set screw | 11.50 Nm |
| Designation of housing                      | FLE209N  |
| Designation of bearing                      | ES209G2  |