


PDF technical sheet 7212BA




Single row or matched pairs of angular contact ball bearings

Angular contact ball bearing, polyamide cage.

Product definition	
d	60 mm
D	110 mm
B	22 mm
d1	79.50 mm
d2	66.50 mm
D1	91.10 mm
D2	103.70 mm
a	47 mm
Contact angle, α	40 °
rs min	1.50 mm
r1s min	1 mm
Mass	0.80 kg
Brand	SNR

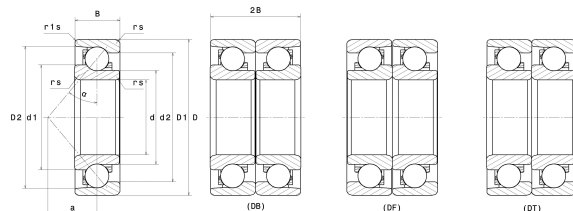

Product performance	
Dynamic load, C	53.60 kN
Static load, C0	44.40 kN
Fatigue limit load, Cu	2.02 kN
Nref	6,600 Tr/min
Nlim	6,900 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	5.24 Hz
Characteristic outer ring frequency, BPF0	6.43 Hz
Characteristic inner ring frequency, BPF1	8.57 Hz

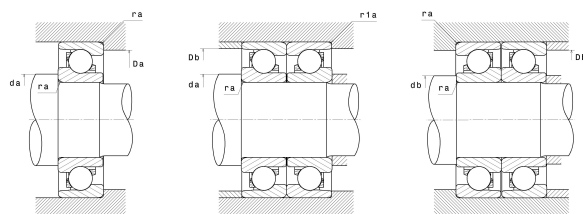

Abutment dimensions	
da min	68.50 mm
db min	68.50 mm
Da max	101.50 mm
Db max	104.50 mm
r1a max	1 mm
ra max	1.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

	e	Single or DT bearing arrangement				DB or DF arrangement			
		Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y	X	Y	X	Y
30°	0.8	1	0	0.9	0.76	1	0.78	0.63	1.24
40°	1.14			0.35	0.57		0.55	0.57	0.93

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

a	Single or DT bearing arrangement		DB or DF arrangement	
	X ₀	Y ₀	X ₀	Y ₀
30°	0.5	0.33	1	0.66
40°		0.26		0.52

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$