


PDF technical sheet ML7012CVUJ74S




High precision angular contact ball bearings

High precision angular contact ball bearing, high speed series ML, laminated resin cage centred on outer ring


Product definition

d	60 mm
D	95 mm
B	18 mm
d1	71.90 mm
d2	70.10 mm
D1	84.91 mm
D2	88.11 mm
a	21 mm
Contact angle, α	17 °
rs min	1.10 mm
r1s min	1 mm
f0	8.327
Precision class	P4S
Mass	0.43 kg
Brand	SNR

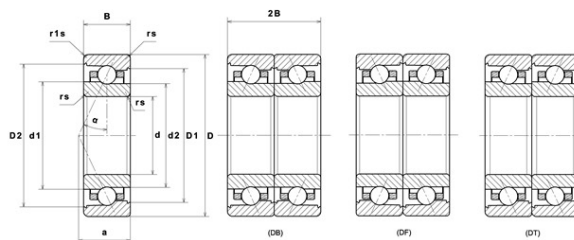

Product performance

Dynamic load, C	17 kN
Static load, C0	12 kN
Fatigue limit load, Cu	0.66 kN
Nlim (oil)	28,000 Tr/min
Nlim (grease)	21,000 Tr/min
Axial displacement K Factor	0.99
Preload level	7
Peloid value	90 kN
axial rigidity	65 N/ μ m
radial rigidity	318 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	9.54 Hz
Characteristic outer ring frequency, BPF0	10.81 Hz
Characteristic inner ring frequency, BPF1	13.19 Hz

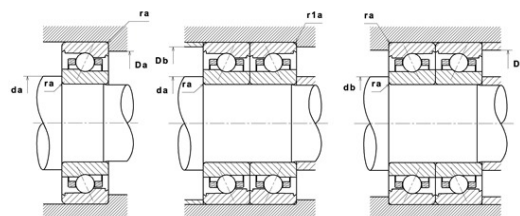

Abutment dimensions

da min	67 mm
db min	67 mm
Da max	88 mm
Db max	88 mm
r1a max	1 mm
ra max	1 mm
D6	74.40 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$