


PDF technical sheet EXFLE209N



Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger, for low-temp. applications

Product definition	
B	42.80 mm
A	37.50 mm
A1	13 mm
A2	45.40 mm
B1	56.30 mm
d	45 mm
d1	62 mm
e	24 mm
G	R1/8"
H	180 mm
H	180 mm
J	148.50 mm
L	111 mm
N	14 mm
s1	39.70 mm
S	21.40 mm
Z	34.80 mm

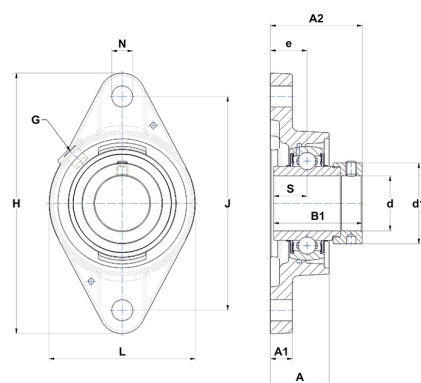

Product performance	
C	31.85 kN
C0	20.80 kN
T min.	-20 °C
T max.	100 °C

Other features	
Weight	1.97 kg
Recommended tightening torque for set screw	11.50 Nm
Designation of housing	FLE209N
Designation of bearing	EX209G2