


MERKEL WIPER ASOB

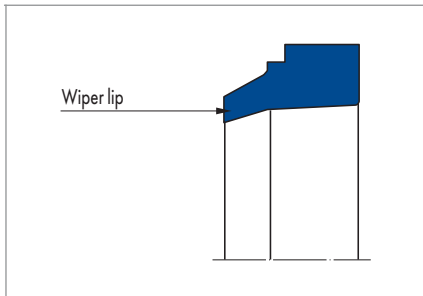

PRODUCT DESCRIPTION

Dirt wiper with protruding wiper lip without metal reinforcement.

PRODUCT ADVANTAGES

Single-acting wiper for the protection of cylinders against ingress of dirt.

APPLICATION

- Standard cylinders

MATERIAL

Material	Code	Hardness
Nitrile rubber NBR	88 NBR 101	88 Shore A

OPERATING CONDITIONS

Running speed v	2 m/s
-----------------	-------

Medium/ Temperature	88 NBR 101
Hydraulic oils HL, HLP	-30 °C ... +100 °C
HFA fluids	+5 °C ... +60 °C
HFB fluids	+5 °C ... +60 °C
HFC fluids	-30 °C ... +60 °C
HFD fluids	-
Water	+5 °C ... +90 °C
HETG (rapeseed oil)	-30 °C ... +80 °C
HEES (synthetic ester)	-
HEPG (glycol)	-30 °C ... +60 °C
Mineral greases	-30 °C ... +100 °C

DESIGN NOTES

Please observe our general design notes in → Technical Manual.

Surface quality

Peak-to-valley heights	R_a	R_{max}
Sliding surface	* μm	* μm
Groove base	$\leq 1,6 \mu\text{m}$	$\leq 6,3 \mu\text{m}$
Groove flanks	$\leq 3,0 \mu\text{m}$	$\leq 15,0 \mu\text{m}$

* Surface roughness of the sliding surface to suit the sealing component used.

Tolerances

Nominal $\varnothing d$	D	D_1
8 ... 160 mm	H11	H11

The tolerance for the $\varnothing d$ is defined by the buffer seal.

FITTING & INSTALLATION

Careful fitting is a prerequisite for the correct function of the wiper. Merkel Wiper ASOB wipers can be quickly and easily fitted by deforming into a kidney shape. → Technical Manual.

Lead-in chamfers

Length and angle are to be designed to suit the rod seal used.