



## PDF technical sheet 6204HT200ZZ




### Single row deep groove ball bearings

TOPLINE deep groove ball bearing, radial contact, pressed steel cage, shields on both sides, applications upto 200 °C.

| Product definition     |          |
|------------------------|----------|
| d                      | 20 mm    |
| D                      | 47 mm    |
| B                      | 14 mm    |
| d1                     | 25.90 mm |
| D1                     | 41.40 mm |
| rs min                 | 1 mm     |
| Radial clearance class | C4       |
| Mass                   | 0.11 kg  |
| Brand                  | SNR      |

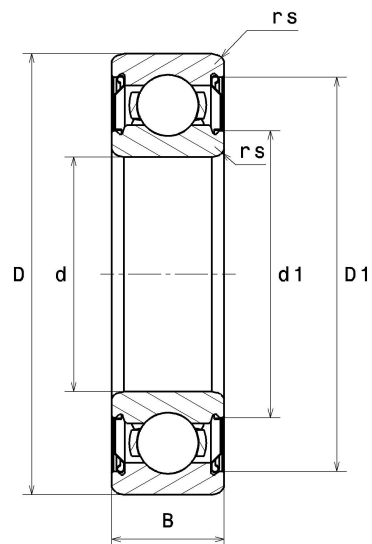

| Product performance                           |               |
|-----------------------------------------------|---------------|
| Dynamic load, C                               | 12.60 kN      |
| Static load, C0                               | 6.60 kN       |
| Fatigue limit load, Cu                        | 0.30 kN       |
| f0                                            | 13.1          |
| Nref                                          | 16,000 Tr/min |
| Nlim                                          | 9,100 Tr/min  |
| Min operating temperature, Tmin               | -20 °C        |
| Max operating temperature, Tmax               | 200 °C        |
| Characteristic cage frequency, FTF            | 0.38 Hz       |
| Characteristic rolling element frequency, BSF | 3.98 Hz       |
| Characteristic outer ring frequency, BPF0     | 3.05 Hz       |
| Characteristic inner ring frequency, BPF1     | 4.95 Hz       |

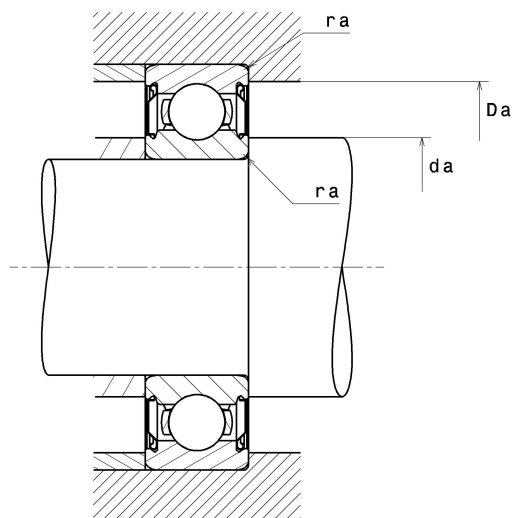

### Abutment dimensions

|        |          |
|--------|----------|
| da min | 25 mm    |
| da max | 25.90 mm |
| Da max | 42 mm    |
| ra max | 1 mm     |

### Calculation factors

#### Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

| $\frac{f_0 F_a}{C_0}$ | e    | $F_a / F_r \leq e$ |   | $F_a / F_r > e$ |      |
|-----------------------|------|--------------------|---|-----------------|------|
|                       |      | X                  | Y | X               | Y    |
| 0.172                 | 0.19 | 1                  | 0 | 0.56            | 2.3  |
| 0.345                 | 0.22 |                    |   |                 | 1.99 |
| 0.689                 | 0.26 |                    |   |                 | 1.71 |
| 1.03                  | 0.28 |                    |   |                 | 1.55 |
| 1.38                  | 0.3  |                    |   |                 | 1.45 |
| 2.07                  | 0.34 |                    |   |                 | 1.31 |
| 3.45                  | 0.38 |                    |   |                 | 1.15 |
| 5.17                  | 0.42 |                    |   |                 | 1.04 |
| 6.89                  | 0.44 |                    |   |                 | 1    |

#### Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

| $X_0$ | $Y_0$ |
|-------|-------|
| 0.6   | 0.5   |

For single or DT bearing arrangement:

If  $P_0 < F_r$ , then use  $P_0 = F_r$