



PDF technical sheet EXFLE210



Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger, for low-temp. applications

Product definition	
B	49.20 mm
A	41.60 mm
A1	13 mm
A2	48.60 mm
B1	62.70 mm
d	50 mm
d1	67.20 mm
e	24 mm
G	R1/8"
H	190 mm
H	190 mm
J	157 mm
L	116 mm
N	18 mm
s1	42.90 mm
S	24.60 mm

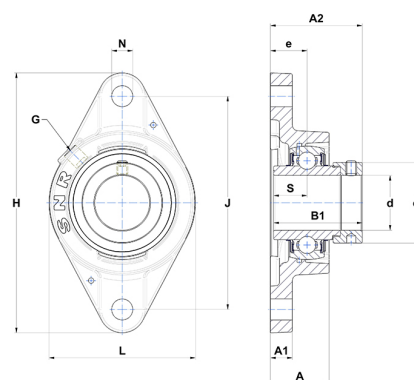

Product performance	
C	35.10 kN
C0	23.20 kN
T min.	-20 °C
T max.	100 °C

Other features	
Weight	2.31 kg
Recommended tightening torque for set screw	11.50 Nm
Designation of housing	FLE210
Designation of bearing	EX210G2