

PDF technical sheet


7000UADG/GLP42




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	10 mm
D	26 mm
B	8 mm
d1	15.20 mm
d2	14 mm
D1	20.40 mm
D2	22.90 mm
a	8.20 mm
Contact angle, α	25 °
rs min	0.30 mm
r1s min	0.15 mm
f0	13
Precision class	P42
Mass	0.02 kg
Brand	NTN

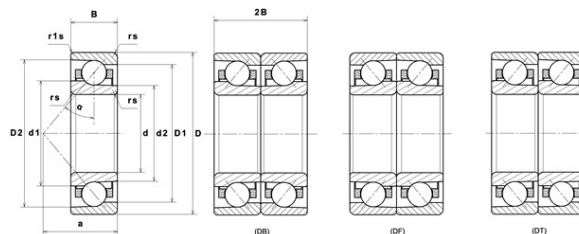

Product performance	
Dynamic load, C	5.15 kN
Static load, C0	2.40 kN
Nlim (oil)	92,100 Tr/min
Nlim (grease)	57,000 Tr/min
Preload level	GL
Peload value	20 kN
axial rigidity	32.2 N/ μ m
radial rigidity	70 N/ μ m
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	3.52 Hz
Characteristic outer ring frequency, BPF0	3.41 Hz
Characteristic inner ring frequency, BPF1	5.59 Hz

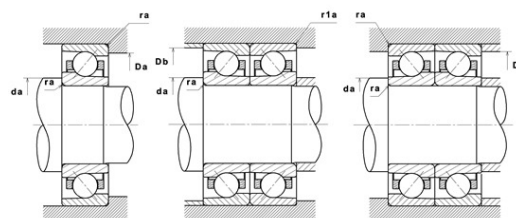

Abutment dimensions

da min	12.50 mm
Da max	23.50 mm
Db max	24.80 mm
r1a max	0.15 mm
ra max	0.30 mm
D6	15.40 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement							
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e					
				X	Y	X	Y	X	Y	X	Y				
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39				
		0.357	0.4				1.4		1.57		2.28				
		0.714	0.43				1.3		1.46		2.11				
		1.07	0.46				1.23		1.38		2				
		1.43	0.47				1.19		1.34		1.93				
		2.14	0.5				1.12		1.26		1.82				
		3.57	0.55				1.02		1.14		1.66				
		5.35	0.56						1.12		1.63				
		7.14	0.56				1		1.12		1.63				
	25°		0.68	1	0	0.41	0.87	1	0.92	0.67	1.41				
	30°		0.8				0.39		0.78		1.24				

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			Xo	Yo	Xo	Yo
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$