


PDF technical sheet 6206KZZC3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, tapered bore, shields on both sides


Product definition

d	30 mm
D	62 mm
B	16 mm
d1	37.90 mm
D1	55.10 mm
rs min	1 mm
Associated sleeve reference	H206
Radial clearance class	C3
Mass	0.20 kg
Brand	SNR

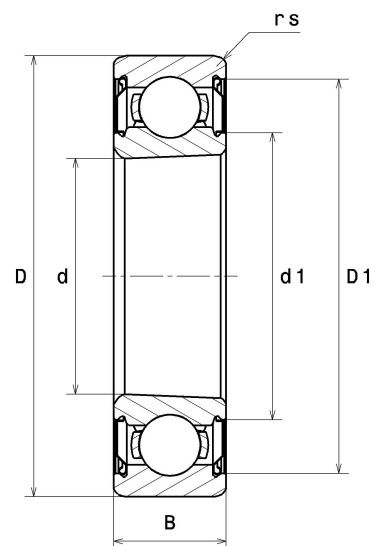

Product performance

Dynamic load, C	19.50 kN
Static load, C0	11.30 kN
Fatigue limit load, Cu	0.51 kN
f0	13.8
Nref	12,000 Tr/min
Nlim	15,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.62 Hz
Characteristic outer ring frequency, BPF0	3.57 Hz
Characteristic inner ring frequency, BPF1	5.43 Hz

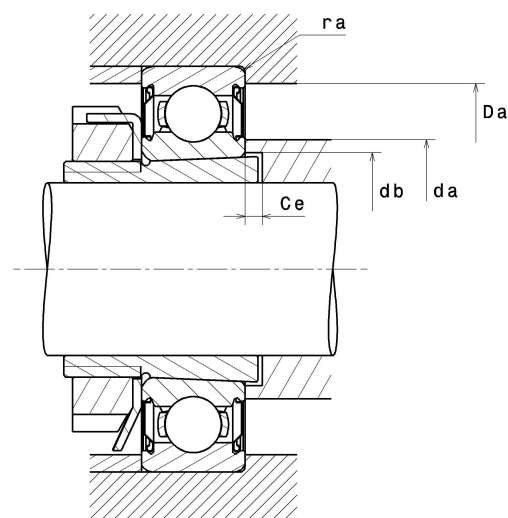

Abutment dimensions

da min	35 mm
da max	37.90 mm
Da max	57 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$