


PDF technical sheet 6017NR




Single row deep groove ball bearings

Product definition	
d	85 mm
D	130 mm
B	22 mm
a min	2.67 mm
a max	2.87 mm
Ca min	5.39 mm
Ca max	5.69 mm
rs min	1.10 mm
rNs min	0.50 mm
D3 max	125.22 mm
b min	3.10 mm
b max	3.40 mm
r0 max	0.60 mm
D4 max	139.70 mm
f	2.82 mm
Snap ring reference	R130
Radial clearance class	CN
Mass	0.89 kg
Brand	NTN

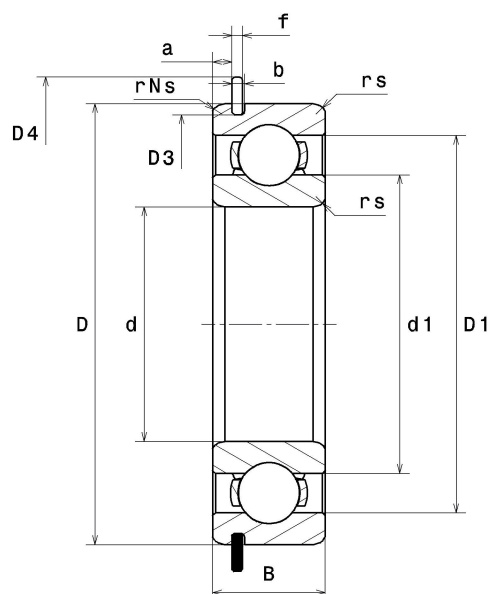

Product performance	
Dynamic load, C	49.50 kN
Static load, C0	43 kN
Fatigue limit load, Cu	1.89 kN
f0	15.8
Nlim (oil)	5,900 Tr/min
Nlim (grease)	5,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.84 Hz
Characteristic outer ring frequency, BPF0	6.56 Hz
Characteristic inner ring frequency, BPF1	8.44 Hz

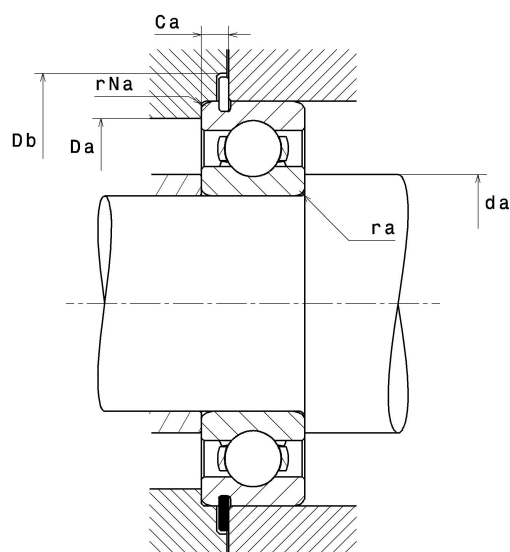

Abutment dimensions

da min	91.50 mm
Da max	123.50 mm
ra max	1 mm
rNa max	0.50 mm
Db min	141.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$