

PDF technical sheet 7313BL1G




Single row or matched pairs of angular contact ball bearings

Angular contact ball bearing, brass cage inner ring guided

Product definition	
d	65 mm
D	140 mm
B	33 mm
a	59.50 mm
Contact angle, α	40 °
rs min	2.10 mm
r1s min	1.10 mm
Radial clearance class	CN
Mass	2.44 kg
Brand	NTN



Product performance	
Dynamic load, C	102 kN
Static load, C0	75 kN
Fatigue limit load, Cu	3.35 kN
Nlim (oil)	6,300 Tr/min
Nlim (grease)	4,700 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	4.17 Hz
Characteristic outer ring frequency, BPF0	4.93 Hz
Characteristic inner ring frequency, BPF1	7.07 Hz

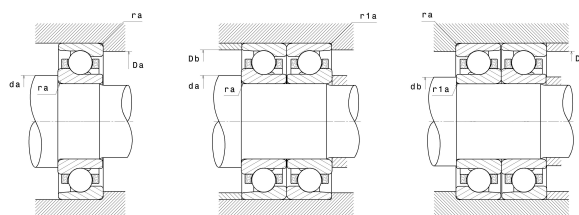

Abutment dimensions	
da min	77 mm
db min	72 mm
Da max	128 mm
Db max	133 mm
r1a max	1 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

	e	Single or DT bearing arrangement				DB or DF arrangement			
		Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y	X	Y	X	Y
30°	0.8	1	0	0.9	0.76	1	0.78	0.63	1.24
40°	1.14			0.35	0.57		0.55	0.57	0.93

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

a	Single or DT bearing arrangement		DB or DF arrangement	
	X ₀	Y ₀	X ₀	Y ₀
30°	0.5	0.33	1	0.66
40°		0.26		0.52

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$