


PDF technical sheet


10R71918HVUJ74




High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	90 mm
D	125 mm
B	18 mm
d1	101.20 mm
D1	113.75 mm
D2	119.24 mm
a	34 mm
Contact angle, α	25 °
rs min	0.60 mm
r1s min	0.60 mm
f0	16.708
Precision class	P4
Mass	0.56 kg
Brand	SNR

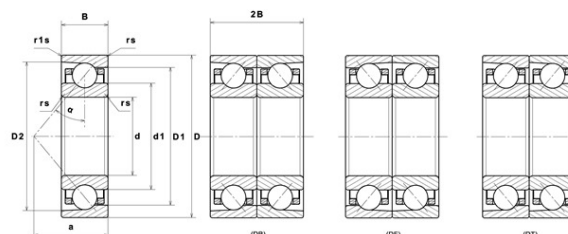

Product performance	
Dynamic load, C	37.90 kN
Static load, C0	41.90 kN
Fatigue limit load, Cu	2.29 kN
Nlim (oil)	15,000 Tr/min
Nlim (grease)	9,800 Tr/min
Axial displacement K Factor	0.45
Preload level	7
Peload value	320 kN
axial rigidity	215 N/ μ m
radial rigidity	465 N/ μ m
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.34 Hz
Characteristic outer ring frequency, BPF0	11.87 Hz
Characteristic inner ring frequency, BPF1	14.13 Hz

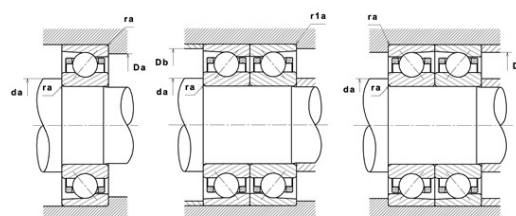

Abutment dimensions

da min	94.50 mm
db min	94.50 mm
Da max	120.50 mm
Db max	120.50 mm
r1a max	0.60 mm
ra max	0.60 mm
D6	104.50 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $P_0 < Fr$, then use $P_0 = Fr$