



PDF technical sheet 6208F604




Single row deep groove ball bearings

TOPLINE deep groove ball bearing, radial contact, pressed steel cage, shields on both sides, applications upto 350 °C.

Product definition	
d	40 mm
D	80 mm
B	18 mm
d1	50.30 mm
D1	70.40 mm
rs min	1.10 mm
Radial clearance class	> C5
Mass	0.35 kg
Brand	SNR

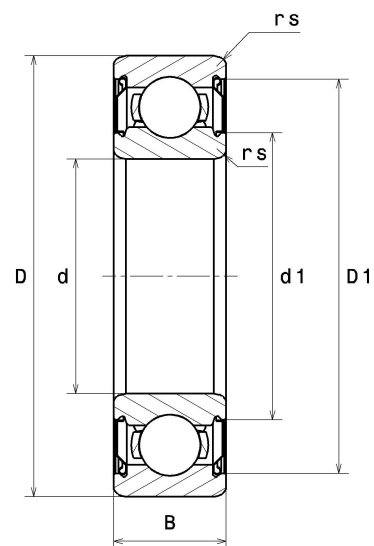

Product performance	
Dynamic load, C	0.01 kN
Static load, C0	0.01 kN
Fatigue limit load, Cu	0.00 kN
f0	14
Nlim	50 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	350 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.84 Hz
Characteristic outer ring frequency, BPF0	3.61 Hz
Characteristic inner ring frequency, BPF1	5.39 Hz

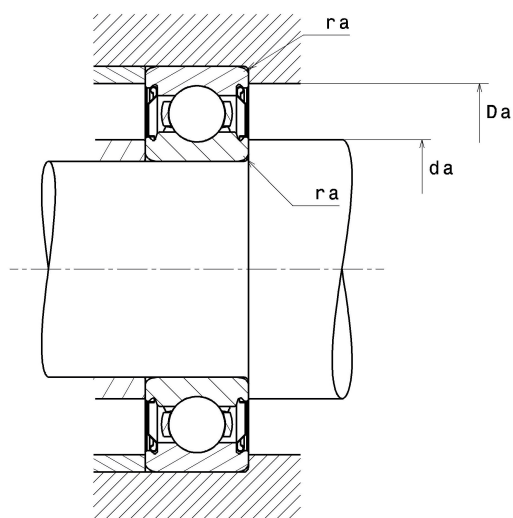

Abutment dimensions

da min	46.50 mm
Da max	73.50 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$