


## PDF technical sheet ESPAE207



### Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal, for low-temp. applications

| Product definition |          |
|--------------------|----------|
| A                  | 45 mm    |
| A1                 | 27 mm    |
| B                  | 25.40 mm |
| B1                 | 38.90 mm |
| d                  | 35 mm    |
| d1                 | 51.10 mm |
| E                  | 12.50 mm |
| G                  | R1/8"    |
| H                  | 47.60 mm |
| H1                 | 12 mm    |
| H2                 | 93 mm    |
| J                  | 82.60 mm |
| L                  | 103 mm   |
| L1                 | 22.50 mm |
| N                  | M10 mm   |
| s1                 | 30.20 mm |
| S                  | 9.50 mm  |

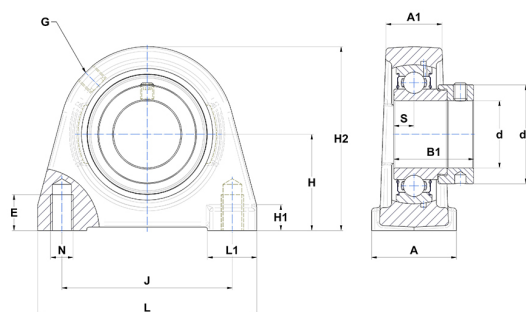

| Product performance |          |
|---------------------|----------|
| C                   | 25.70 kN |
| C0                  | 15.20 kN |
| T min.              | -20 °C   |
| T max.              | 100 °C   |

| Other features                              |          |
|---------------------------------------------|----------|
| Weight                                      | 1.40 kg  |
| Recommended tightening torque for set screw | 11.50 Nm |
| Designation of housing                      | PAE207   |
| Designation of bearing                      | ES207G2  |