



## PDF technical sheet EXFA207N



### Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger, for low-temp. applications

| Product definition |          |
|--------------------|----------|
| B                  | 37.60 mm |
| A                  | 34 mm    |
| A1                 | 16 mm    |
| A2                 | 37.80 mm |
| B1                 | 51.10 mm |
| d                  | 35 mm    |
| d1                 | 51.10 mm |
| e                  | 19 mm    |
| G                  | M6x1     |
| H                  | 161 mm   |
| H                  | 161 mm   |
| J                  | 130 mm   |
| J1                 | 66 mm    |
| L                  | 90 mm    |
| L1                 | 82 mm    |
| N                  | 15 mm    |
| s1                 | 36.30 mm |
| S                  | 18.80 mm |
| Z                  | 30 mm    |

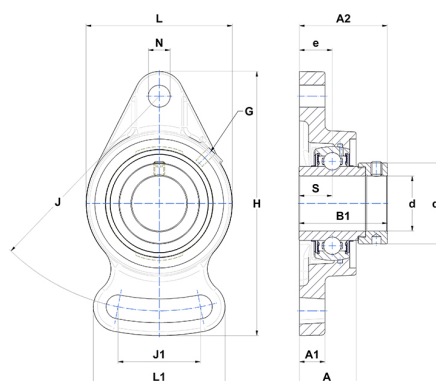

| Product performance |          |
|---------------------|----------|
| C                   | 25.70 kN |
| C0                  | 15.20 kN |
| T min.              | -20 °C   |
| T max.              | 100 °C   |

| Other features                              |          |
|---------------------------------------------|----------|
| Weight                                      | 1.40 kg  |
| Recommended tightening torque for set screw | 11.50 Nm |
| Designation of housing                      | FA207N   |
| Designation of bearing                      | EX207G2  |