



## PDF technical sheet EXFL206N



### Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger, for low-temp. applications

| Product definition |          |
|--------------------|----------|
| B                  | 36.40 mm |
| A                  | 31 mm    |
| A1                 | 13 mm    |
| A2                 | 36.20 mm |
| B1                 | 48.30 mm |
| d                  | 30 mm    |
| d1                 | 44.10 mm |
| e                  | 18 mm    |
| G                  | M6x1     |
| H                  | 148 mm   |
| H                  | 148 mm   |
| J                  | 117 mm   |
| L                  | 80 mm    |
| N                  | 16 mm    |
| s1                 | 34.10 mm |
| S                  | 18.20 mm |
| Z                  | 27.50 mm |

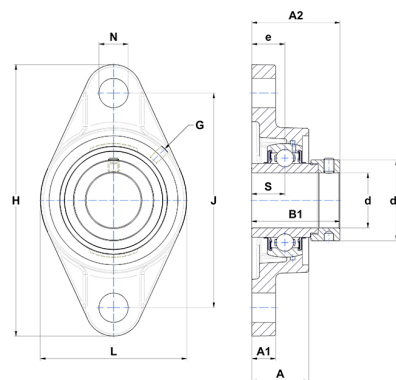

| Product performance |          |
|---------------------|----------|
| C                   | 19.50 kN |
| C0                  | 11.20 kN |
| T min.              | -20 °C   |
| T max.              | 100 °C   |

| Other features                              |         |
|---------------------------------------------|---------|
| Weight                                      | 1.01 kg |
| Recommended tightening torque for set screw | 5.50 Nm |
| Designation of housing                      | FL206N  |
| Designation of bearing                      | EX206G2 |