

PDF technical sheet


7915UCG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	75 mm
D	105 mm
B	16 mm
d1	85.30 mm
d2	83 mm
D1	94.70 mm
D2	99.30 mm
a	20.10 mm
Contact angle, α	15 °
rs min	1 mm
r1s min	0.60 mm
f0	16.5
Precision class	P42
Mass	0.36 kg
Brand	NTN

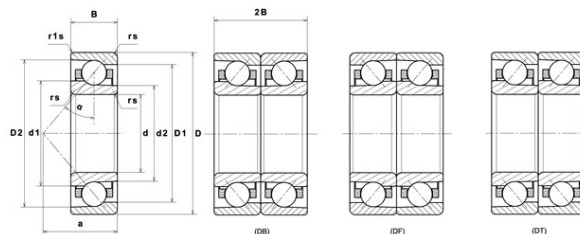

Product performance	
Dynamic load, C	30 kN
Static load, C0	31.50 kN
Nlim (oil)	20,800 Tr/min
Nlim (grease)	13,000 Tr/min
Preload level	GN
Peload value	177 kN
axial rigidity	85.7 N/ μ m
radial rigidity	490 N/ μ m
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	10.22 Hz
Characteristic outer ring frequency, BPF0	11.78 Hz
Characteristic inner ring frequency, BPF1	14.22 Hz

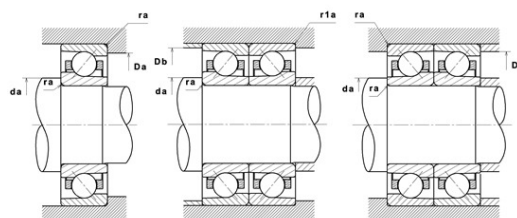

Abutment dimensions

da min	80.50 mm
Da max	99.50 mm
Db max	100.50 mm
r1a max	0.60 mm
ra max	1 mm
D6	85.90 mm

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68	1	0	0.41	0.87	1	0.92	0.67	1.41
	30°		0.8								0.78

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$