



PDF technical sheet EXFLE208



Bearing units

grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger, for low-temp. applications

Product definition	
B	42.80 mm
A	37.50 mm
A1	13 mm
A2	42.40 mm
B1	56.30 mm
d	40 mm
d1	56.50 mm
e	21 mm
G	R1/8"
H	172 mm
H	172 mm
J	143.50 mm
L	105 mm
N	14 mm
s1	39.70 mm
S	21.40 mm

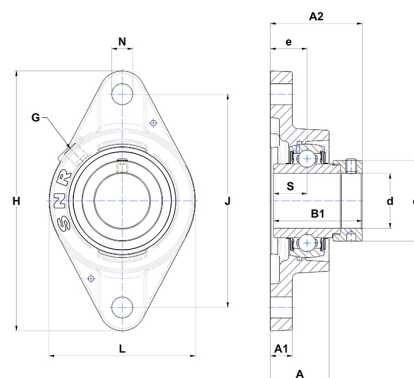

Product performance	
C	29.60 kN
C0	18.20 kN
T min.	-20 °C
T max.	100 °C

Other features	
Weight	1.78 kg
Recommended tightening torque for set screw	11.50 Nm
Designation of housing	FLE208
Designation of bearing	EX208G2