

Product Data Sheet



Product Code:

Issue No.

Issue Date:

Issue by:

31006/2 - 31063/2

C

17.01.11

D.B.P

Description


Triple Pole MCBs Type B 10kA

General Characteristics

Standards	BSEN60898
Current ratings (In)	6, 10, 16, 20, 32, 40, 50 & 63A
Voltage rating (Ue)	230/400Va.c.
Frequency	50 - 60Hz
Type	B (3-5xIn)
Enclosure material	Flame Retardent PA
Colour	Light Grey - RAL7035
IP Rating	IP20
Cable Entry Facility	Box Terminals
No of Modules	3
No. of Poles	3
Short Circuit rating (kA)	10kA (*)
Terminal capacity (In)	25mm ²
Terminal capacity (Out)	25mm ²
Busbar connectivity	upto 2mm thick forked copper busbar
Terminal Tightening Torque	2 - 2.5Nm
Calibration Temperature	30C
Operating temperature	-5C to +55C



Dimensions

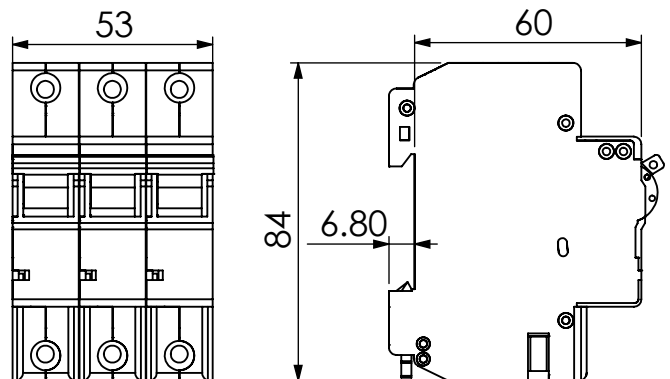

Product coding

3	10	XX	/2
---	----	----	----

No. of Poles	kA	In	Type
3	10	06	B
	* 50A and 63A rated 6kA	10	
		16	
		20	
		32	
		40	
		50	
		63	

Earth Fault Loop Impedance (Zs max at 240V)

(In)	Max Zs (@0.4sec)	Max Zs (@5sec)
6	8.00	8.89
10	4.80	5.33
16	3.00	3.33
20	2.40	2.67
32	1.50	1.67
40	1.20	1.33
50	0.96	1.07
63	0.76	0.85

