



FAG


NU252-E-TB-M1

Cylindrical roller bearing

Schaeffler ID:
0785733600000

Cylindrical roller bearing NU20..-E-XL-M1, with cage, single row, non-locating bearing, 2 ribs on outer ring, 0 ribs on inner ring (smooth), type NU, Running accuracy in P6

Technical information

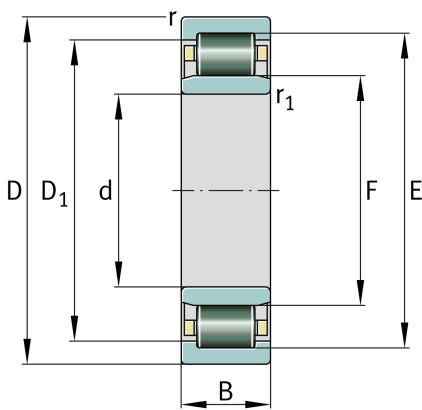

Main Dimensions & Performance Data

d	260 mm	Bore diameter
D	480 mm	Outside diameter
B	80 mm	Width
C _r	1.350.000 N	Basic dynamic load rating, radial
C _{0r}	1.890.000 N	Basic static load rating, radial
C _{ur}	142.000 N	Fatigue load limit, radial
n _G	2.100 1/min	Limiting speed
n _{gr}	1.110 1/min	Reference speed
≈m	66,73 kg	Weight

Mounting dimensions

d _{a min}	280 mm	Minimum diameter shaft shoulder
d _{a max}	314 mm	Maximum diameter of shaft shoulder
d _{b min}	320 mm	Minimum shaft shoulder
D _{a max}	460 mm	Maximum diameter of housing shoulder
r _{a max}	4 mm	Maximum recess radius
r _{a1 max}	4 mm	Maximum recess radius

Dimensions

r _{min}	5 mm	Minimum chamfer dimension
r _{1 min}	5 mm	Minimum chamfer dimension
s	6,2 mm	Axial displacement
E	429 mm	Raceway diameter outer ring
F	317 mm	Raceway diameter inner ring
D _{1 min}	406,6 mm	Minimum rib diameter outer ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.