


threaded fittings

3601 male connector — tube to UNF, BSPP or metric




nickel-plated brass
with "O" ring seal




internal hexagon

ØD in	C UNF		F1 mm	F2 mm	H in	K in	
5/32	10-32	3601 04 20	10	2.5	.61	.43	.21
1/4	10-32	3601 56 20	13	2.5	.75	.55	.35
mm BSPP/metric	metric		mm	mm	mm	mm	ΔkgΔ
4	M5x0.8	3601 04 19	10	2.5	15.5	11	.006
4	G1/8	3601 04 10	13	3	14.5	14	.010
4	M6x1	3601 04 52	10	3	16	11	.010
4	G1/4	3601 04 13	16	3	14.5	17.5	.018
4	M8x1	3601 04 56	11	3	14.5	12	.010
6	M5x0.8	3601 06 19	13	2.5	19	14	.010
6	G1/8	3601 06 10	13	4	17.5	14	.013
6	M10x1	3601 06 60	13	4	17.5	14	.013
6	G1/4	3601 06 13	16	4	17	17.5	.019
8	G1/8	3601 08 10	15	5	20	16	.016
8	G1/4	3601 08 13	16	6	18	17.5	.020
8	G3/8	3601 08 17	20	6	19	22	.029
10	G1/4	3601 10 13	18	7	25	19.5	.030
10	G3/8	3601 10 17	20	8	22.5	22	.033
10	G1/2	3601 10 21	24	8	22.5	26	.045
12	G1/4	3601 12 13	20	7	27	22	.040
12	G3/8	3601 12 17	20	9	26	22	.041
12	G1/2	3601 12 21	24	10	23.5	26	.052
14	G3/8	3601 14 17	22	9	28	24	.047
14	G1/2	3601 14 21	24	11	26.5	26	.052

3681 male connector — metric tube to M5

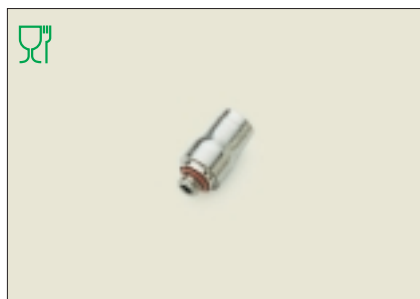

nickel-plated brass
with "O" ring seal



internal hexagon


ØD mm	C M5		F mm	G mm	H mm	
4	M5x0.8	3681 04 19	2.5	10	16	.005

 = suitable for food applications

3614 female connector — metric tube to BSPP or M5



nickel-plated brass




ØD mm	C BSPP/metric		F mm	H mm	K mm	
4	M5x0.8	3614 04 19	10	22	11	.010
4	G1/8	3614 04 10	14	25	15	.017
4	G1/4	3614 04 13	17	29	18.5	.027
6	G1/8	3614 06 10	14	27.5	15	.018
6	G1/4	3614 06 13	17	31.5	18.5	.029
8	G1/8	3614 08 10	15	28.5	16	.023
8	G1/4	3614 08 13	17	32.5	18.5	.030
10	G3/8	3614 10 17	22	38	24	.056
12	G3/8	3614 12 17	22	39	24	.060
12	G1/2	3614 12 21	24	43.5	26	.068

3631 male standpipe — metric tube to BSPP or M5



nickel-plated brass
with 'O' ring seal



ØD mm	C BSPP/metric		F mm	H mm	H1 mm	K mm	
4	M5x0.8	3631 04 19	13	25.5	7	14	0.003
4	G1/8	3631 04 10	16	26.5	7	17.5	0.007
4	G1/4	3631 04 13	8	25	7.5	8.7	0.011
6	G1/8	3631 06 10	13	28	6.5	14	0.008
6	G1/4	3631 06 13	16	29	6.5	17.5	0.012
8	G1/8	3631 08 10	13	28.5	6.5	14	0.009
8	G1/4	3631 08 13	16	29.5	6.5	17.5	0.013
8	G3/8	3631 08 17	20	30.5	7.5	22	0.021
10	G1/4	3631 10 13	16	34.5	6.5	17.5	0.017
10	G3/8	3631 10 17	20	35.5	7.5	22	0.023
10	G1/2	3631 10 21	24	37	7.5	26	0.029
12	G3/8	3631 12 17	20	36.5	7.5	22	0.021
12	G1/2	3631 12 21	24	38	7.5	26	0.031
14	G1/2	3631 14 21	24	40	8	26	0.031