



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number JL724348 - JL724314, Tapered Roller Bearings - TS (Tapered Single) Metric

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

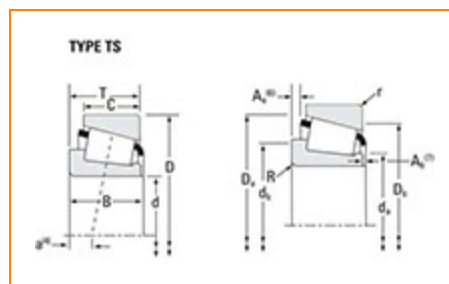

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	L724300
Cone Part Number	JL724348
Cup Part Number	JL724314
Design Unit	Metric
Cage Material	Stamped Steel
Full Timken Part Number	L724300

Dimensions



1 - Bore

120 mm

4.7244 in

D - Cup Outer Diameter	170 mm 6.6929 in
B - Cone Width	25.4 mm 1 in
C - Cup Width	19.050 mm 0.7500 in
T - Bearing Width	25.400 mm 1.0000 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	3.3 mm 0.13 in
r - Cup Backface "To Clear" Radius²	3.3 mm 0.13 in
da - Cone Frontface Backing Diameter	127 mm 5 in
db - Cone Backface Backing Diameter	132.0 mm 5.20 in
Da - Cup Frontface Backing Diameter	163.10 mm 6.46 in
Db - Cup Backface Backing Diameter	155.96 mm 6.14 in
Ab - Cage-Cone Frontface Clearance	2 mm 0.08 in
Aa - Cage-Cone Backface Clearance	2 mm 0.08 in
a - Effective Center Location³	7.9 mm 0.31 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	37600 N 8450 lbf
C1 - Dynamic Radial Rating (1 million revolutions)⁵	145000 N 32600 lbf
C0 - Static Radial Rating	231000 N 52000 lbf
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	29500 N 6640 lbf

Factors

K - Factor⁷	1.27
e - ISO Factor⁸	0.46
Y - ISO Factor⁹	1.31
G1 - Heat Generation Factor (Roller-Raceway)	170
G2 - Heat Generation Factor (Rib-Roller End)	70.6
Cg - Geometry Factor¹⁰	0.147

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.


⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a_3 .

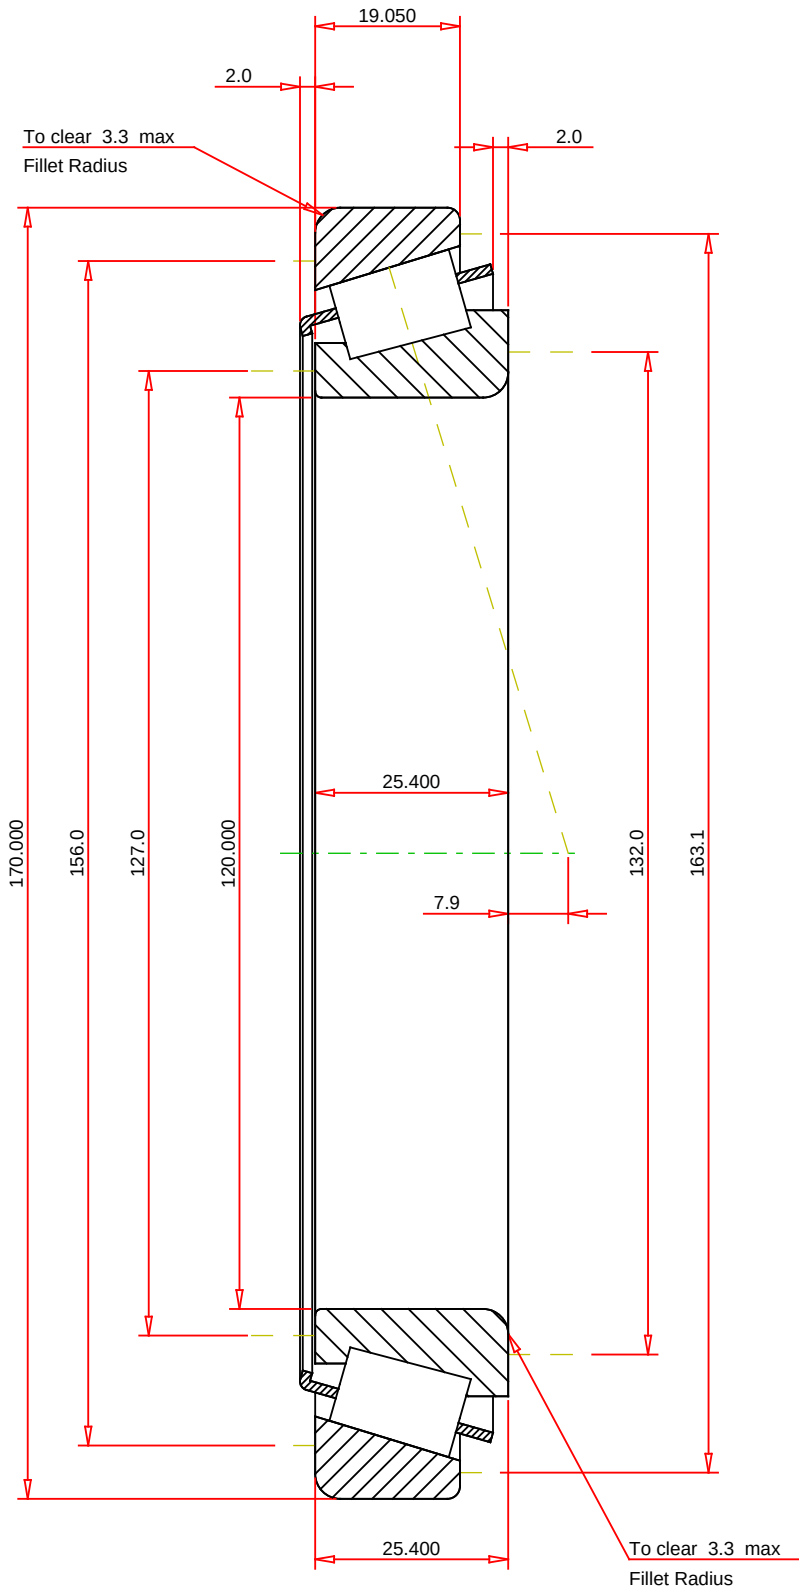

METRIC UNITS

ISO Factor - e	0.46
ISO Factor - Y	1.31
Bearing Weight	1.6 kg
Number of Rollers Per Row	33
Effective Center Location	7.9 mm

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

JL724348 - JL724314
Tapered Roller Bearings - TS (Tapered Single)
Metric

K Factor	1.27	
Dynamic Radial Rating - C90	37600	N
Dynamic Thrust Rating - Ca90	29500	N
Static Radial Rating - C0	231000	N
Dynamic Radial Rating - C1	145000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY