


Self-Lube® cast iron pillow block units

NP Series

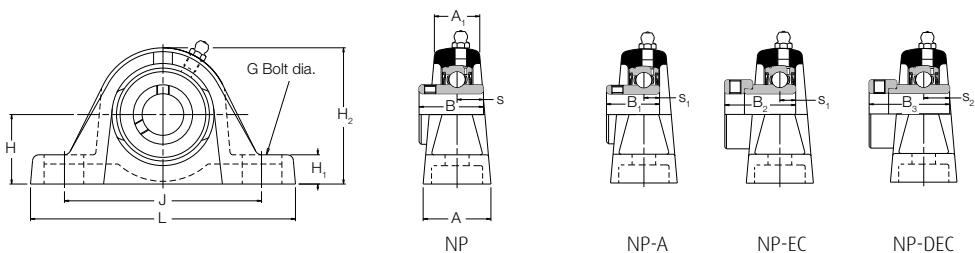


Shaft diameter		RHP designation				Basic bearing insert	Casting group	Dimensions (mm)				Bolt centres	
mm	inches							L	H	H ₁	H ₂	J _{max}	J _{min}
12		NP12A		NP12EC		1017	1	126.5	30.20	14.2	57.2	100.5	85.5
15		NP15A		NP15EC									
16		NP16		NP16EC									
17		NP17A		NP17EC									
	½	NP½		NP½EC									
	¾	NP¾A		NP¾EC									
20		NP20	NP20A	NP20EC	NP20DEC	1020	2	127.0	33.30	14.0	65.2	100.5	88.5
	¾	NP¾	NP¾A	NP¾EC	NP¾DEC								
25		NP25	NP25A	NP25EC	NP25DEC	1025	3	139.0	36.50	16.0	71.0	112.7	96.8
	¾	NP¾		NP¾EC	NP¾DEC								
	⅞	NP⅞		NP⅞EC	NP⅞DEC								
	1⅝	NP1⅝		NP1⅝EC	NP1⅝DEC								
30	1	NP1	NP1A	NP1EC	NP1DEC								
		NP30	NP30A	NP30EC	NP30DEC	1030	4	160.5	42.90	17.7	82.7	129.5	108.5
	1⅝	NP1⅝		NP1⅝EC	NP1⅝DEC								
	1⅜	NP1⅜		NP1⅜EC	NP1⅜DEC								
	1¼	NP1¼R	NP1¼AR	NP1¼ECR	NP1¼DECR								
35		NP35	NP35A	NP35EC	NP35DEC	1035	5	166.0	47.60	17.5	93.0	136.5	121.5
	1¼	NP1¼	NP1¼A	NP1¼EC	NP1¼DEC								
	1⅝	NP1⅝		NP1⅝EC	NP1⅝DEC								
	1⅞	NP1⅞		NP1⅞EC	NP1⅞DEC								
40		NP40	NP40A	NP40EC	NP40DEC	1040	6	180.5	49.20	18.5	98.5	148.0	127.0
	1½	NP1½	NP1½A	NP1½EC	NP1½DEC								
45		NP45	NP45A	NP45EC	NP45DEC	1045	7	190.5	54.00	20.0	108.0	154.5	140.5
	1⅝	NP1⅝		NP1⅝EC	NP1⅝DEC								
	1⅞	NP1⅞		NP1⅞EC	NP1⅞DEC								
	1¾	NP1¾	NP1¾A	NP1¾EC	NP1¾DEC								
50		NP50	NP50A	NP50EC	NP50DEC	1050	8	206.0	57.20	21.0	115.2	163.0	154.0
	1⅝	NP1⅝		NP1⅝EC	NP1⅝DEC								
	1⅞	NP1⅞		NP1⅞EC	NP1⅞DEC								
	2	NP2R		NP2DEC	NP2DEC								
55		NP55		NP55DEC	NP55DEC	1055	9	219.5	63.50	24.8	129.5	178.5	162.5
	2	NP2		NP2DEC	NP2DEC								
	2⅝	NP2⅝		NP2⅝DEC	NP2⅝DEC								
	2⅜	NP2⅜		NP2⅜DEC	NP2⅜DEC								
60		NP60		NP60DEC	NP60DEC	1060	10	240.0	69.90	26.3	142.3	201.0	176.0
	2¼	NP2¼		NP2¼DEC	NP2¼DEC								
	2⅝	NP2⅝		NP2⅝DEC	NP2⅝DEC								
	2⅞	NP2⅞		NP2⅞DEC	NP2⅞DEC								

Please check availability

Bearing inserts with flinger seals shown on pages 89 and 90 can be fitted into these housings. The unit reference has the suffix 'FS', e.g. NP40FS.

Triple seal bearing inserts shown on pages 86 to 88 can be fitted into these housings. The unit reference has a prefix 'T', e.g. TNP25.

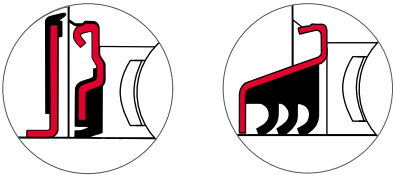

Dimensions (mm)										ISO Load ratings		Rec. max. speed	Mass (approx.)
G	A	A ₁	B	B ₁	B ₂	B ₃	s	s ₁	s ₂	dynamic C _r newtons	static C _{0r} newtons	rev/min	kg
10	30.5	20.5	27.38	-	28.63	-	11.58	6.53	-	9550	4800	7000	0.5
10	32.5	22.5	31.00	25.80	31.03	43.73	12.73	7.53	17.13	12800	6650	6700	0.6
10	36.5	24.5	34.10	27.30	31.03	44.43	14.33	7.53	17.53	14000	7880	6250	0.7
12	41.5	27.5	38.10	31.20	35.73	48.43	15.93	9.03	18.33	19500	11300	5300	1.3
12	44.5	30.5	42.90	34.90	38.93	51.13	17.53	9.53	18.83	25700	15300	4500	1.7
12	51.0	34.5	49.20	41.20	43.73	56.33	19.03	11.03	21.43	32500	19900	4000	2.1
12	54.0	36.0	49.20	41.20	43.73	56.33	19.04	11.04	21.44	32500	20500	3700	2.8
16	55.0	36.0	51.60	43.50	43.73	62.73	19.04	11.04	24.64	35000	23200	3400	3.2
16	60.0	39.5	55.60	-	-	71.42	22.24	-	27.84	43500	29200	3100	4.0
16	70.0	46.0	65.10	-	-	77.84	25.44	-	31.04	48000	33000	2800	5.9