



Speed Controller: Standard Type Elbow Type (Metal Body) **Series AS**

Dimensions: AS1400-M3

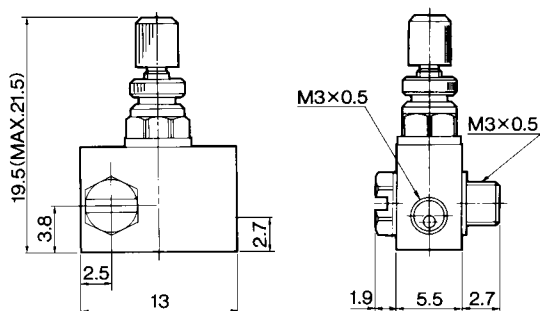


Dimensions: AS-1200-M3, AS12□0-M5, AS22□0, 32□0, 42□0

AS1200-M3
AS12□0-M5
AS12□0-U10/32

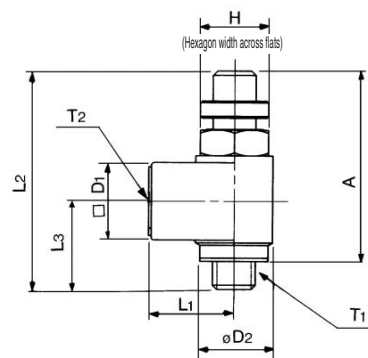

AS22□0, 32□0, 42□0

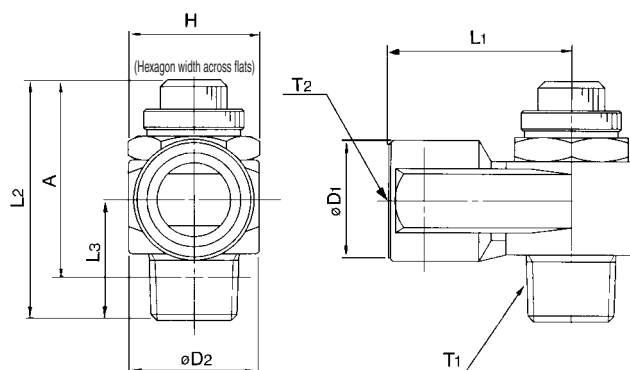

Dimensions

Model	T1	T2	H ⁽¹⁾	L1	L2		L3	D1	D2	A ⁽²⁾	
					Max.	Min.				Max.	Min.
AS1200-M3	M3 x 0.5	M3 x 0.5	4.5	6.6	23.5	21.5	8	5	5	20.5	18.5
AS1200-M5	M5 x 0.8	M5 x 0.8	8	10	28.3	25.5	10.3	9	9	25	22.2
AS1200-U10/32	10-32 UNF	10-32 UNF									
AS22□0-01	1/8	1/8	12 (12.7)	18	36.4	31.4	14.1	14.3	14.6	32.4	27.4
AS22□0-02	1/4	1/4	17 (17.5)	27.2	40.8	35.8	18	18	19.5	34.8	29.8
AS32□0-03	3/8	3/8	19	30	46.9	41.9	20.8	22.5	24.3	40.6	35.6
AS42□0-04	1/2	1/2	24 (23.8)	38.5	55.6	50.6	26.7	27.5	28.5	47.4	42.4

Note 1) () are the dimensions of "NPT" thread.

Note 2) Reference thread dimensions after installation.

AS

ASP

ASN

AQ

ASV

AK

ASS

ASR

ASF