



Part number

PE 1643 PP



Brief description:

surface mounting housings, sockets, 2 poles + PE, 16 (A.C.), 100 ÷ 130V, 4 yellow, IP44

Product description		Approvals / Standards	
Model	sockets	Reference standard	EN 60309-1 and -2
Version	PLUSO, plugs and socket-outlets	Quality mark	 , EAC
Series	PE...PP	General ordering information	
Product type	wall-mounting	EAN13 code	8015747063753
Family	plugs and socket-outlets	Packaging Information	
N. of poles	2 poles + 	Packaging length	208,00 mm
Clock position	4	Packaging height	140,00 mm
Technical data		Packaging width	290,00 mm
Current	16 A (A.C.)	Packaging weight	2,00 kg
Voltage	100 ÷ 130 V	Packaging volume	8,44 dm³
Frequency	50 and 60 Hz.	Packaging description	Carton box
Operating temperature range (min, max)	-40°C ... +125°C	Packaging quantity	10 Pcs
Material	thermoplastic	Packaging EAN code	8015747063760
IP degree of protection	IP44		
Further technical details			
Weight	180,00 g		


Part number

PE 1643 PP



Catalogue drawings

(16 / 32A) PE ... PP

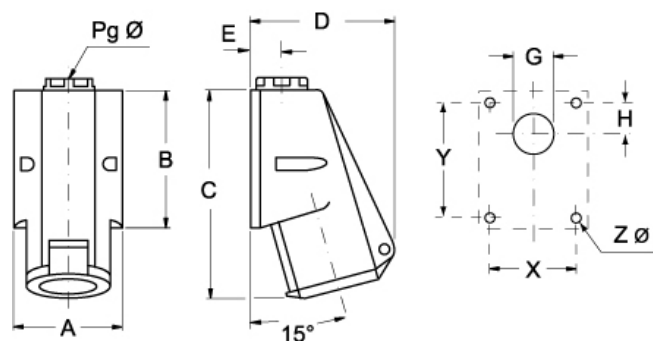

PE ... PP		A	B	C	D	E	G	H	X	Y	Pg	Ø Z Ø
16A	2P+⊕	70	82	126	92	20	Ø22	16	53	65	16	4,5
	3P+⊕	70	82	126	92	20	Ø22	16	53	65	16	4,5
	3P+N+⊕	70	82	126	99	13	Ø22	16	53	65	16	4,5
32A	2P+⊕	86	104	159	110	24	Ø28	17	61	79	21	6,5
	3P+⊕	86	104	159	110	24	Ø28	17	61	79	21	6,5
	3P+N+⊕	86	104	159	110	24	Ø28	17	61	79	21	6,5

Notes

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- PE...PP types (IP44), spring lid, entry with threaded grommet (replaceable with a cable gland)
- PEW...PP types (IP67), spring lid with locking ring and gasket, entry with cable gland
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- 125A: with terminal block for the anchoring of incoming cables, already connected to socket
- IP44 and IP67 degrees of protection (EN 60529)