


Products · Mounting

Hydraulic mounting and dismounting

Connectors, accessories

FAG high pressure pipes for high pressure pumps, sheathed in PVC hose (max. permissible pressure of 2 500 bar should be monitored by manometer)

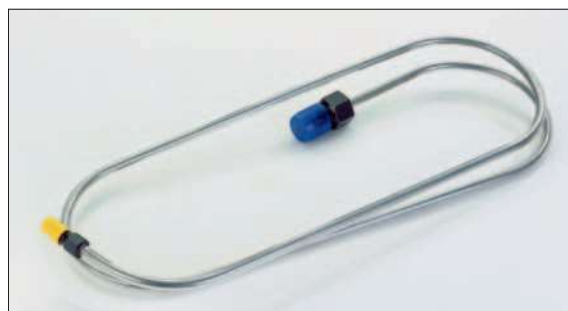

FAG high pressure pipe

High pressure pipe	Connector	Mass ≈ kg
--------------------	-----------	-----------------

Ordering designation

PUMP.PIPE-G$\frac{1}{4}$	G $\frac{1}{4}$	0,6
PUMP.PIPE-G$\frac{3}{8}$	G $\frac{3}{8}$	0,6
PUMP.PIPE-G$\frac{1}{2}$	G $\frac{1}{2}$	0,6
PUMP.PIPE-G$\frac{3}{4}$	G $\frac{3}{4}$	0,8

The connector for the pump holder is G $\frac{3}{4}$.

For other connectors, a suitable reduction nipple must be used in addition.

For detailed information, see TPI WL 80-50.

FAG sleeve connectors for adapter and extraction sleeves (up to 800 bar)

(special lengths available by agreement)



FAG sleeve connectors

Connector	Threaded connector	Mass ≈ kg
-----------	--------------------	-----------------

Ordering designation

PUMP.SLEEVE-CONNECTOR-M6	M6	0,22
PUMP.SLEEVE-CONNECTOR-M8	M8	0,245
PUMP.SLEEVE-CONNECTOR-G$\frac{1}{8}$	G $\frac{1}{8}$	0,285
PUMP.SLEEVE-CONNECTOR-G$\frac{1}{4}$	G $\frac{1}{4}$	0,42

The connector for the hand pump set is G $\frac{1}{4}$.

For detailed information, see TPI WL 80-50.