Related Products: Multi-holder

Series TMA

- Can be used to secure the KE□ series exhaust valve with One-touch fitting.
- One-touch fitting can also be secured.

Union tee: KQT, Elbow: KQL, Straight: KQH

 Depending on the number of holders required, they can be separated as desired. (Align the cutter with the cutting groove and cut the holder.)




Specifications

Ambient temperature	−20 to 60°C
Material	Flame resistant polypropylene (Equivalent to UL-94 standard V-0)
Color	Black

Model

Model Stati	Stations	Applicable exhaust valve	Applicable One-touch fitting			
	Stations		Union tee	Union elbow	Straight union	
TMA-06	8	KEA06	KQT06-00	KQL06-00	KQH06-00	
		KEB06	KQ100-00	KQL06-00	KQHU6-UU	
TMA-08	8	KEA08		KQL08-00	KQH08-00	
		KEB08	KQT08-00			
		KEC-02				
TMA-10	6	KEA10	KQT10-00	KQL10-00	KQH10-00	
		KEB10	KQTT0-00	NQL10-00	NQHIU-00	
TMA-12	6	KEA12		KQL12-00	KQH12-00	
		KEB12	KQT12-00			
		KEC-03				

Dimensions: Multi-holder

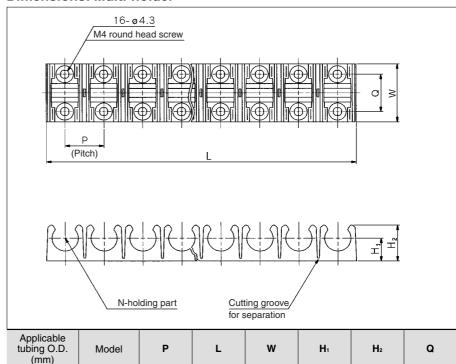

Applicable tubing O.D. (mm)	Model	Р	L	w	H ₁	H ₂	Q
6	TMA-06	19	151	28	11.4	17.9	18.6
8	TMA-08	21.7	172.5	31.8	12.6	20.3	18.6
10	TMA-10	25.4	151.2	35	15	24.3	22
12	TMA-12	28.1	167.3	37	16.2	26.7	22