

SGS[®]

Solid Carbide Tools

An ISO 9002 Certified Company

Metric Standard Catalog

50

Serving Industry
for over 50 years


--MAIN--

--INDEX--



www.sgstool.com

Your Edge in Productivity

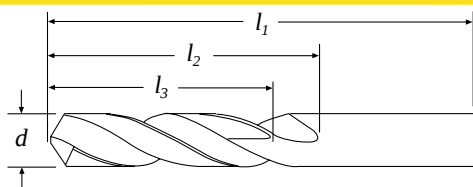

--MAIN--

--INDEX--

ød mm h7	l ₁ mm	l ₂ mm	l ₃ mm	EDP No.	Ti-NAMITE EDP No.	Ti-NAMITE-C EDP No.	Ti-NAMITE-A EDP No.
4,0	55	22	17	62091	60959	68550	68688
4,1	55	22	17	62093	60960	68551	68689
4,2	55	22	17	62095	60961	68552	68690
4,3	58	24	18	62097	60962	68553	68691
4,4	58	24	18	62099	60963	68554	68692
4,5	58	24	18	62101	60964	68555	68693
4,6	58	24	18	62103	60965	68556	68694
4,7	58	24	18	62105	60966	68557	68695
4,8	62	26	20	62107	60967	68558	68696
4,9	62	26	20	62109	60968	68559	68697
5,0	62	26	20	62111	60969	68560	68698
5,1	62	26	20	62113	60970	68561	68699
5,2	62	26	20	62115	60971	68562	68700
5,3	62	26	20	62117	60972	68563	68701
5,4	66	28	21	62119	60973	68564	68702
5,5	66	28	21	62121	60974	68565	68703
5,6	66	28	21	62123	60975	68566	68704
5,7	66	28	21	62125	60976	68567	68705
5,8	66	28	21	62127	60977	68568	68706
5,9	66	28	21	62129	60978	68569	68707
6,0	66	28	21	62131	60979	68570	68708
6,1	70	31	23	62133	60980	68571	68709
6,2	70	31	23	62135	60981	68572	68710
6,3	70	31	23	62137	60982	68573	68711
6,4	70	31	23	62139	60983	68574	68712
6,5	70	31	23	62141	60984	68575	68713
7,0	74	34	25	62143	60985	68580	68718
7,5	74	34	25	62145	60986	68585	68723
8,0	79	37	27	62147	60987	68590	68728
8,5	79	37	27	62149	60988	68595	68733
9,0	84	40	29	62151	60989	68600	68738
9,5	84	40	29	62153	60990	68605	68743
10,0	89	43	31	62155	60991	68610	68748
10,5	89	43	31	62066	60992	68615	68753
11,0	95	47	33	62157	60993	68620	68758
11,5	95	47	33	62084	60994	68625	68763
12,0	102	51	35	62159	60995	68630	68768
12,5	102	51	35	62102	60996	68635	68773
13	102	51	35	62112	60997	68640	68778
14	107	54	37	62116	60998	68642	68780



DIN 6539 - Short Length Drills

Micrograin Solid Carbide

Short Length, 118° Four Facet Point,
27° Spiral



Brocas DIN 6539 serie corta

Metal duro con micrograno

Longitud corta, punta de cuatro caras y 118°,
hélice a derecha (27°)



Forets courts - DIN 6539

Carbure monobloc, micrograin

Court - Angle d'entrée à quatre facettes, 118°
- Hélice à droite, 27°



Brocas de série curta DIN 6539

Metal duro microgrão

Série curta, broca com ponta de quatro facetas,
afiação/ângulo a 118°, espiral de 27° à direita



Punte con lunghezza extra corta DIN 6539

Micrograna

Punte - Serie extra corta - Angolo di testa 118° con
affilatura autocentrante sulla testa. Elica destra a 27°



Bohrer DIN 6539

Vollhartmetall, Feinstkorn

Kurze Ausführung, Vier-Facetten-Anschliff 118°,
27° Drall

4

d TOLERANCES h7

Ø mm	mm
≤ 3	= +0,000-0,010
>3 - 6	= +0,000-0,012
>6 - 10	= +0,000-0,015
>10 - 18	= +0,000-0,018
>18 - 30	= +0,000-0,021

TECHNICAL

