





Vyna-Plush

The perfect low-cost doormat to scrape dirt and wipe moisture


- Budget doormat offering all-round performance to prevent slips and trips.
- 100% polypropylene fibres provide effective 'scraping' surface.
- Slip and stain-resistant PVC backing to keep your mat securely in place.
- Available in rolls for larger entrance areas.
- Range of bright colours available, to match interior theming.

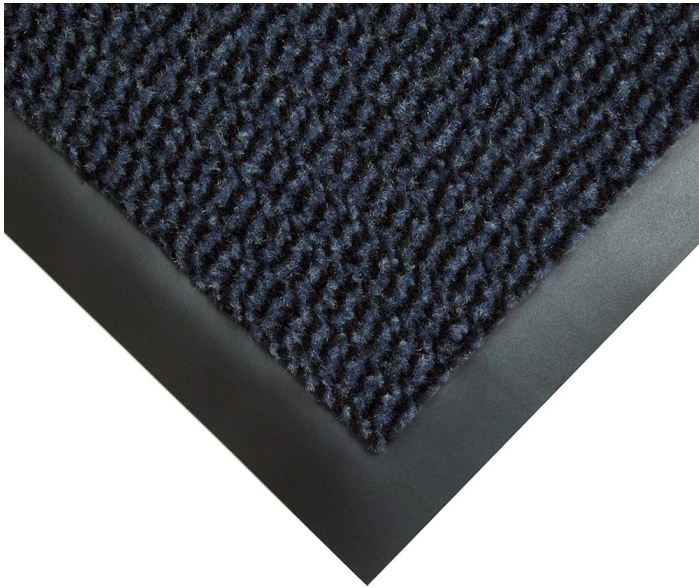

Styles Available



Black/Red



Black/Steel



Black/Brown



Black/Blue

Parts

Part Number	Size	Colour	Weight
VP010201	0.6 m x 0.9 m	Black/Blue	1.60 kg
VP010301	0.6 m x 0.9 m	Black/Red	1.60 kg
VP010501	0.6 m x 0.9 m	Black/Brown	1.60 kg
VP010601	0.6 m x 0.9 m	Black/Steel	1.60 kg
VP010204	0.9 m x 1.2 m	Black/Blue	2.85 kg
VP010304	0.9 m x 1.2 m	Black/Red	2.85 kg

Technical Specification

Material	PP
Backing	Vinyl
Surface Finish	Cutpile
Product Height	7 mm
Product Weight	2.9kg/ m2 (tolerance 100g/ m2)
Roll Length	25lm
Pile Height	5 mm
Absorbency	0.6l/ m2
Pile Yarn Composition	100% PP
Pile Weight	0.43kg/ m2
Operating Temperature	-10°C to +50°C
Resistance to Chemicals	Good

Parts

VP010504	0.9 m x 1.2 m	Black/Brown	2.85 kg
VP010604	0.9 m x 1.2 m	Black/Steel	2.85 kg
VP010202	0.9 m x 1.5 m	Black/Blue	3.80 kg
VP010302	0.9 m x 1.5 m	Black/Red	3.80 kg
VP010502	0.9 m x 1.5 m	Black/Brown	3.80 kg
VP010602	0.9 m x 1.5 m	Black/Steel	3.80 kg
VP010203	1.2 m x 1.8 m	Black/Blue	6.05 kg
VP010303	1.2 m x 1.8 m	Black/Red	6.05 kg
VP010503	1.2 m x 1.8 m	Black/Brown	6.05 kg
VP010603	1.2 m x 1.8 m	Black/Steel	6.05 kg
VP010207C	0.9 m x per linear metre (max. 25 m)	Black/Blue	2.60 kg
VP010307C	0.9 m x per linear metre (max. 25 m)	Black/Red	2.60 kg
VP010507C	0.9 m x per linear metre (max. 25 m)	Black/Brown	2.60 kg
VP010607C	0.9 m x per linear metre (max. 25 m)	Black/Steel	2.60 kg
VP010208C	1.2 m x per linear metre (max. 25 m)	Black/Blue	3.43 kg
VP010308C	1.2 m x per linear metre (max. 25 m)	Black/Red	3.43 kg
VP010508C	1.2 m x per linear metre (max. 25 m)	Black/Brown	3.43 kg
VP010608C	1.2 m x per linear metre (max. 25 m)	Black/Steel	3.43 kg

Technical Specification

Environmental Resistance	Suitable for indoor environments only
Typical Applications	Entrance areas
Installation Method	Loose lay
Cleaning Method	Vacuum top surface
Country of Origin	Belgium
Coating Thickness	2 mm
Tuft density	63,000/ m2
Manufacturing process	Tufting 5/32'