

3-Colour Display Digital Flow Switch for Large Flow




IP65



Applicable fluid **Air, N₂**

Flow ratio ^{*2} **100:1** A wide range of flow measurement is possible with 1 product.

*2 The flow ratio is 20 : 1 for the existing model (PF2A7□H/Large flow type).

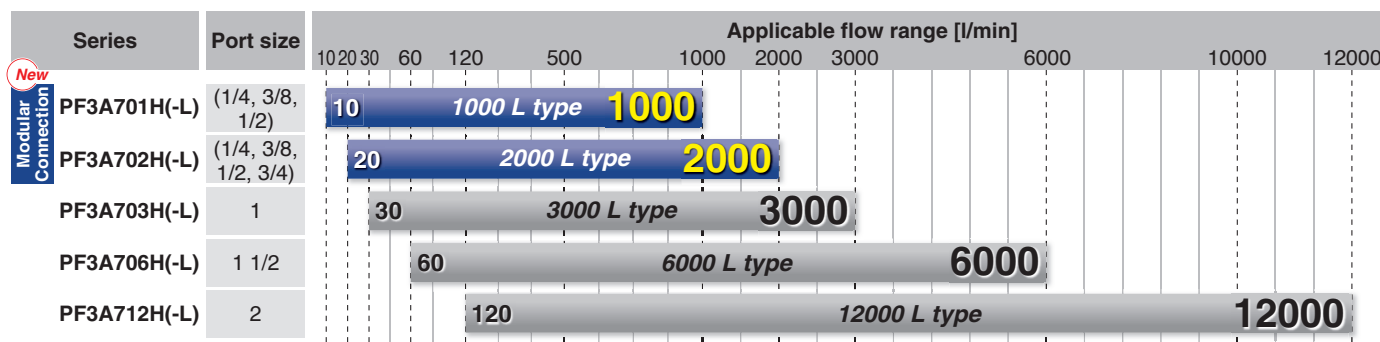

* The port sizes in () are for when a piping adapter (sold separately) is connected

New IO-Link Compatible

The flow rate value and the device status can be figured out easily via the process data. **p. 3**

Diagnosis items	Over current error, Rated/Accumulated flow error, Flow/Temperature sensor failure, Internal product malfunction
-----------------	---

**3-Screen Display
Digital Flow Monitor**

Allows for the monitoring of remote lines **p. 5**



Improved resistance to moisture and foreign matter

The bypass construction reduces sensor accuracy deterioration and damage. **p. 1**

New The modular type has been added.
Can be connected to the air combination **p. 4**




PF3A7□H(-L) Series



CAT.EUS100-117C-UK

Improved resistance to moisture and foreign matter

The bypass construction reduces the moist air or foreign matter in contact with the sensor, reducing sensor accuracy deterioration and damage.

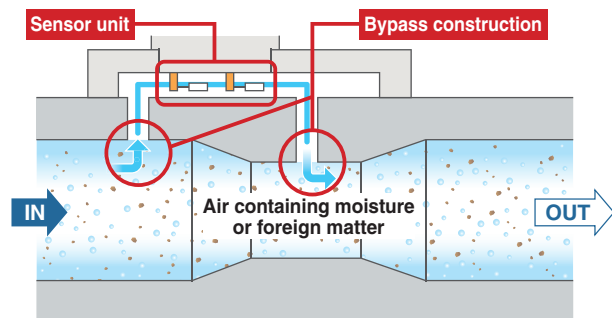

* The figure shows the PF3A703/6/12H(-L).

Through bore construction

- Pressure loss: **75 % reduction** ^{*2}
(20 kPa → 5 kPa)
- Maintenance-free fluid passage

*1 Excludes the modular type

*2 Compared with the existing model (PF2A7□H/ Large flow type)



3-colour/2-screen display

* 2-screen display: 2-row display of main screen and sub screen

Upper Main display: **Green** At set point

Upper Main display: **Red** At set point


Instantaneous flow rate **Green** **Red** (Upper Main display)



Set value **Orange** (Lower Sub display)

The lower/sub display can be changed by pressing the up/down buttons.

* Either "Input of line name" or "Display OFF" can be added via the function settings.



Display rotates 90° and can be reversed.


Clockwise **90°** Easy operation, improved visibility

The display can be rotated in increments of 90° according to the installation. The display can be reversed for easy operation.




Installation Example

Reversed display OFF

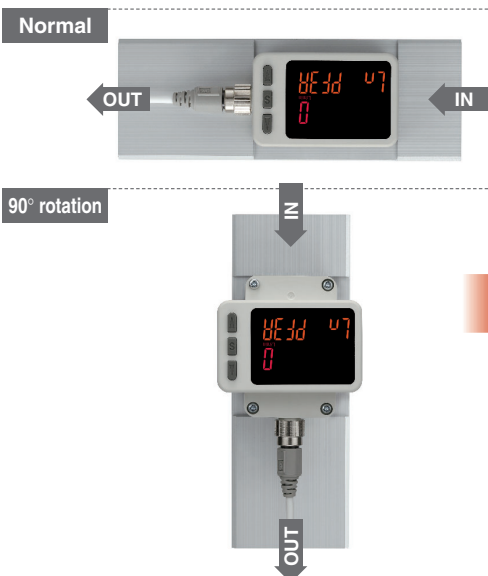

Reversed display ON (Can be set with the "Reversible display mode")

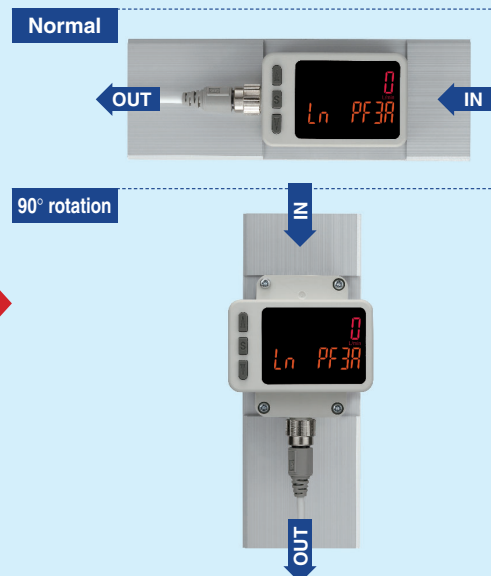

Smallest settable increment: 2 l/min

- * For the PF3A703H
- * 5 l/min for the existing model (PF2A703H/Large flow type)


Functions p. 33, 34

- Output operation
- Simple setting mode
- Display colour
- Reference condition
- Response time
- FUNC output switching function (Analogue output ⇔ External input)
- Selectable analogue output function
- External input function
- Forced output function
- Accumulated value hold
- Peak/Bottom value display
- Display OFF mode
- Setting of security code
- Key-lock function
- Reset to the default settings
- Reversible display mode
- Zero cut-off function
- Selection of display on sub screen
- Analogue output free range function
- Error display function

Grease-free

Application

Flow control of equipment, main line, and branch line

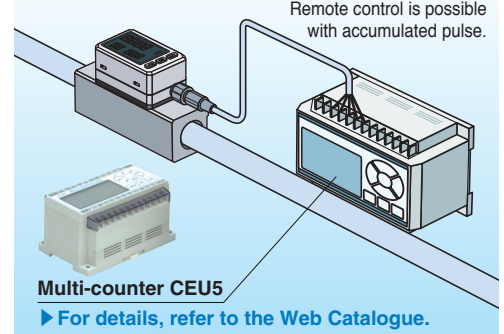

Select a digital flow switch to increase energy savings!

Flow control is necessary for promoting energy saving in any application. Saving energy starts from numerical control of the flow consumption of equipment and lines and clarification of the purpose and effect.

- Digital display allows visualisation.
- 3-colour/2-screen display, Improved visibility
- Remote control is possible with accumulated pulse.

Energy Saving Program

For details, refer to the SMC website.

<https://www.smc.eu>

SMC Model Selection Software


Search

Energy Saving Program

Allows you to perform various calculations necessary to improve the pneumatic energy saving.

This software is the download version. After downloading the software, install it into your personal computer.

Download the program
Ver.4.1.02 2017/01/23 Update
How to Install

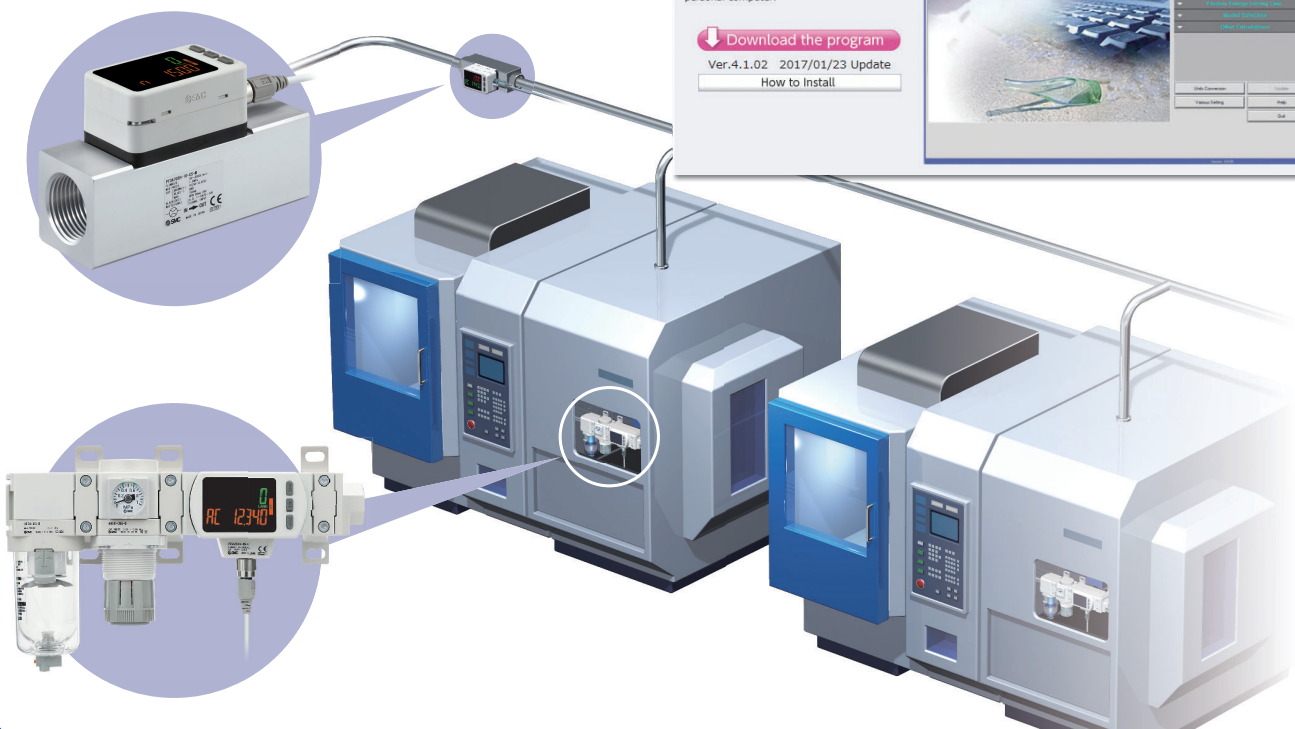


IO-Link Compatible PF3A7□H-□□-L□-□□

p. 13

Supports the IO-Link communication protocol



IO-Link is an open communication interface technology between the sensor/actuator and the I/O terminal that is an international standard: IEC 61131-9.

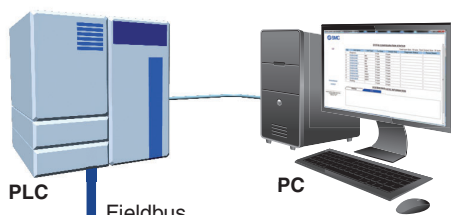

Configuration File (IODD File)*1

· Manufacturer · Product part no. · Set value

*1 IODD File:
IODD is an abbreviation of IO Device Description. This file is necessary for setting the device and connecting it to a master. Save the IODD file on the PC to be used to set the device prior to use.

Device settings can be set by the master.

- Threshold value
- Operation mode, etc.

Read the device data.

- Switch ON/OFF signal and analogue value
- Device information:
Manufacturer, Product part number, Serial number, etc.
- Normal or abnormal device status
- Cable breakage

IO-Link Master



IO-Link Compatible Device:
Digital Flow Switch for Large Air Flow

Implement diagnostic bits in the process data.

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.
It is possible to find problems with the equipment in real time using the cyclic (periodic) data and to monitor such problems in detail with the noncyclic (aperiodic) data.


Process Data

Bit offset	Item	Note	Diagnosis items
0	OUT1 output	0: OFF 1: ON	· Over current error
1	OUT2 output	0: OFF 1: ON	· Rated flow error
8	Flow rate diagnosis	0: OFF 1: ON	· Accumulated flow error
14	Fixed output	0: OFF 1: ON	· Flow sensor failure
15	Error (Failure)	0: OFF 1: ON	· Temperature sensor failure
16 to 31	Measured flow rate value	Signed 16 bit	· Internal product malfunction

Bit offset	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Item	Measured flow rate value (PD)															


Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Error (Failure)	Fixed output	Reservation				Flow rate diagnosis		Reservation				OUT2		OUT1	
													Switch output			

Application Example

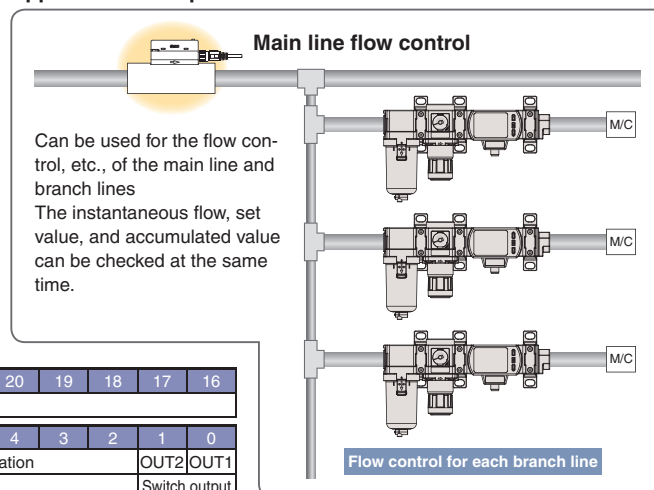

Display function

Displays the output communication status and indicates the presence of communication data

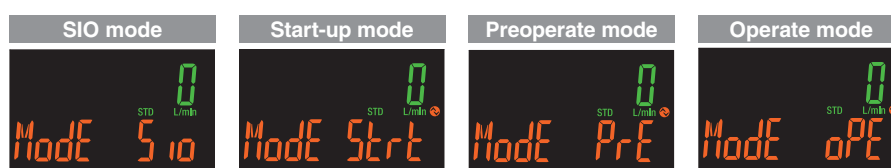

Operation and Display

Communication with master	IO-Link status indicator light	Status	Screen display*2	Description
Yes		Normal	Operate	Normal communication status (readout of measured value)
			Start up	At the start of communication
			Preoperate	
No	 (Flashing)	Abnormal	Version does not match	The IO-Link version does not match that of the master. * The applicable IO-Link version is 1.1.
			Communication disconnection	Normal communication was not received for 1 s or longer.
	OFF	SIO mode		General switch output

*1 In IO-Link mode, the IO-Link indicator is ON or flashing. *2 When the lower line (sub screen) is set to mode display

* "ModE LoC" is displayed when the data storage lock is enabled. (Except for when the version does not match or when in SIO mode)

3-Colour Display Modular Type Digital Flow Switch PF3A701H/702H(-L) Series

p. 15, 17

Can be connected to the air combination


Series	AC30-D	AC40-D	Flow range
PF3A701H(-L)	●		1000 l/min
PF3A702H(-L)		●	2000 l/min




Air Combination Connection Examples

Products do not come assembled.
They should be ordered separately and assembled by the customer.

For the AC30B-D + PF3A701H

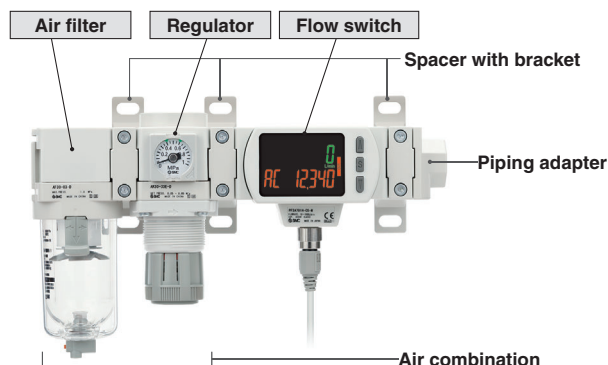

For the AW30-D + PF3A701H

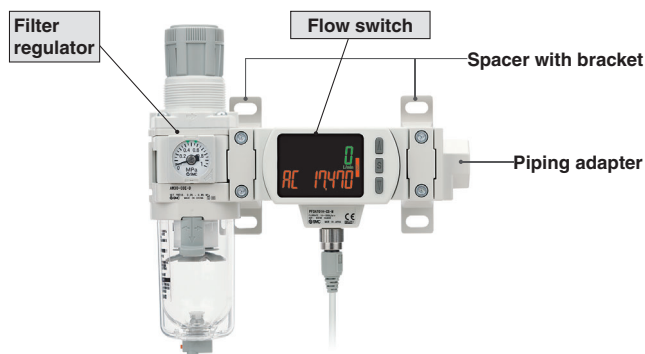

Simple Specials System

Unit with F.R.L is available with the simple special ordering system.
The lead time is almost the same as the standard product.

Please contact your local sales representative for more details.

A right to left (-R) flow direction is also available.





90° rotation




The flow switch can be installed/removed without removing the piping.

Reduced maintenance time for inspection, cleaning, replacement, etc.

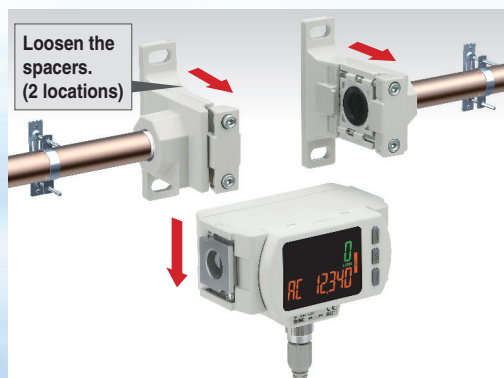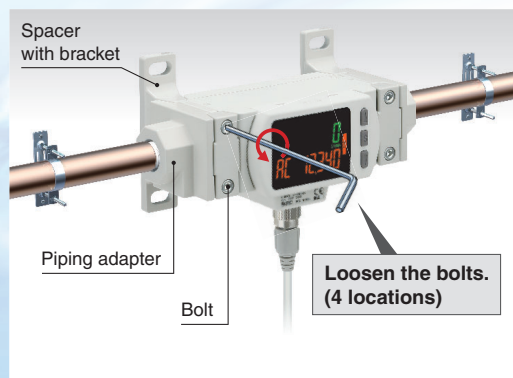

When the PF3A703H is used with steel pipes




3-Screen Display Digital Flow Monitor

PFG300 Series p. 27




Allows for the monitoring of remote lines

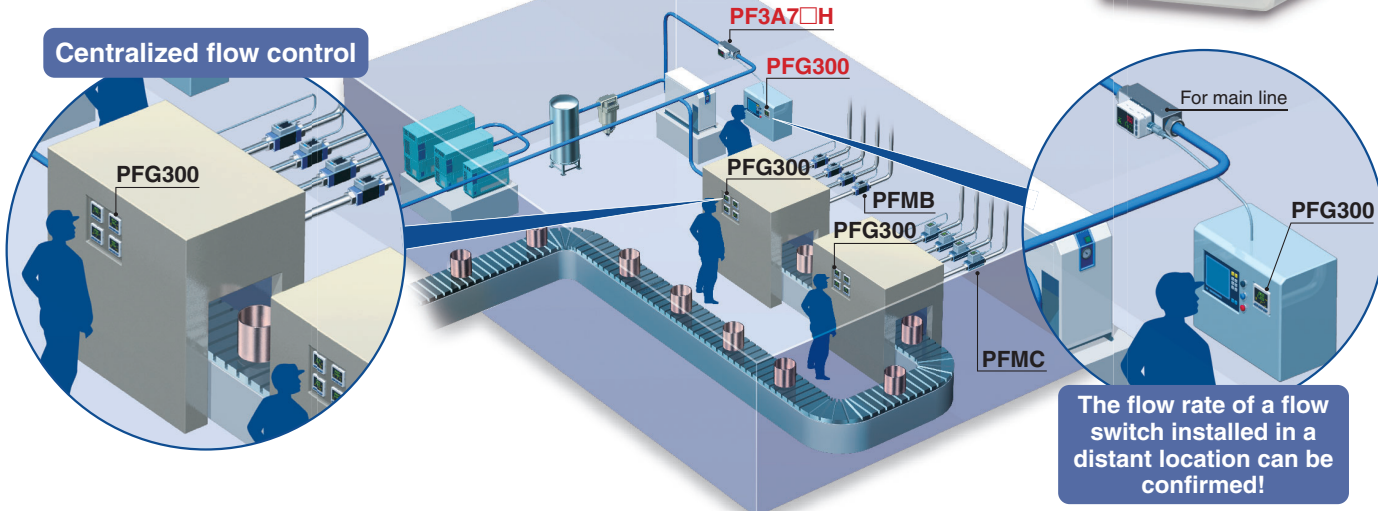

Visualisation of settings


The sub screen (label) shows the item to be set.

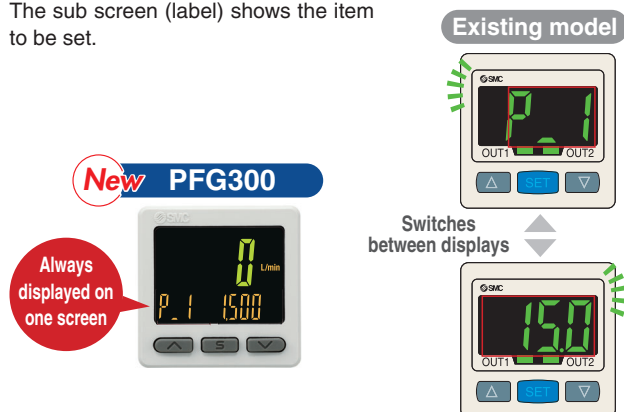


Mode Examples	Hysteresis mode					
	Normal output	Set value (Threshold value)	Reversed output	Set value (Threshold value)	Hysteresis	Set hysteresis value
	P.1	1500	n.1	1500	H.1	150
	Window comparator mode					
	Normal output/Lo side	Set value (Threshold value)	Normal output/Hi side	Set value (Threshold value)		
	P.L	900	P.H	1800		
	Reversed output/Lo side	Set value (Threshold value)	Reversed output/Hi side	Set value (Threshold value)		
	n.L	900	n.H	1800		

Easy screen switching

It is possible to change the settings while checking the measured value.

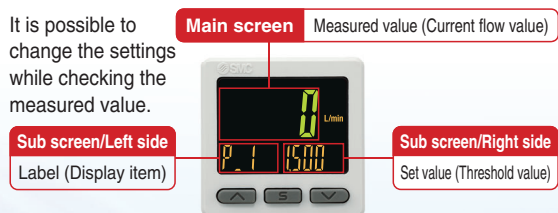


The sub screen can be switched by pressing the up/down buttons.

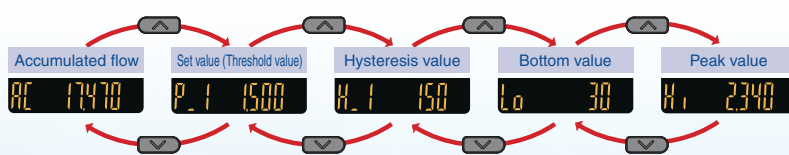

* Either "Input of line name" or "Display OFF" can be added via the function settings.

Simple 3-step setting


When the S button is pressed and the set value (P_1) is being displayed, the set value (threshold value) can be set. When the S button is pressed and the hysteresis (H_1) is being displayed, the hysteresis value can be set.

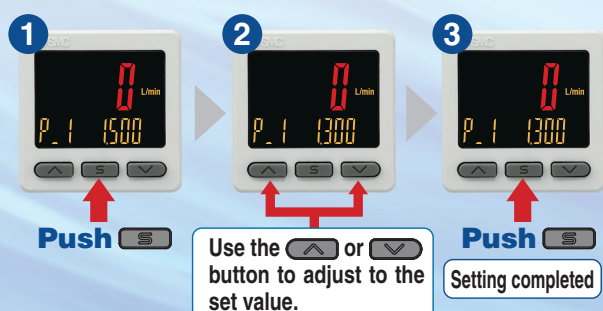

With a snap shot function for set value reading


Pressing the **▲** and **▼** buttons simultaneously for a minimum of 1 second will make the set value (threshold value) the same as the current flow value.

Snap shot function

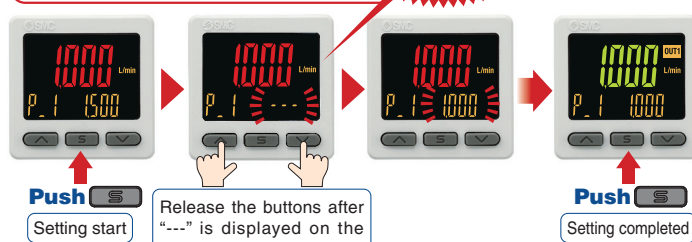


NPN/PNP switch function

The number of stock items can be reduced.

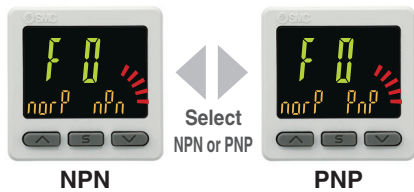

Input range selection (for Pressure/Flow rate)



The displayed value to the sensor input can be set as required.
(Voltage input: 1 to 5 V/Current input: 4 to 20 mA)


Pressure switch/Flow switch can be displayed.

A is displayed for 1 V (or 4 mA). B is displayed for 5 V (or 20 mA).
The range can be set as required.

Analogue output of 0 to 10 V is also available.

Voltage output	1 to 5 V	Switchable
	0 to 10 V	
Current output	4 to 20 mA	Fixed

■ Pressure Sensor for General Fluids/PSE570




	A	B
PSE570	0	1000
PSE573	-100	100
PSE574	0	500

Set A and B to the values shown in the table above.

Convenient functions

● Copy function

The settings of the master monitor can be copied to the slave monitors.

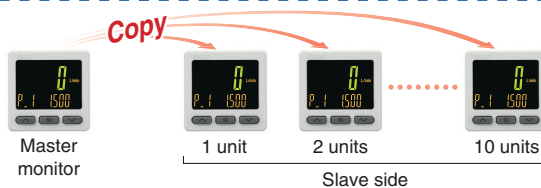

● Security code

The key locking function keeps unauthorized persons from tampering with the settings.

● Power saving mode

Power consumption is reduced by turning off the monitor.

Current consumption*1	Reduction rate*2
25 mA or less	Approx. 50 % reduction

*1 During normal operation *2 In power saving mode


● External input function

The accumulated value, peak value, and bottom value can be reset remotely.

Compact & Lightweight

● Compact: Max. 6 mm shorter

● Lightweight: Max. 5 g lighter (30 g → 25 g)

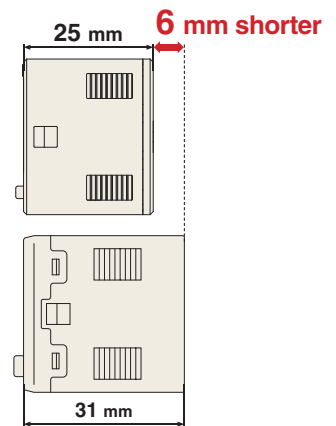


Functions p. 35 to 37

- Output operation
- Simple setting mode
- Display colour
- Delay time setting
- Digital filter setting
- FUNC output switching function
- Selectable analogue output function
- External input function
- Forced output function
- Accumulated value hold
- Peak/Bottom value display
- Setting of security code
- Key-lock function
- Reset to the default settings
- Display with zero cut-off setting
- Selection of display on sub screen
- Analogue output free range function
- Error display function
- Copy function
- Selection of power saving mode

Mounting


The bracket configuration allows for mounting in four orientations.

Bracket A

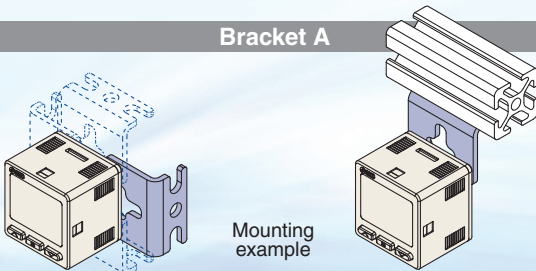

Mounting example

Bracket B

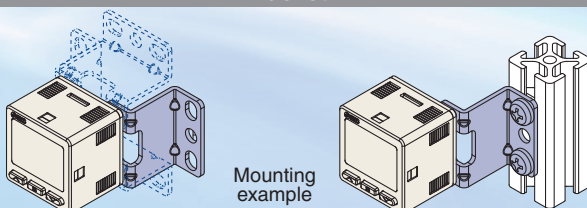


Mounting example

Panel mounting

Mountable side by side both vertically and horizontally

One opening!

- Reduced panel fitting labour
- Space saving

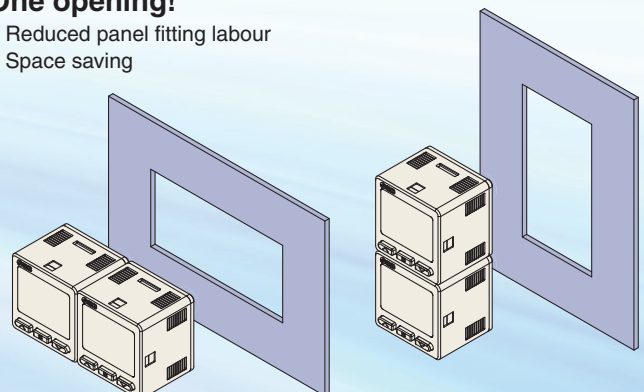

Flow Switch Flow Rate Variations

Series		Applicable fluid	Detection method	Smallest settable increment	Rated flow range [l/min]																					
	Compatibility with the PFG300 digital flow monitor				0.1	0.2	0.5	1	2	5	10	20	25	50	100	150	200	300	500	600	1000	2000	3000	6000	12000	
PF2A 	—	Air N ₂	Thermal type (Thermistor)	0.1 l/min				1																		
				0.5 l/min					5																	
				1 l/min						10																
				2 l/min							20															
				5 l/min								50														
PF3A7□H(-L)  Large flow type p. 11, 13  PFG300 p. 27  Modular type p. 15, 17	—	Air N ₂	Thermal type (Platinum sensor)	2 l/min																			3000			
				5 l/min																					6000	
				10 l/min																					12000	
			Bypass flow type	1 l/min																						1000
				2 l/min																						2000
PF2M7(-L) 	—	Dry air N ₂ Ar CO ₂	Thermal type (MEMS)	0.001 l/min	0.01																					
					0.02																					
				0.01 l/min	0.05																					
					0.1																					
					0.3																					
				0.1 l/min	0.5																					
PFMB   PFG300	—	Dry air N ₂	Thermal type (MEMS) Bypass flow type																							
				1 l/min																						
PFMC(-L)   PFG300	—	Dry air N ₂	Thermal type (MEMS) Bypass flow type																							
				1 l/min																						

Series	Applicable fluid	Detection method	Rated flow range [l/min]									
			-3	-2	-1	-0.5	0	0.5	1	2	3	
PFMV 	Dry air N ₂	Thermal type (MEMS)						0	0.5			
								0	1			
								0			3	
						-0.5		0.5				
					-1			1				
			-3									3

Flow Switch Variations / Basic Performance Table

Series	 PFMV PFMV3	 PF2M7(-L)	 PFMB PFG300	 PFMC(-L) PFG300	 PF2A	 PF3A7□H(-L) p. 11 PFG300 p. 27
Enclosure	IP40	IP40	IP40	IP65 [Monitor unit: IP40]	IP65	IP65 [Monitor unit: IP40]
Fluid	Dry air, N ₂	Dry air, N ₂ , Ar, CO ₂	Dry air, N ₂	Dry air, N ₂	Air, N ₂	Air, N ₂
Setting	Digital	Digital	Digital	Digital	Digital	Digital
Rated flow range [l/min]	0 to 0.5 -0.5 to 0.5 0 to 1 -1 to 1 0 to 3 -3 to 3	0.01 to 1 0.02 to 2 0.05 to 5 0.1 to 10 0.3 to 25 0.5 to 50 1 to 100	2 to 200 5 to 500 10 to 1000 20 to 2000	5 to 500 10 to 1000 20 to 2000	1 to 10 5 to 50 10 to 100 20 to 200 50 to 500	30 to 3000 10 to 1000 60 to 6000 20 to 2000 120 to 12000
Power supply voltage	12 to 24 VDC ±10 %	PF2M7 12 to 24 VDC ±10 % PF2M7-L 18 to 30 VDC ±10 %	12 to 24 VDC ±10 %	PFMC 12 to 24 VDC ±10 % PFMC-L 18 to 30 VDC ±10 %	12 to 24 VDC ±10 %	PF3A7□H 24 VDC ±10 % PF3A7□H-L 18 to 30 VDC ±10 % PF3A701H/ 21.6 to 30 VDC PF3A702H-L
Temperature characteristics (25 °C standard)	±2 % F.S. (15 to 35 °C) [Monitor unit: ±0.5 % F.S. (0 to 50 °C)] ±5 % F.S. (0 to 50 °C)	±3 % F.S. ±1 digit (15 to 35 °C) ±5 % F.S. ±1 digit (0 to 50 °C)	±2 % F.S. (15 to 35 °C) [Monitor unit: ±0.5 % F.S. (0 to 50 °C)] ±5 % F.S. (0 to 50 °C)	±2 % F.S. (15 to 35 °C) [Monitor unit: ±0.5 % F.S. (0 to 50 °C)] ±5 % F.S. (0 to 50 °C)	±3 % F.S. (15 to 35 °C) ±5 % F.S. (0 to 50 °C)	±5 % F.S. [Monitor unit: (0 to 50 °C) ±0.5 % F.S. (0 to 50 °C)]
Repeatability	±2 % F.S. (Fluid: Dry air) [Monitor unit: ±0.1 % F.S. Analogue output: ±5 % F.S.] Analogue output: ±5 % F.S.	±1 % F.S. ±1 digit (Fluid: Dry air)	±1 % F.S. [Monitor unit: (Fluid: Dry air) ±0.1 % F.S.]	±1 % F.S. [Monitor unit: (Fluid: Dry air) ±0.1 % F.S.]	±1 % F.S. (PF2A7□0) ±2 % F.S. (PF2A7□1)	±1 % F.S. [Monitor unit: ±0.1 % F.S.]
Hysteresis	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Fixed (3 digits)	Hysteresis mode: Variable Window comparator mode: Variable
Output	NPN/PNP open collector Analogue voltage output Analogue current output	NPN/PNP open collector Accumulated pulse output Analogue voltage output Analogue current output IO-Link	NPN/PNP open collector Accumulated pulse output Analogue voltage output Analogue current output	NPN/PNP open collector Accumulated pulse output Analogue voltage output Analogue current output IO-Link	NPN/PNP open collector Accumulated pulse output	NPN/PNP open collector Accumulated pulse output Analogue voltage output Analogue current output IO-Link
Display	[Monitor unit: 2-colour LCD display]	2-colour LCD display	2-colour LED/2-colour LCD display 2-colour LCD display [Monitor unit: 3-colour LCD display]	3-colour LCD display	LED display	3-colour LCD display

* The monitor unit values are for the PFG300 and PFMV3.

CONTENTS

3-Colour Display	Large Flow Type	Digital Flow Switch <i>PF3A7□H Series</i>
3-Colour Display	IO-Link Compatible	
	Large Flow Type	Digital Flow Switch <i>PF3A7□H-L Series</i>
3-Colour Display	Modular Type	Digital Flow Switch <i>PF3A7□H Series</i>
3-Colour Display	IO-Link Compatible	
	Modular Type	Digital Flow Switch <i>PF3A7□H-L Series</i>
3-Screen Display		Digital Flow Monitor <i>PFG300 Series</i>



3-Colour Display	Large Flow Type	Digital Flow Switch <i>PF3A7□H Series</i>	
		How to Order	p. 11
		Specifications	p. 12
3-Colour Display	IO-Link Compatible		
	Large Flow Type	Digital Flow Switch <i>PF3A7□H-L Series</i>	
		How to Order	p. 13
		Specifications	p. 14
3-Colour Display	Modular Type	Digital Flow Switch <i>PF3A7□H Series</i>	
		How to Order	p. 15
		Specifications	p. 16
3-Colour Display	IO-Link Compatible		
	Modular Type	Digital Flow Switch <i>PF3A7□H-L Series</i>	
		How to Order	p. 17
		Specifications	p. 18
		Flow Range	p. 19
		Analogue Output	p. 19
		Pressure Loss	p. 20
		Flow Rate Characteristics	p. 20
		IN Side Straight Section and Accuracy	p. 21
		Internal Circuits and Wiring Examples	p. 22
		Construction: Parts in Contact with Fluid	p. 24
		Dimensions	p. 24
		Optional Accessories	p. 26
3-Screen Display		Digital Flow Monitor <i>PFG300 Series</i>	
		How to Order	p. 27
		Specifications	p. 28
		Internal Circuits and Wiring Examples	p. 29
		Dimensions	p. 30
		PF3A7□H(-L)/Function Details	p. 33
		PFG300/Function Details	p. 35
		Safety Instructions	Back cover


3-Colour Display

Large Flow Type Digital Flow Switch

PF3A7□H Series



RoHS

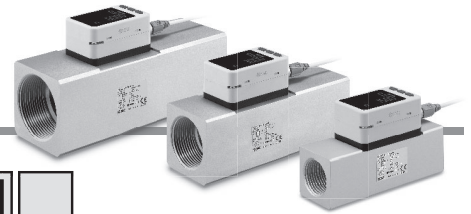

How to Order

PF3A 7 03 H - 10 - CS - M

Type

7	Integrated display
---	--------------------

Rated flow range

03	30 to 3000 l/min
06	60 to 6000 l/min
12	120 to 12000 l/min

Large flow type

Thread type

—	Rc
N	NPT
F*1	G

*1 ISO 1179-1 compliant

Port size

Symbol	Port size	Rated flow range		
		03	06	12
10	1	●	—	—
14	1 1/2	—	●	—
20	2	—	—	●

Calibration certificate*7

—	None
A	Yes

*7 The certificate is in both English and Japanese.

Unit specification

—	Units selection function
M	SI units only*6

*6 Fixed units: Instantaneous flow: l/min
Accumulated flow: L

Options

—	With lead wire with M12 connector (3 m)*5
N	Without lead wire with M12 connector

*5 Options are shipped together with the product but do not come assembled.

Output specification

Symbol	OUT	FUNC*2	Applicable monitor unit model
CS	NPN	Analogue voltage output*3 ⇔ External input*4	PFG300 series
DS	NPN	Analogue current output ⇔ External input*4	PFG310 series
ES	PNP	Analogue voltage output*3 ⇔ External input*4	PFG300 series
FS	PNP	Analogue current output ⇔ External input*4	PFG310 series

*2 Analogue output or external input can be selected by pressing the buttons. Analogue output is set as default setting.

*3 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.

*4 The accumulated value, peak value, and bottom value can be reset.

Option/Part No.

When only optional parts are required, order with the part number listed below.

Part no.	Option	Note
ZS-37-A	Lead wire with M12 connector	Length: 3 m

Specifications

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

Model			PF3A703H	PF3A706H	PF3A712H
Fluid	Applicable fluid*1		Air, Nitrogen		
	Fluid temperature		0 to 50 °C		
Flow	Detection method		Thermal type		
	Rated flow range		30 to 3000 l/min	60 to 6000 l/min	120 to 12000 l/min
	Set point range*2	Instantaneous flow	30 to 3150 l/min	60 to 6300 l/min	120 to 12600 l/min
		Accumulated flow	0 to 999,999,999,990 L		
	Smallest settable increment	Instantaneous flow	2 l/min	5 l/min	10 l/min
		Accumulated flow	10 L	100 L	
	Accumulated volume per pulse (Pulse width = 50 ms)		Select from 100 L/pulse or 1000 L/pulse.		
Accumulated value hold function*3		Intervals of 2 or 5 minutes can be selected.			
Pressure	Rated pressure range		0.1 to 1.5 MPa		
	Proof pressure		2.25 MPa		
	Pressure loss		Refer to the “Pressure Loss” graph.		
	Pressure characteristics*4		±2.5 % F.S. (0.1 to 1.0 MPa, 0.5 MPa standard)		
Electrical	Power supply voltage		24 VDC ±10 %		
	Current consumption		150 mA or less		
	Protection		Polarity protection		
Accuracy	Display accuracy		±3.0 % F.S.		
	Analogue output accuracy		±3.0 % F.S.		
	Repeatability		Switch output/Display: ±1.0 % F.S. Analogue output: ±1.0 % F.S.		
	Temperature characteristics		±5.0 % F.S. (Ambient temperature of 0 to 50 °C, 25 °C standard)		
Switch output	Output type		NPN open collector PNP open collector		
	Output mode		Select from Instantaneous output (Hysteresis mode or Window comparator mode), Accumulated output, or Accumulated pulse output.		
	Switch operation		Select from Normal or Reversed output.		
	Max. load current		80 mA		
	Max. applied voltage (NPN only)		28 VDC		
	Internal voltage drop (Residual voltage)		NPN output type: 1 V or less (at load current of 80 mA) PNP output type: 2 V or less (at load current of 80 mA)		
	Response time*5		Select from 1 s, 2 s, or 5 s.		
Analogue output*7	Hysteresis*6		Variable from 0		
	Protection		Over current protection		
	Output type		Voltage output: 1 to 5 V (0 to 10 V can be selected*8), Current output: 4 to 20 mA		
	Impedance	Voltage output	Output impedance: Approx. 1 kΩ		
		Current output	Maximum load impedance: Approx. 600 Ω		
External input*10	Response time*9		Linked to the response time of the switch output		
	Input type		No-voltage input: 0.4 V or less		
	Input mode		Select from Accumulated value external reset or Peak/Bottom value reset.		
	Input time		30 ms or longer		
Display	Reference condition*11		Select from Standard conditions or Normal conditions.		
	Unit*12	Instantaneous flow	l/min, CFM (ft³/min)		
		Accumulated flow	L, ft³		
	Display range*13	Instantaneous flow	0 to 3150 l/min (Flow under 30 l/min is displayed as “0”)	0 to 6300 l/min (Flow under 60 l/min is displayed as “0”)	0 to 12600 l/min (Flow under 120 l/min is displayed as “0”)
		Accumulated flow*14	0 to 999,999,999,990 L		
	Minimum display unit	Instantaneous flow	2 l/min	5 l/min	10 l/min
		Accumulated flow	10 L	100 L	
Environmental resistance	Display		LCD, 2-screen display (Main screen/Sub screen) Main screen: Red/Green, Sub screen: Orange Main screen: 5 digits, 7 segment, Sub screen: 6 digits, 7 segment		
	Indicator LED		OUT indicator: Red LED is ON when output is ON		
	Enclosure		IP65		
	Withstand voltage		1000 VAC for 1 minute between terminals and housing		
Standards	Insulation resistance		50 MΩ (500 VDC measured via megohmmeter) between terminals and housing		
	Operating temperature range		Operating: 0 to 50 °C, Stored: –10 to 60 °C (No freezing or condensation)		
	Operating humidity range		Operating/Stored: 35 to 85 % RH (No condensation)		
Piping			CE marking (EMC Directive, RoHS Directive)		
Piping specification		Rc1, NPT1, G1	Rc1 1/2, NPT1 1/2, G1 1/2	Rc2, NPT2, G2	
Main materials of parts in contact with fluid					
Aluminum alloy, PPS, HNBR [Sensor: Pt, Au, Fe, Lead glass (exempted from the RoHS application), Al2O3]					
Length of lead wire with connector					
3 m					
Weight	Piping specification	Rc	610 g	1190 g	1680 g
		NPT	610 g	1190 g	1680 g
		G	630 g	1220 g	1720 g
	Lead wire with connector		+90 g		

*1 Air quality grade is JIS B 8392-1:2012 [4.6:-] and ISO 8573-1:2010 [4.6:-].

*2 Set point range will change according to the setting of the zero cut-off function.

*3 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum update limit of the memory device is 1.5 million times. If the product is operated 24 hours per day, the product life will be as follows:

· 5 min interval: life is calculated as 5 min x 1.5 million = 7.5 million min = 14.3 years

· 2 min interval: life is calculated as 2 min x 1.5 million = 3 million min = 5.7 years

If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.

*4 When the pressure range is 1.0 to 1.5 MPa, the pressure characteristics will be ±5 % F.S. (standard pressure is 0.5 MPa). Do not release the OUT side piping port of the product to the atmosphere without connecting piping. If the product is used with the piping port released to atmosphere, accuracy may vary.

*5 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the switch output turns ON (or OFF) when set to be 90 % of the rated flow rate

*6 If the flow fluctuates around the set value, the width for setting more than the fluctuating width needs to be set. Otherwise, chattering will occur.

*7 Analogue output or external input can be selected by pressing the buttons. Refer to the graph for analogue output.

*8 When selecting 0 to 10 V, refer to the analogue output graph for the allowable load current.

*9 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analogue output reaches 90 % of the rated flow rate

*10 Analogue output or external input can be selected by pressing the buttons.

*11 The flow rate given in the specifications is the value under standard conditions.

*12 Setting is only possible for models with the units selection function.

*13 Display range will change according to the setting of the zero cut-off function.

*14 The accumulated flow display is the upper 6-digit and lower 6-digit (total of 12 digits) display. When the upper digits are displayed, x 10⁶ lights up.

* Products with tiny scratches, marks, or display colour or brightness variations which do not affect the performance of the product are verified as conforming products.



How to Order

PF3A 7 03 H - 10 - L Q - M

Type

7	Integrated display
----------	--------------------

Rated flow range

03	30 to 3000 l/min
06	60 to 6000 l/min
12	120 to 12000 l/min

Large flow type

Thread type

—	Rc
N	NPT
F*1	G

*1 ISO 1179-1 compliant

Port size

Symbol	Port size	Rated flow range		
		03	06	12
10	1	●	—	—
14	1 1/2	—	●	—
20	2	—	—	●

Calibration certificate*8

—	None
A	Yes

*8 The certificate is in both English and Japanese.

Unit specification

—	Units selection function
M	SI units only*7

*7 Fixed units: Instantaneous flow: l/min
Accumulated flow: L

Options

—	With lead wire with M12 connector (3 m)*5
N	Without lead wire with M12 connector
Q	Lead wire with M12-M12 connector (3 m)*6

*5 Options are shipped together with the product but do not come assembled.

*6 The lead wire has an M 12 (female) connector on one side and an M 1 2 (male) connector on the other side.

Output specification

Symbol	OUT	FUNC*2	Applicable monitor unit model
L	IO-Link: Switch output (N/P)	—	—
L3	IO-Link: Switch output (N/P)	Analogue voltage output*3 ⇔ External input*4	PFG300 series
L4	IO-Link: Switch output (N/P)	Analogue current output ⇔ External input*4	PFG310 series

*2 Analogue output or external input can be selected by pressing the buttons.

Analogue output is set as default setting.

Output symbol "L" cannot be used as the FUNC terminal is not connected.

*3 1 to 5 V or 0 to 10 V can be selected by pressing the button.
The default setting is 1 to 5 V.

*4 The accumulated value, peak value, and bottom value can be reset.

Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
ZS-37-A	Lead wire with M12 connector	Length: 3 m
ZS-49-A	Lead wire with M12-M12 connector	Male/female conversion, Length: 3 m

For flow switch precautions and specific product precautions, refer to the “Operation Manual” on the SMC website.

Specifications

Model			PF3A703H-L	PF3A706H-L	PF3A712H-L
Electrical	Power supply voltage	When used as a switch output device	24 VDC ±10 %		
		When used as an IO-Link device	21.6 to 30 VDC		
Switch output	Output type		Select from NPN or PNP open collector output.		
	Output mode		Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.		
	Max. applied voltage		30 V (NPN output)		
	Internal voltage drop (Residual voltage)		1.5 V or less (at load current of 80 mA)		
	Delay time*1		3.3 ms or less, variable from 0 to 60 s/0.01 s increments		
Analogue output	Response time*2		Linked to the set value of the digital filter		
Display	Display		LCD, 2-screen display (Main screen/Sub screen) Main screen: Red/Green, Sub screen: Orange Main screen/Sub screen: 9 digits (7 segments 7 digits, 11 segments 2 digits)		
	Digital filter*3		Select from 1 s, 2 s, or 5 s.		
Standards			CE marking (EMC Directive, RoHS Directive)		

*1 The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.

*2 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analogue output reaches 90 % of the rated flow rate

*3 The time for the digital filter can be set to the sensor input. The response time indicates when the set value is 90 % in relation to the step input.

Communication Specifications (IO-Link mode)

IO-Link type	Device
IO-Link version	V 1.1
Communication speed	COM2 (38.4 kbps)
Configuration file	IODD file*1
Minimum cycle time	3.3 ms
Process data length	Input data: 4 bytes, Output data: 0 byte
On request data communication	Yes
Data storage function	Yes
Event function	Yes
Vendor ID	131 (0 x 0083)
Device ID*2	PF3A703H--L- : 400 (0 x 0190)
	PF3A703H--L3-: 401 (0 x 0191)
	PF3A703H--L4-: 402 (0 x 0192)
	PF3A706H--L- : 403 (0 x 0193)
	PF3A706H--L3-: 404 (0 x 0194)
	PF3A706H--L4-: 405 (0 x 0195)
	PF3A712H--L- : 406 (0 x 0196)
	PF3A712H--L3-: 407 (0 x 0197)
	PF3A712H--L4-: 408 (0 x 0198)

*1 The configuration file can be downloaded from the SMC website, <https://www.smc.eu>


*2 The device ID differs according to each product type (output specification).

Other specifications that are not listed are the same as those of the standard product. For details, refer to page 12.

3-Colour Display

Modular Type Digital Flow Switch

PF3A7□H Series



How to Order

PF3A 7 01 H - CS □ - M □ - □

Type

7 Integrated display

Rated flow range

Symbol	Rated flow range	Applicable air combination model
01	10 to 1000 l/min	AC30-D
02	20 to 2000 l/min	AC40-D

Large flow type

Output specification

Symbol	OUT	FUNC*1	Applicable monitor unit model
CS	NPN	Analogue voltage output*2 ⇔ External input*3	PFG300 series
DS	NPN	Analogue current output ⇔ External input*3	PFG310 series
ES	PNP	Analogue voltage output*2 ⇔ External input*3	PFG300 series
FS	PNP	Analogue current output ⇔ External input*3	PFG310 series

- *1 Analogue output or external input can be selected by pressing the buttons. Analogue output is set as default setting.
 *2 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.
 *3 The accumulated value, peak value, and bottom value can be reset.

Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
ZS-37-A	Lead wire with M12 connector	Length: 3 m
ZS-49-A	Lead wire with M12-M12 connector	Male/female conversion, Length: 3 m

Flow direction

—	Left to right
R	Right to left

Calibration certificate*7

—	None
A	Yes

*7 The certificate is in both English and Japanese.

Unit specification

—	Units selection function
M	SI units only*6

*6 Fixed units: Instantaneous flow: l/min
Accumulated flow: L

Option*4

—	With lead wire with M12 connector (3 m)
N	Without lead wire with M12 connector
Q	Lead wire with M12-M12 connector (3 m)*5


*4 Options are shipped together with the product but do not come assembled.

*5 The lead wire has an M12 (female) connector on one side and an M12 (male) connector on the other side.

Caution on Mounting

Pipe threads are not provided for this product. If the product is to be used as a single unit, order a spacer (or spacer with bracket) and a piping adapter separately. Refer to page 26 for details on attachments.

Assembly Example

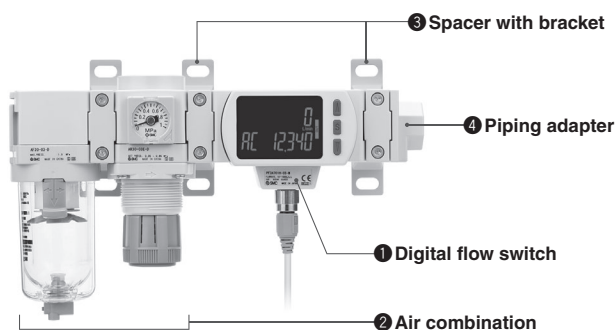

- * Avoid mounting the lubricator on the inlet side.
 * If a pressure relief 3-port valve is installed on the inlet side of the digital flow switch, causing a backflow of air, the measured value will change.

Assembly example

- ① Digital flow switch PF3A701H-CS-M 1 pc.
- ② Air combination AC30B-03E-D 1 pc.
- ③ Spacer with bracket Y300T-D 2 pcs.
- ④ Piping adapter E300-03-D 1 pc.

Products do not come assembled. They should be ordered separately and assembled by the customer.



Simple Specials System

A system designed to respond quickly and easily to your special ordering needs

Please contact your local sales representative for more details.

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

Specifications

Model		PF3A701H	PF3A702H
Fluid	Applicable fluid ^{*1}	Air, Nitrogen	
	Fluid temperature	0 to 50 °C	
Flow	Detection method	Thermal type (Bypass flow type)	
	Rated flow range	10 to 1000 l/min	20 to 2000 l/min
	Set point range ^{*2}	10 to 1050 l/min	20 to 2100 l/min
	Instantaneous flow	0 to 999,999,999,990 L	
	Accumulated flow		
	Smallest settable increment	1 l/min	2 l/min
	Accumulated volume per pulse (Pulse width = 50 ms)	10 L	
	Accumulated value hold function ^{*3}	Intervals of 2 or 5 minutes can be selected.	
Pressure	Rated pressure range	0 to 1.0 MPa	
	Proof pressure	1.5 MPa	
	Pressure loss	Refer to the "Pressure Loss" graph.	
	Pressure characteristics ^{*4}	±5.0 % F.S. (0 to 1.0 MPa, 0.5 MPa standard)	
Electrical	Power supply voltage	24 VDC ±10 %	
	Current consumption	150 mA or less	
	Protection	Polarity protection	
Accuracy	Display accuracy ^{*5}	±3.0 % F.S.	
	Analogue output accuracy ^{*5}	±3.0 % F.S.	
	Repeatability	±1.0 % F.S.	
	Temperature characteristics	±5.0 % F.S. (Ambient temperature of 0 to 50 °C, 25 °C standard)	
	Effects of connecting modular products ^{*6}	±5.0 % F.S.	
Switch output	Output type	NPN open collector, PNP open collector	
	Output mode	Select from Instantaneous output (Hysteresis mode or Window comparator mode), Accumulated output, or Accumulated pulse output.	
	Switch operation	Select from Normal or Reversed output.	
	Max. load current	80 mA	
	Max. applied voltage (NPN only)	28 VDC	
	Internal voltage drop (Residual voltage)	NPN output type: 1 V or less (at load current of 80 mA), PNP output type: 2 V or less (at load current of 80 mA)	
	Response time ^{*7}	Select from 1 s, 2 s, or 5 s.	
	Hysteresis ^{*8}	Variable from 0	
	Protection	Over current protection	
Analogue output ^{*9}	Output type	Voltage output: 1 to 5 V (0 to 10 V can be selected ^{*10}), Current output: 4 to 20 mA	
	Impedance	Output impedance: Approx. 1 kΩ	
	Voltage output	Maximum load impedance: 600 Ω, Minimum load impedance: 50 Ω	
	Current output	Linked to the response time of the switch output	
External input ^{*12}	Response time ^{*11}		
	Input type	No-voltage input: 0.4 V or less	
	Input mode	Select from Accumulated value external reset or Peak/Bottom value reset.	
	Input time	30 ms or longer	
Display	Reference condition ^{*13}	Select from Standard conditions or Normal conditions.	
	Unit ^{*14}	l/min, CFM (ft ³ /min)	
	Instantaneous flow	L, ft ³	
	Accumulated flow		
	Display range ^{*15}	0 to 1050 l/min (Flow under 10 l/min is displayed as "0")	0 to 2100 l/min (Flow under 20 l/min is displayed as "0")
	Instantaneous flow	0 to 999,999,999,990 L	
	Accumulated flow ^{*16}		
	Minimum display unit	1 l/min	2 l/min
	Instantaneous flow	10 L	
	Accumulated flow		
Environmental resistance	Display	LCD, 2-screen display (Main screen/Sub screen) Main screen: Red/Green, Sub screen: Orange Main screen: 4 digits, 7 segment, Sub screen: 6 digits, 7 segment	
	Indicator LED	OUT indicator: Red LED is ON when output is ON	
	Enclosure	IP65	
	Withstand voltage	1000 VAC for 1 minute between terminals and housing	
	Insulation resistance	50 MΩ (500 VDC measured via megohmmeter) between terminals and housing	
Standards	Operating temperature range	Operating: 0 to 50 °C, Stored: -10 to 60 °C (No freezing or condensation)	
	Operating humidity range	Operating/Stored: 35 to 85 % RH (No condensation)	
Piping	Piping specification	Modular (Body size: 30)	Modular (Body size: 40)
Main materials of parts in contact with fluid		Stainless steel 304, Aluminum alloy, PPS, HNBR [Sensor: Pt, Au, Ni, Fe, Lead glass (exempted from the RoHS application), Al ₂ O ₃]	
Length of lead wire with connector		3 m	
Weight	Body	350 g	400 g
	Lead wire with connector	+90 g	

^{*1} Air quality grade is JIS B 8392-1:2012 [4.6:-] and ISO 8573-1:2010 [4.6:-].

^{*2} Set point range will change according to the setting of the zero cut-off function.

^{*3} When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum update limit of the memory device is 1.5 million times. If the product is operated 24 hours per day, the product life will be as follows:
 · 5 min interval: life is calculated as 5 min x 1.5 million = 7.5 million min = 14.3 years
 · 2 min interval: life is calculated as 2 min x 1.5 million = 3 million min = 5.7 years
 If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.

^{*4} Do not release the OUT side piping port of the product to the atmosphere without connecting piping. If the product is used with the piping port released to atmosphere, accuracy may vary.

^{*5} The value when connecting a product with a port size of 3/8 (PF3A701H) or 1/2 (PF3A702H)

^{*6} The value when the port size of the modular product is 3/8 (PF3A701H) or 1/2 (PF3A702H) and the product is operated at a supply pressure of 0.5 MPa

^{*7} The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the switch output turns ON (or OFF) when set to be 90 % of the rated flow rate

^{*8} If the flow fluctuates around the set value, the width for setting more than the fluctuating width needs to be set. Otherwise, chattering will occur.

^{*9} Analogue output or external input can be selected by pressing the buttons. Refer to the graph for Analogue output.

^{*10} When selecting 0 to 10 V, refer to the Analogue output graph for the allowable load current.

^{*11} The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analogue output reaches 90 % of the rated flow rate

^{*12} Analogue output or external input can be selected by pressing the buttons.

^{*13} The flow rate given in the specifications is the value under standard conditions.

^{*14} Setting is only possible for models with the units selection function.

^{*15} Display range will change according to the setting of the zero cut-off function.

^{*16} The accumulated flow display is the upper 6-digit and lower 6-digit (total of 12 digits) display. When the upper digits are displayed, x 10⁶ lights up.

* Products with tiny scratches, marks, or display colour or brightness variations which do not affect the performance of the product are verified as conforming products.

How to Order



PF3A 7 01 H-L Q-M - -

Type

7 Integrated display

Rated flow range

Symbol	Rated flow range	Applicable air combination model
01	10 to 1000 l/min	AC30-D
02	20 to 2000 l/min	AC40-D

Large flow type

Output specification

Symbol	OUT	FUNC*1	Applicable monitor unit model
L	IO-Link/ Switch output (N/P)	—	—
L3	IO-Link/ Switch output (N/P)	Analogue voltage output*2 ⇔ External input*3	PFG300 series
L4	IO-Link/ Switch output (N/P)	Analogue current output ⇔ External input*3	PFG310 series

- *1 Analogue output or external input can be selected by pressing the buttons. Analogue output is set as default setting.
 *2 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.
 *3 The accumulated value, peak value, and bottom value can be reset.

Flow direction

—	Left to right
R	Right to left

Calibration certificate*7

—	None
A	Yes

*7 The certificate is in both English and Japanese.

Unit specification

—	Units selection function
M	SI units only*6

*6 Fixed units: Instantaneous flow: l/min
Accumulated flow: L

Option*4

—	With lead wire with M12 connector (3 m)
N	Without lead wire with M12 connector
Q	Lead wire with M12-M12 connector (3 m)*5

*4 Options are shipped together with the product but do not come assembled.

*5 The lead wire has an M12 (female) connector on one side and an M12 (male) connector on the other side.

Options/Part Nos.


When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
ZS-37-A	Lead wire with M12 connector	Length: 3 m
ZS-49-A	Lead wire with M12-M12 connector	Male/female conversion, Length: 3 m

Caution on Mounting

Pipe threads are not provided for this product. If the product is to be used as a single unit, order a spacer (or spacer with bracket) and a piping adapter separately. Refer to page 26 for details on attachments.

Assembly Example

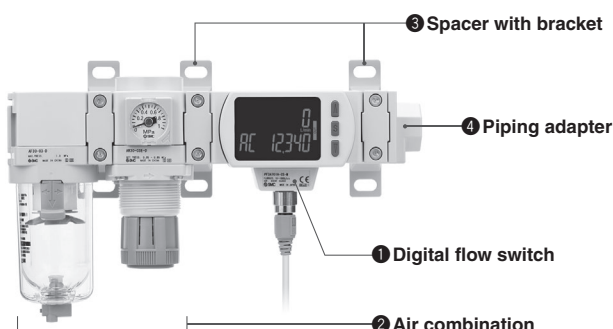

- * Avoid mounting the lubricator on the inlet side.
 * If a pressure relief 3-port valve is installed on the inlet side of the digital flow switch, causing a backflow of air, the measured value will change.

Assembly example

① Digital flow switch PF3A701H-L-M	1 pc.
② Air combination AC30B-03E-D	1 pc.
③ Spacer with bracket Y300T-D	2 pcs.
④ Piping adapter E300-03-D	1 pc.

Products do not come assembled. They should be ordered separately and assembled by the customer.



Simple Specials System

A system designed to respond quickly and easily to your special ordering needs

Please contact your local sales representative for more details.

For flow switch precautions and specific product precautions, refer to the “Operation Manual” on the SMC website.

Specifications

Model			PF3A701H-L	PF3A702H-L
Electrical	Power supply voltage	When used as a switch output device	24 VDC ±10 %	
		When used as an IO-Link device	21.6 to 30 VDC	
Switch output	Output type		Select from NPN or PNP open collector output.	
	Output mode		Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.	
	Max. applied voltage		30 V (NPN output)	
	Internal voltage drop (Residual voltage)		1.5 V or less (at load current of 80 mA)	
	Delay time*1		3.3 ms or less, variable from 0 to 60 s/0.01 s increments	
Analogue output	Response time*2		Linked to the set value of the digital filter	
Display	Display		LCD, 2-screen display (Main screen/Sub screen) Main screen: Red/Green, Sub screen: Orange Main screen/Sub screen: 9 digits (7 segments 7 digits, 11 segments 2 digits)	
	Digital filter*3		Select from 1 s, 2 s, or 5 s.	
Standards			CE marking (EMC Directive, RoHS Directive)	

*1 The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.

*2 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analogue output reaches 90 % of the rated flow rate

*3 The time for the digital filter can be set to the sensor input. The response time indicates when the set value is 90 % in relation to the step input.

Communication Specifications (IO-Link mode)

IO-Link type	Device
IO-Link version	V 1.1
Communication speed	COM2 (38.4 kbps)
Configuration file	IODD file*1
Minimum cycle time	3.3 ms
Process data length	Input data: 4 bytes, Output data: 0 byte
On request data communication	Yes
Data storage function	Yes
Event function	Yes
Vendor ID	131 (0 x 0083)
Device ID*2	PF3A701H-□□-□□-□□ : 394 (0 x 018A)
	PF3A701H-□□-□□-□□ : 395 (0 x 018B)
	PF3A701H-□□-□□-□□ : 396 (0 x 018C)
	PF3A702H-□□-□□-□□ : 397 (0 x 018D)
	PF3A702H-□□-□□-□□ : 398 (0 x 018E)
	PF3A702H-□□-□□-□□ : 399 (0 x 018F)

*1 The configuration file can be downloaded from the SMC website, <https://www.smc.eu>

*2 The device ID differs according to each product type (output specification).

Other specifications that are not listed are the same as those of the standard product. For details, refer to page 16.

PF3A7□H(-L) Series

Flow Range

Model	Flow range				
	0 l/min	1000 l/min	3000 l/min	6000 l/min	12000 l/min
PF3A701H(-L)	10 l/min	1000 l/min			
	10 l/min	1050 l/min			
	0 l/min	1050 l/min			
PF3A702H(-L)	20 l/min	2000 l/min			
	20 l/min	2100 l/min			
	0 l/min	2100 l/min			
PF3A703H(-L)	30 l/min	3000 l/min			
	30 l/min	3150 l/min			
	0 l/min	3150 l/min			
PF3A706H(-L)	60 l/min	6000 l/min			
	60 l/min	6300 l/min			
	0 l/min	6300 l/min			
PF3A712H(-L)	120 l/min	12000 l/min			
	120 l/min	12600 l/min			
	0 l/min	12600 l/min			

Rated flow range

Set point range

Display range

Analogue Output



Flow/Analogue Output

	0 l/min	A*2	B
Voltage output (1 to 5 V)*1	1 V	1.04 V	5 V
Current output*1	4 mA	4.16 mA	20 mA

	0 l/min	C*2	D
Voltage output (0 to 10 V)*1*3	0 V	0.1 V	10 V


Model	Min. value of the rated flow range*4	Max. value of the rated flow range
PF3A701H(-L)	10 l/min	1000 l/min
PF3A702H(-L)	20 l/min	2000 l/min
PF3A703H(-L)	30 l/min	3000 l/min
PF3A706H(-L)	60 l/min	6000 l/min
PF3A712H(-L)	120 l/min	12000 l/min

- *1 Analogue output accuracy is within $\pm 3\%$ F.S.
- *2 A and C will change according to the setting of the zero cut-off function.
- *3 The analogue output current from the connected equipment should be $20\text{ }\mu\text{A}$ or less when selecting 0 to 10 V. When more than $20\text{ }\mu\text{A}$ current flows, it is possible that the accuracy is not satisfied below 0.5 V.
- *4 The minimum value of the rated flow range will change according to the setting of the zero cut-off function.

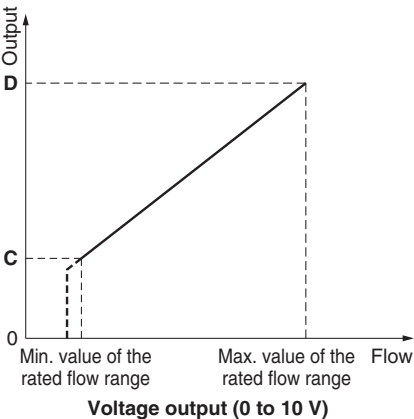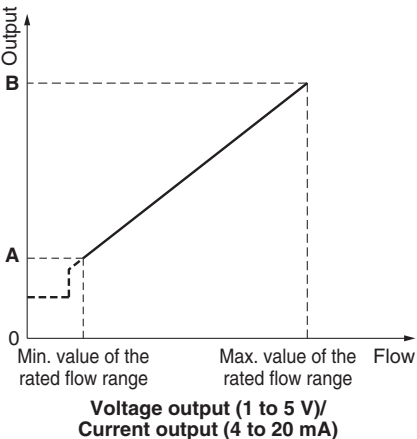


Pressure Loss (Reference Data)


PF3A701H (for 1000 l/min)

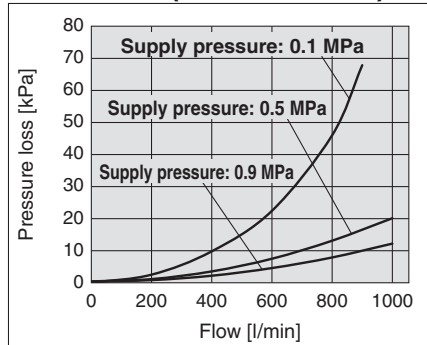


PF3A702H (for 2000 l/min)

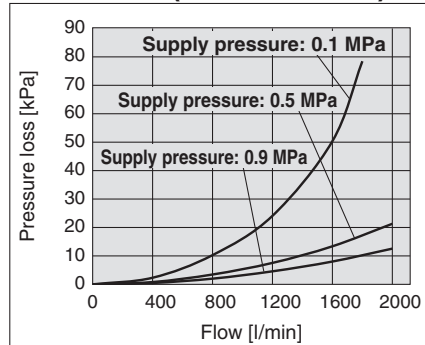


PF3A703H(-L) (for 3000 l/min)

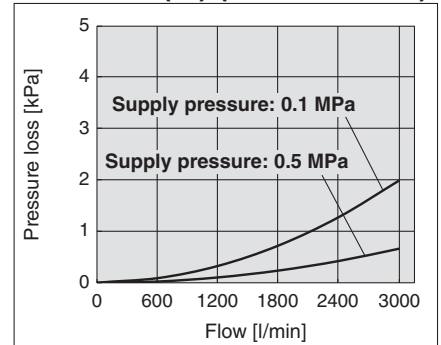

PF3A706H(-L) (for 6000 l/min)

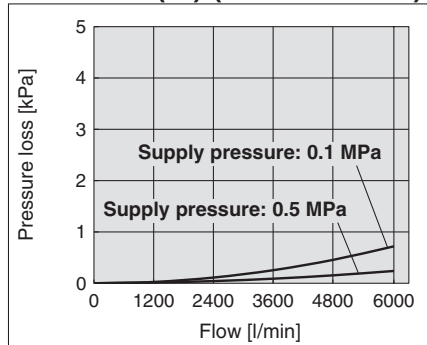


PF3A712H(-L) (for 12000 l/min)

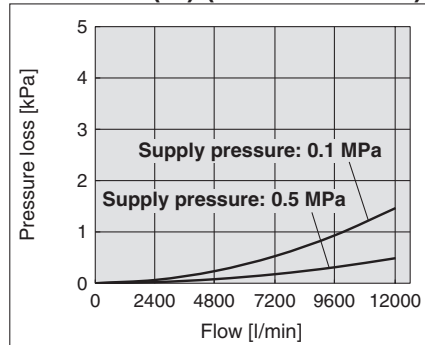

Flow Rate Characteristics (Reference Data)


AC30B-D + PF3A701H

Rc3/8

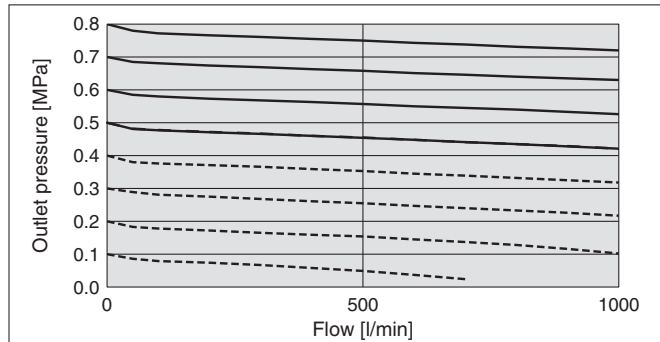


AC40B-D + PF3A702H

Rc1/2

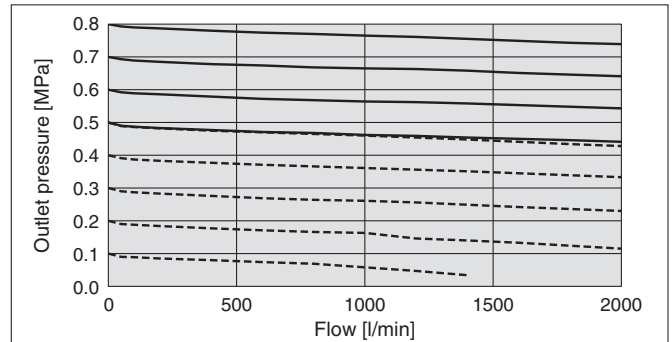


AW30-D + PF3A701H

Rc3/8

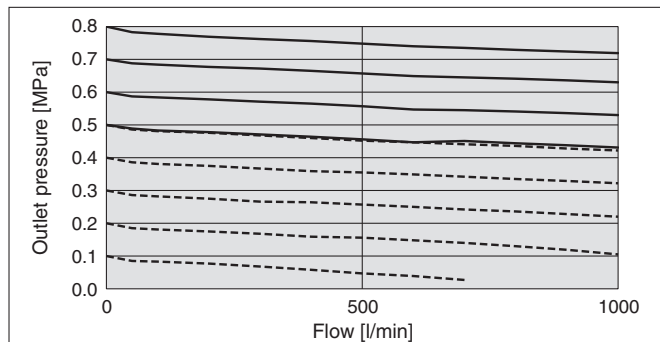

AW40-D + PF3A702H

Rc1/2

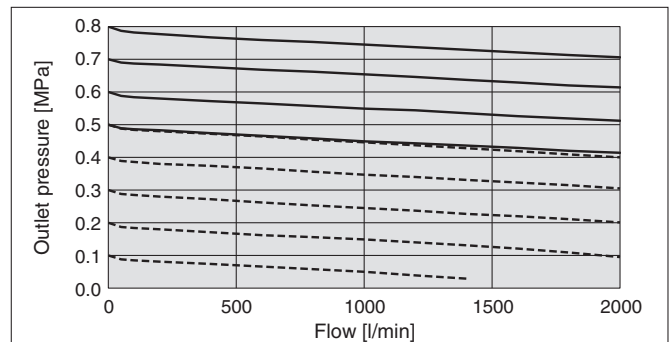


* This product cannot be used for applications in which the flow exceeds the rated flow range. Use caution when selecting a product.


PF3A7□H(-L) Series

IN Side Straight Section and Accuracy (Reference Data)


PF3A703H(-L) (for 3000 l/min)

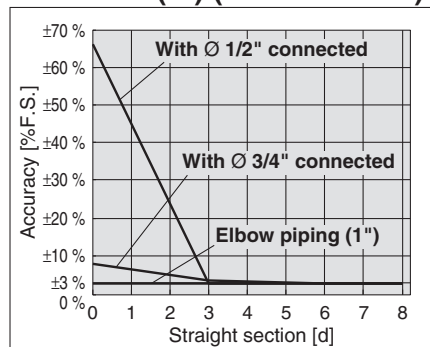

PF3A706H(-L) (for 6000 l/min)

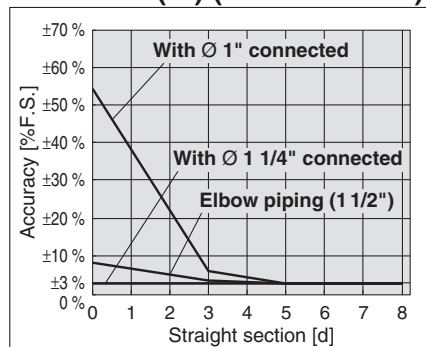

PF3A712H(-L) (for 12000 l/min)

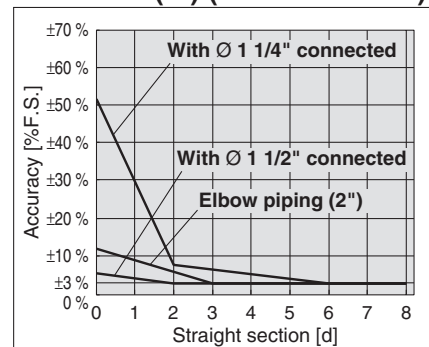


- Do not connect equipment or piping which may generate a fluctuation in the flow or drift at the IN side of the product. When installing a regulator at the IN side of the product, make sure that hunting is not generated.

- The piping on the IN side must have a straight section of piping whose length is more than 8 times the piping I.D.


If a straight section of piping is not installed, the accuracy may vary by $\pm 3\%$ F.S. or more.

* "Straight section" means a section of piping without any bends or rapid changes in the cross sectional area.

When piping with diameter smaller than the straight section is connected




When piping of different diameter is connected to the IN port

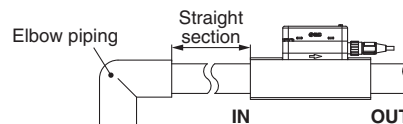

When elbow piping is connected to the IN port


Internal Circuits and Wiring Examples

NPN + Analogue output selected PF3A7□□H-□□-CS/DS-□□

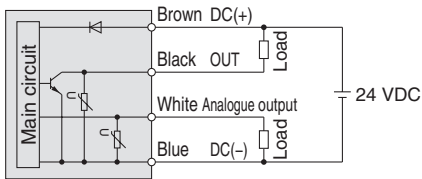


Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less
 CS: Analogue output: 1 to 5 V or 0 to 10 V
 Output impedance: 1 k Ω
 DS: Analogue output: 4 to 20 mA
 Max. load impedance: 600 Ω
 Min. load impedance: 50 Ω

PNP + Analogue output selected PF3A7□□H-□□-ES/FS-□□

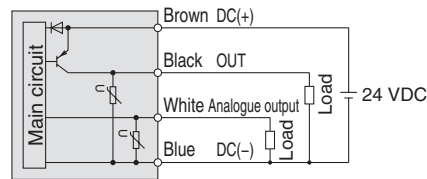


Max. load current: 80 mA, Internal voltage drop: 2 V or less
 ES: Analogue output: 1 to 5 V or 0 to 10 V
 Output impedance: 1 k Ω
 FS: Analogue output: 4 to 20 mA
 Max. load impedance: 600 Ω
 Min. load impedance: 50 Ω

NPN + External input selected PF3A7□□H-□□-CS/DS-□□

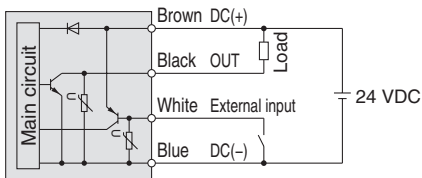


Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less
 External input: Input voltage 0.4 V or less (Reed or Solid state input) for 30 ms or longer

PNP + External input selected PF3A7□□H-□□-ES/FS-□□

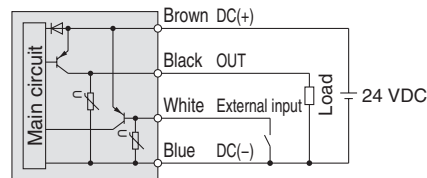


Max. load current: 80 mA, Internal voltage drop: 2 V or less
 External input: Input voltage 0.4 V or less (Reed or Solid state input) for 30 ms or longer

Accumulated pulse output wiring examples PF3A7□□H-□□-CS/DS-□□

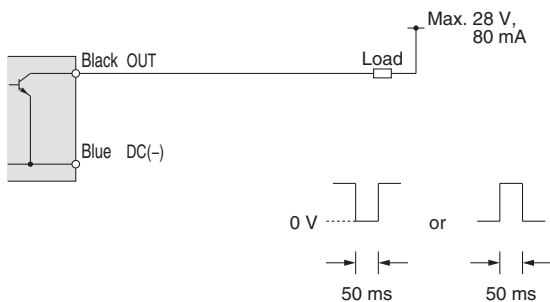

PF3A7□□H-□□-ES/FS-□□

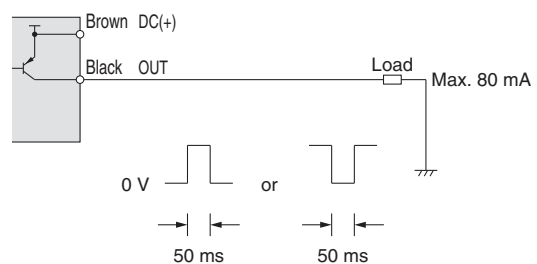


PF3A7□H(-L) Series

Internal Circuits and Wiring Examples


PF3A7□□H-□□-L□-□□

NPN output type

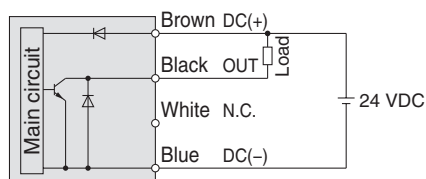

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


PNP output type

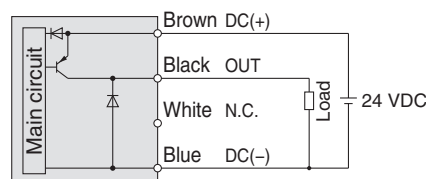

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

PF3A7□□H-□□-L3/L4□-□□

NPN + Analogue output selected

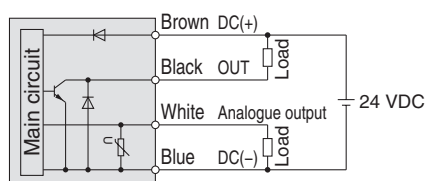

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

L3: Analogue output: 1 to 5 V or 0 to 10 V


Output impedance: 1 k Ω

L4: Analogue output: 4 to 20 mA

Max. load impedance: 600 Ω

Min. load impedance: 50 Ω

PNP + Analogue output selected

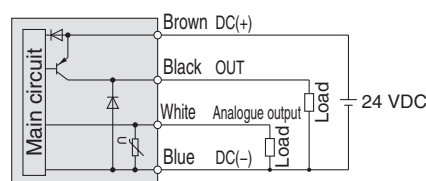

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

L3: Analogue output: 1 to 5 V or 0 to 10 V

Output impedance: 1 k Ω


L4: Analogue output: 4 to 20 mA

Max. load impedance: 600 Ω

Min. load impedance: 50 Ω

PF3A7□□H-□□-L3/L4□-□□


NPN + External input selected

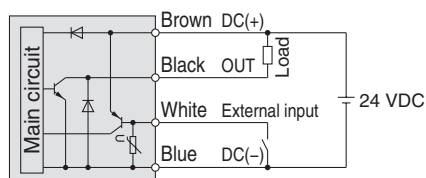

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

External input voltage: 0.4 V or less (Reed or Solid state input) for 30 ms or longer


PNP + External input selected

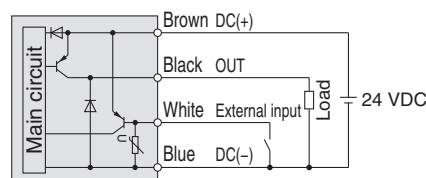

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

External input voltage: 0.4 V or less (Reed or Solid state input) for 30 ms or longer


When used as an IO-Link device

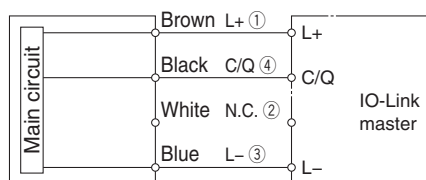

* The numbers in the diagram show the connector pin layout.

Construction: Parts in Contact with Fluid


PF3A703H(-L)/706H(-L)/712H(-L)

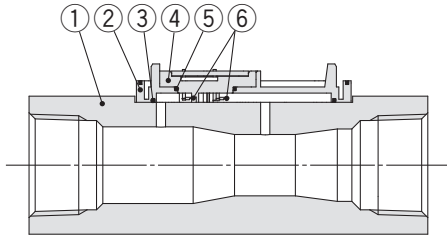

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Branch passage	PPS	—
3	Gasket	HNBR	—
4	Sensor base	PPS	—
5	Gasket	HNBR	—
6	Sensor	Au, Pt, Al ₂ O ₃	—

PF3A701H/702H

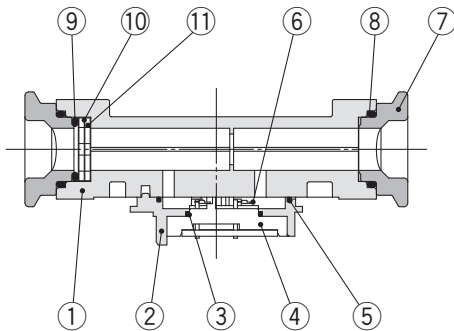


Component Parts

No.	Description	Material	Note
1	Body	ADC	
2	Branch passage	PPS	
3	Gasket	HNBR	
4	Sensor base	PPS	
5	Gasket	HNBR	
6	Sensor	Au, Pt, Al ₂ O ₃	
7	Attachment	ADC	
8	O-ring	HNBR	
9	O-ring	HNBR	
10	Mesh	Stainless steel 304	
11	Spacer	PPS	

Dimensions

PF3A703H(-L)/706H(-L)/712H(-L)

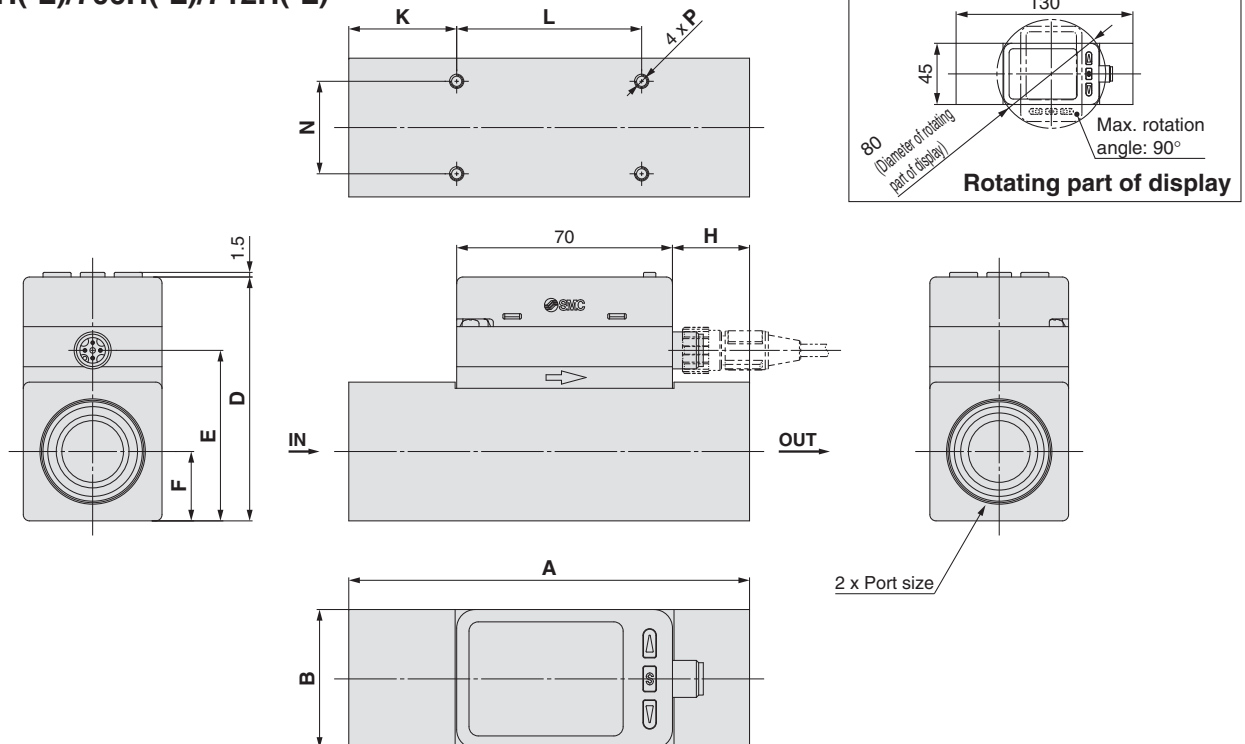


Model	Symbol	Port size	A	B	D	E	F	H	K	L	N	P
PF3A703H		Rc1, NPT1, G1	130	45	79.1	55.3	22.5	25	35	60	30	M4 x 0.7 depth 7
PF3A706H		Rc1 1/2, NPT1 1/2, G1 1/2	170	60	94.1	70.3	30	68	45	80	40	M5 x 0.8 depth 8
PF3A712H		Rc2, NPT2, G2	200	70	104.1	80.3	35	85	50	100	50	M6 x 1.0 depth 9

PF3A7□H(-L) Series


Dimensions

PF3A701H/702H

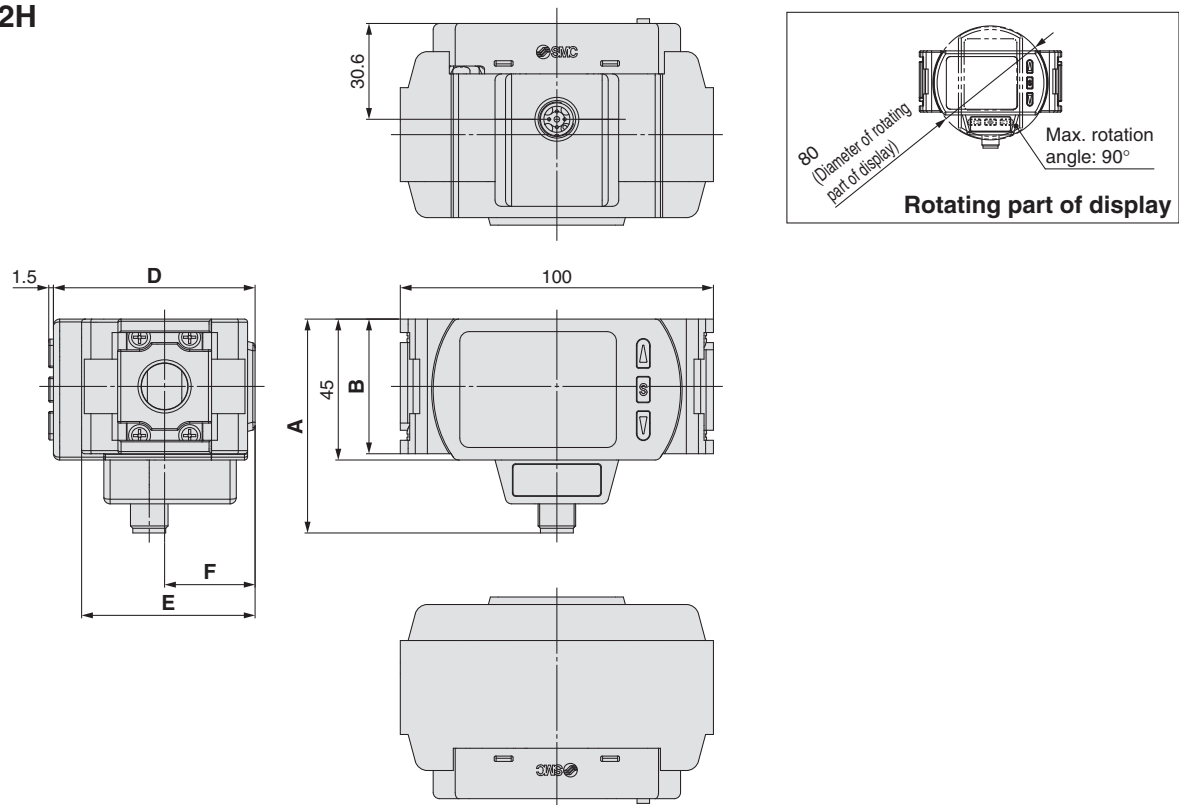

Model	Symbol	A	B	D	E	F
PF3A701H		68.3	43	64.4	55.4	28.9
PF3A702H		72.3	51	73	71	35.5

Lead wire with M12 connector (Part no.: ZS-37-A)

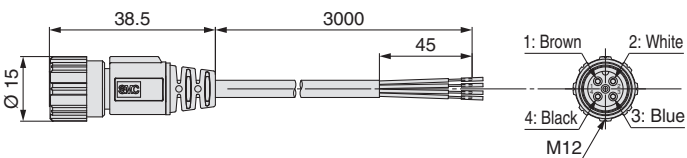


Pin no.	Pin name	Wire colour
1	DC(+)	Brown
2	FUNC	White
3	DC(-)	Blue
4	OUT(C/Q)	Black

* 4-wire type lead wire with M12 connector used for the PF3A series

Cable Specifications

Conductor	Nominal cross section	AWG23
Insulator	Outside diameter	Approx. 1.1 mm
	Colour	Brown, Blue, Black, White
Sheath	Finished outside diameter	Ø 4

Lead wire with M12-M12 connector (Part no.: ZS-49-A)

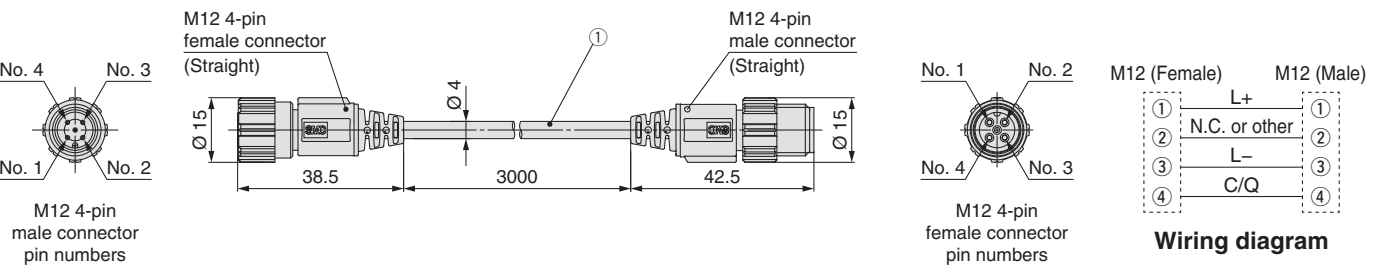


* For wiring, refer to the "Operation Manual" on the SMC website, <https://www.smc.eu>

PF3A7□H(-L) Series

Optional Accessories

Piping Adapter: 1/4, 3/8, 1/2, 3/4

A piping adapter allows for the installation/removal of the component without removing the piping and thus makes maintenance easier.

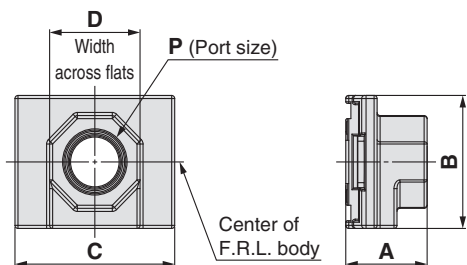


Model	P	A	B	C	D	Applicable air combination model
E300-□02-D	1/4	27	43	53	30	AC30-D
E300-□03-D	3/8					
E300-□04-D	1/2					
E400-□02-D	1/4	30	51	71	36	AC40-D
E400-□03-D	3/8					
E400-□04-D	1/2					
E400-□06-D	3/4					

* □ in model numbers indicates a pipe thread type. No indication is necessary for Rc; however, indicate N for NPT, and F for G.
* Separate spacers are required for modular unit.


Spacer/Spacer with Bracket

Spacer

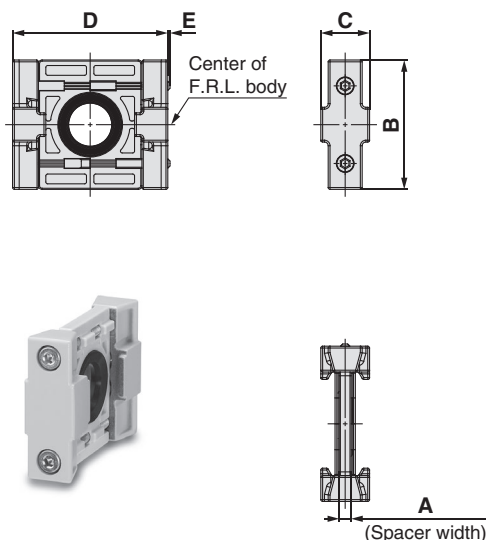


Model	A	B	C	D	E	Applicable air combination model
Y300-D	4.2	43	16.2	53	—	AC30-D
Y400-D	5.2	51	19.2	71	—	AC40-D

Spacer with bracket

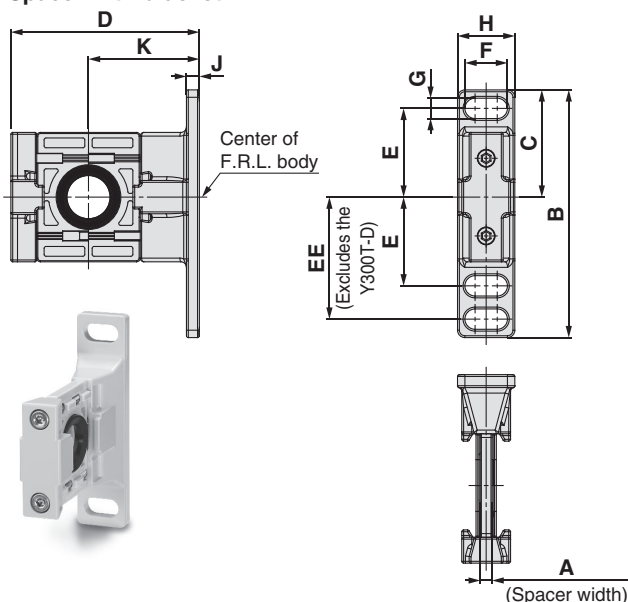

Model	A	B	C	D	E	EE	F	G	H	J	K	Applicable air combination model
Y300T-D	4.2	85	42.5	67.5	35	—	14	7	20	6	41	AC30-D
Y400T-D	5.2	115	50	85.5	40	55	18	9	26	7	50	AC40-D

Mounting Position Example

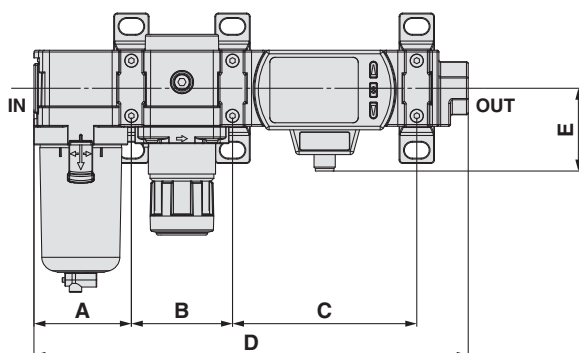

Applicable air combination model	A	B	C	D	E
AC30-D	55.1	57.2	104.2	245.6	46.8
AC40-D	72.6	75.2	105.2	285.6	46.8

3-Screen Display

Digital Flow Monitor

PFG300 Series



RoHS



How to Order

PFG 3 0 0 - RT - M - L

Type

3 Remote type monitor unit

Input specification

Symbol	Description	Applicable flow switch model
0	Voltage input	PF3A7□H-CS/ES/L3 series
1	Current input	PF3A7□H-DS/FS/L4 series

* The PFG3 (monitor unit) cannot be used as an IO-Link communication device.

Output specification

RT	2 outputs (NPN/PNP switching type) + Analogue voltage output*1, 2
SV	2 outputs (NPN/PNP switching type) + Analogue current output*2
XY	2 outputs (NPN/PNP switching type) + Copy function

*1 Can switch between 1 to 5 V and 0 to 10 V

*2 Can be switched to external input or copy function

Unit specification

—	Units selection function
M	SI units only*3

*3 Fixed units: Instantaneous flow: l/min
Accumulated flow: L

Option 4

	Operation manual	Calibration certificate
—	○	—
Y	—	—
K	○	○
T	—	○

Option 3

—	None
C	ZS-28-CA-4 Sensor connector

Option 2

Symbol	Description
—	None
A1	Bracket A (Vertical mounting) ZS-46-A1
A2	Bracket B (Horizontal mounting) ZS-46-A2
B	Panel mount adapter ZS-46-B
D	Panel mount adapter + Front protection cover ZS-46-D


Symbol	Description
—	Without lead wire
L	Power supply/output connection lead wire (Lead wire length: 2 m) ZS-46-5L

Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
ZS-28-CA-4	Sensor connector	For PF3A7□H
ZS-46-A1	Bracket A	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
ZS-46-A2	Bracket B	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
ZS-46-B	Panel mount adapter	
ZS-46-D	Panel mount adapter + Front protection cover	
ZS-46-5L	Power supply/output connection lead wire	5-core, 2 m
ZS-27-01	Front protection cover	

Connection Example

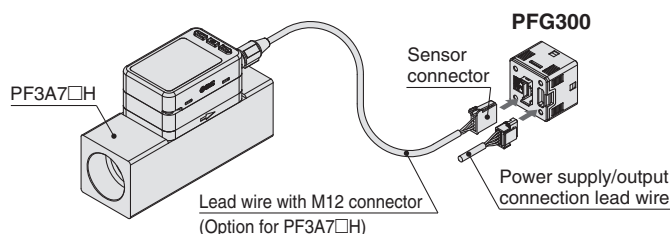

Specifications

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

Model			PFG300 series					
Applicable SMC flow switch	Model		PF3A701H	PF3A702H	PF3A703H	PF3A706H	PF3A712H	
	Rated flow range*1		10 to 1000 l/min	20 to 2000 l/min	30 to 3000 l/min	60 to 6000 l/min	120 to 12000 l/min	
Flow	Set point range	Instantaneous flow	–50 to 1050 l/min	–100 to 2100 l/min	–150 to 3150 l/min	–300 to 6300 l/min	–600 to 12600 l/min	
		Accumulated flow	0 to 999,999,999,990 L		0 to 999,999,999,990 L		0 to 999,999,999,900 L	
	Smallest settable increment	Instantaneous flow	1 l/min		2 l/min		5 l/min	10 l/min
		Accumulated flow	10 L		10 L		100 L	
	Accumulated volume per pulse (Pulse width = 50 ms)		10 L/pulse		10 L/pulse		100 L/pulse	
Accumulated value hold function*3		Intervals of 2 or 5 minutes can be selected. The stored accumulated flow is held even when the power supply is OFF.						
Electrical	Power supply voltage		12 to 24 VDC ±10 % (24 VDC when the PF3A7□H is connected)					
	Current consumption		25 mA or less					
	Protection		Polarity protection					
Accuracy	Display accuracy		±0.5 % F.S. ± Minimum display unit (Ambient temperature of 25 °C)					
	Analogue output accuracy		±0.5 % F.S. (Ambient temperature of 25 °C)					
	Repeatability		±0.1 % F.S. ± Minimum display unit					
	Temperature characteristics		±0.5 % F.S. (Ambient temperature: 0 to 50 °C, 25 °C standard)					
Switch output	Output type		Select from NPN or PNP open collector output.					
	Output mode		Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.					
	Switch operation		Select from Normal or Reversed output.					
	Max. load current		80 mA					
	Max. applied voltage (NPN only)		30 VDC					
	Internal voltage drop (Residual voltage)		NPN output: 1 V or less (at load current of 80 mA), PNP output: 1.5 V or less (at load current of 80 mA)					
	Response time*2		3 ms or less					
	Delay time*2		Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, 30 s, 40 s, 50 s, or 60 s.					
	Hysteresis*4		Variable from 0					
Analogue output*5	Protection		Short circuit protection					
	Output type		Voltage output: 1 to 5 V, 0 to 10 V (only when the power supply voltage is 24 VDC) Current output: 4 to 20 mA (0 l/min to maximum value of the rated flow)					
	Impedance	Voltage output	Output impedance: 1 kΩ					
		Current output	Maximum load impedance: 300 Ω (at power supply voltage of 12 V), 600 Ω (at power supply voltage of 24 VDC)					
	Response time*2		50 ms or less					
External input*6	External input		Input voltage: 0.4 V or less (Reed or Solid state) for 30 ms or longer					
	Input mode		Select from Accumulated value external reset or Peak/Bottom value reset.					
Sensor input	Input type		Voltage input: 1 to 5 VDC (Input impedance: 1 MΩ), Current input: 4 to 20 mA DC (Input impedance: 51 Ω) (0 l/min to maximum value of the rated flow)					
	Connection method		Connector (e-CON)					
	Protection		Over voltage protection (Up to 26.4 VDC)					
Display	Display mode		Select from Instantaneous flow or Accumulated flow.					
	Unit*7	Instantaneous flow	l/min, cfm (ft³/min)					
		Accumulated flow	L, ft³, L x 10 ⁶ , ft³ x 10 ⁶					
	Display range	Instantaneous flow	–50 to 1050 l/min	–100 to 2100 l/min	–150 to 3150 l/min	–300 to 6300 l/min	–600 to 12600 l/min	
		Accumulated flow*9	0 to 999,999,999,990 L		0 to 999,999,999,990 L		0 to 999,999,999,900 L	
	Minimum display unit	Instantaneous flow	1 l/min		2 l/min		5 l/min	10 l/min
		Accumulated flow	10 L		10 L		100 L	
	Display type		LCD					
	Number of displays		3-screen display (Main screen, Sub screen)					
	Display colour		1) Main screen: Red/Green, 2) Sub screen: Orange					
Number of display digits		1) Main screen: 5 digits (7 segments), 2) Sub screen: 9 digits (7 segments)						
Indicator LED		LED ON when switch output is ON. OUT1/2: Orange						
Digital filter*8		Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, or 30 s.						
Environment	Enclosure		IP40					
	Withstand voltage		1000 VAC for 1 minute between terminals and housing					
	Insulation resistance		50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing					
	Operating temperature range		Operating: 0 to 50 °C, Stored: –10 to 60 °C (No condensation or freezing)					
	Operating humidity range		Operating/Stored: 35 to 85 % RH (No condensation or freezing)					
Standards		CE marking (EMC directive/RoHS directive)						
Weight	Body		25 g (Excluding the power supply/output connection lead wire)					
	Lead wire with connector		+39 g					

*1 Rated flow range of the applicable flow switch

*2 Value without digital filter (at 0.00 s)

*3 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 1.5 million times. If the product is operated 24 hours per day, the product life will be as follows:

- 5 min interval: life is calculated as 5 min x 1.5 million = 7.5 million min = 14.3 years
- 2 min interval: life is calculated as 2 min x 1.5 million = 3 million min = 5.7 years

If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.

*4 If the flow fluctuates around the set value, the width for setting more than the fluctuating width needs to be set. Otherwise, chattering will occur.

*5 Setting is only possible for models with analogue output.

*6 Setting is only possible for models with external input.

*7 Setting is only possible for models with the units selection function.


*8 The response time indicates when the set value is 90 % in relation to the step input.

*9 The accumulated flow display is the upper 6-digit and lower 6-digit (total of 12 digits) display. When the upper digits are displayed, x 10⁶ lights up.


* Products with tiny scratches, marks, or display colour or brightness variations which do not affect the performance of the product are verified as conforming products.

Internal Circuits and Wiring Examples


-XY
-RT
-SV
NPN (2 outputs) + Copy function

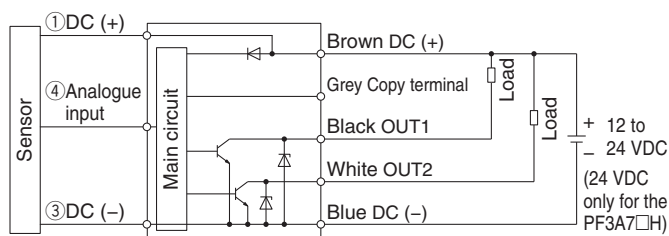


-XY
-RT
-SV
PNP (2 outputs) + Copy function

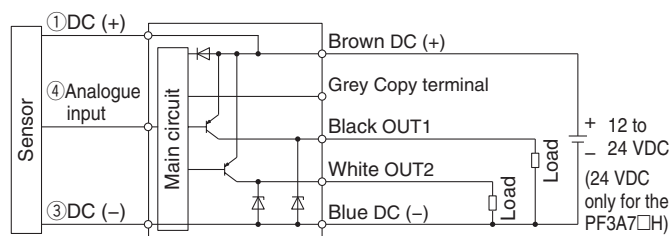


-RT: NPN (2 outputs) + Analogue voltage output
-SV: NPN (2 outputs) + Analogue current output

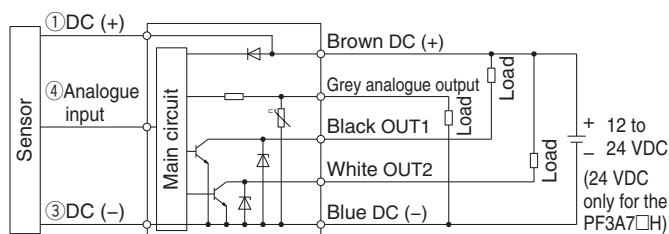


-RT: PNP (2 outputs) + Analogue voltage output
-SV: PNP (2 outputs) + Analogue current output

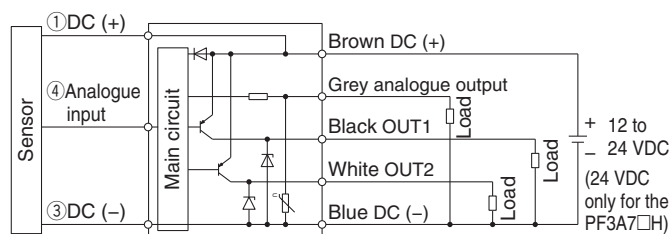

-RT: NPN (2 outputs) + External input
-SV: NPN (2 outputs) + External input

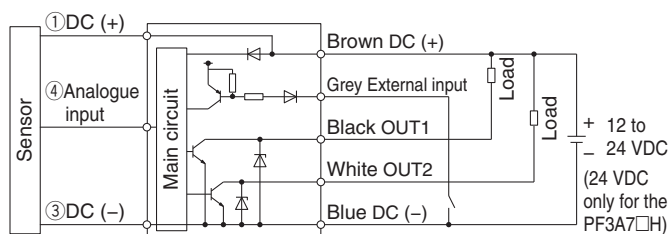


-RT: PNP (2 outputs) + External input
-SV: PNP (2 outputs) + External input

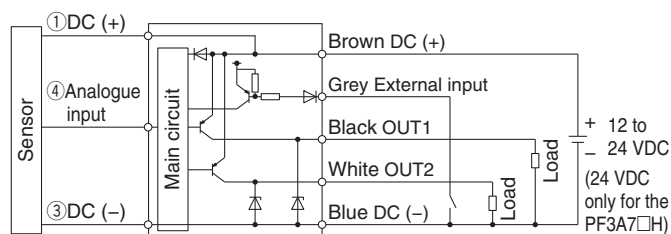


Accumulated pulse output wiring examples


NPN (2 outputs) type

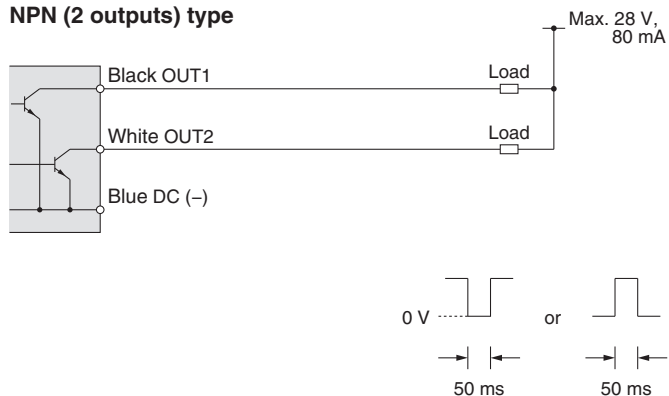


PNP (2 outputs) type

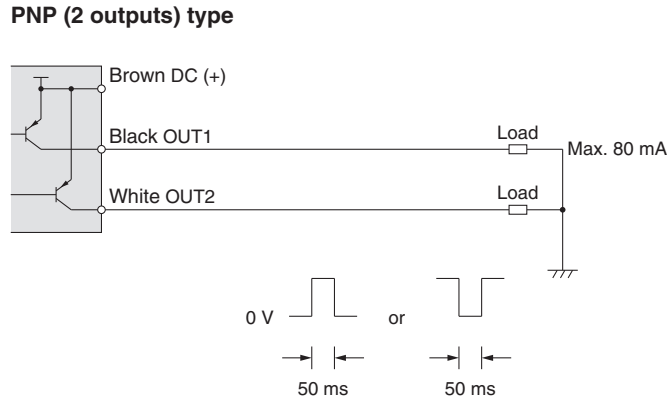




Dimensions

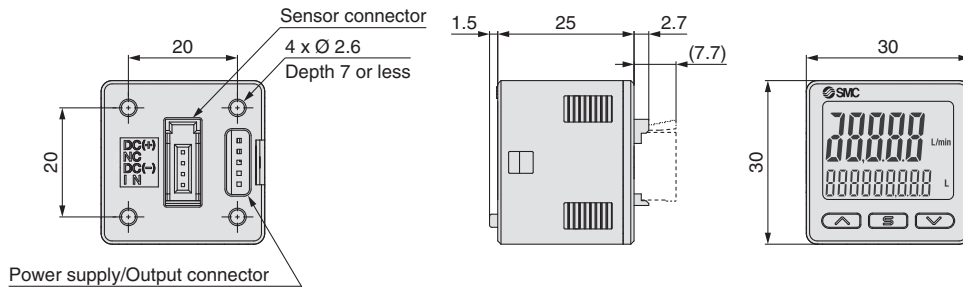




Bracket A (Part no.: ZS-46-A1)




* Bracket configuration allows for mounting in four orientations.

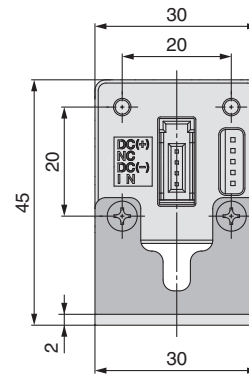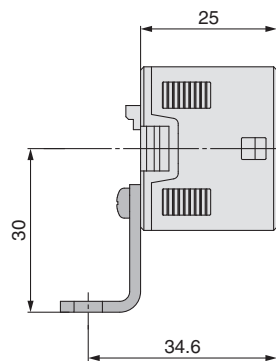

Bracket B (Part no.: ZS-46-A2)

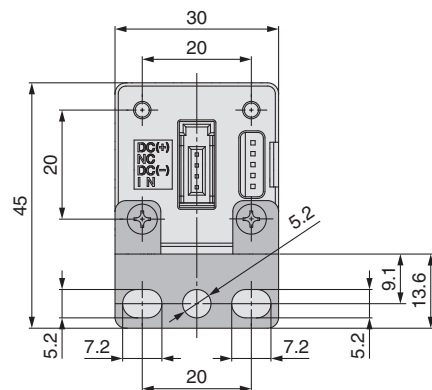


* Bracket configuration allows for mounting in four orientations.




PFG300 Series

Dimensions


Panel mount adapter (Part no.: ZS-46-B)

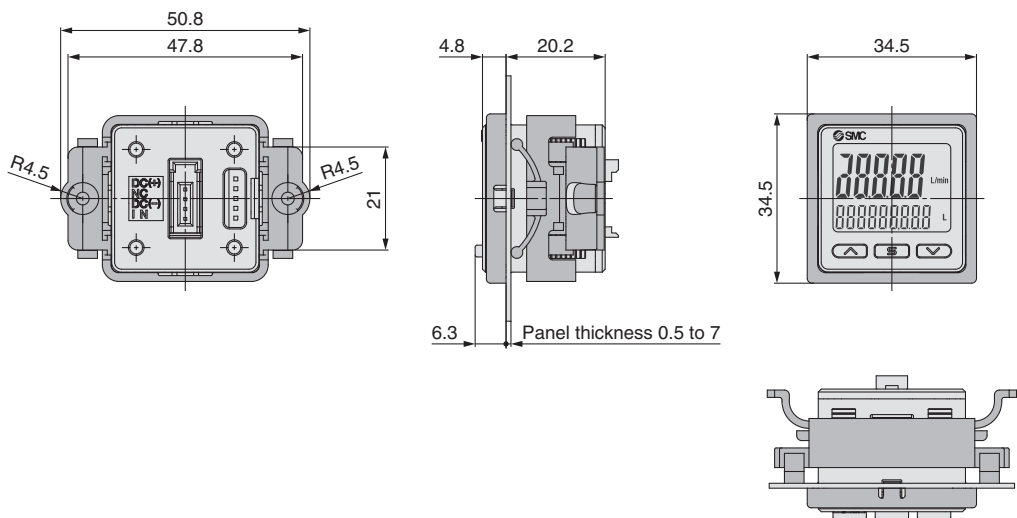

Panel mount adapter + Front protection cover (Part no.: ZS-46-D)

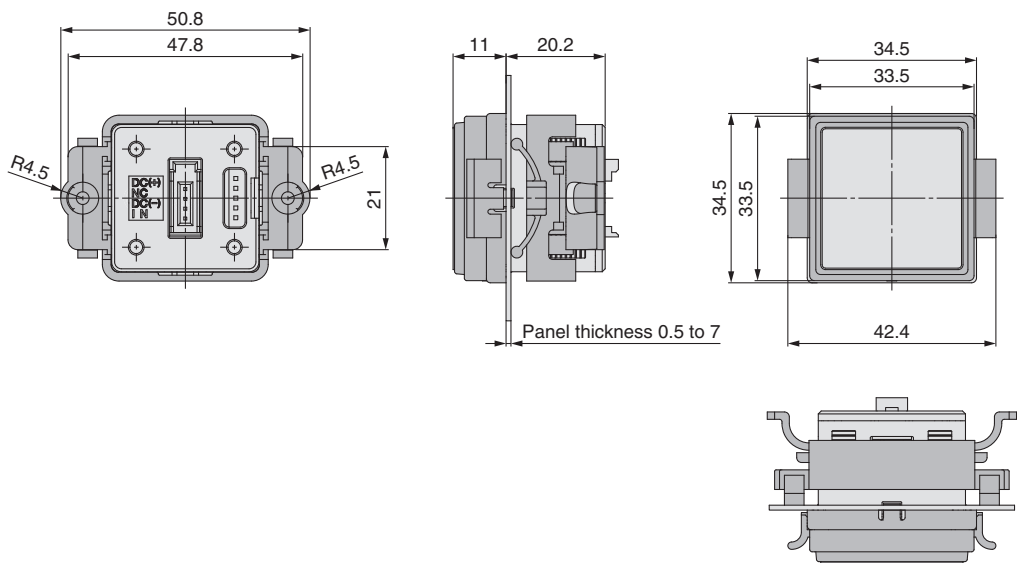


Power supply/output connection lead wire (Part no.: ZS-46-5L)

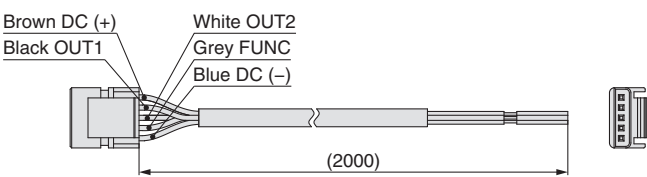

Sensor connector (Part no.: ZS-28-CA-4)

Pin no.	Terminal
1	DC (+)
2	N.C.
3	DC (-)
4	IN*1

*1 1 to 5 V or 4 to 20 mA




Cable Specifications

Conductor cross section		0.15 mm ² (AWG26)
Insulator	Outside diameter	1.0 mm
	Colour	Brown, Blue, Black, White, Grey (5-core)
Sheath	Finished outside diameter	Ø 3.5


Dimensions

Panel fitting dimensions


Individual mounting




Multiple (2 pcs. or more) secure mounting <Horizontal>

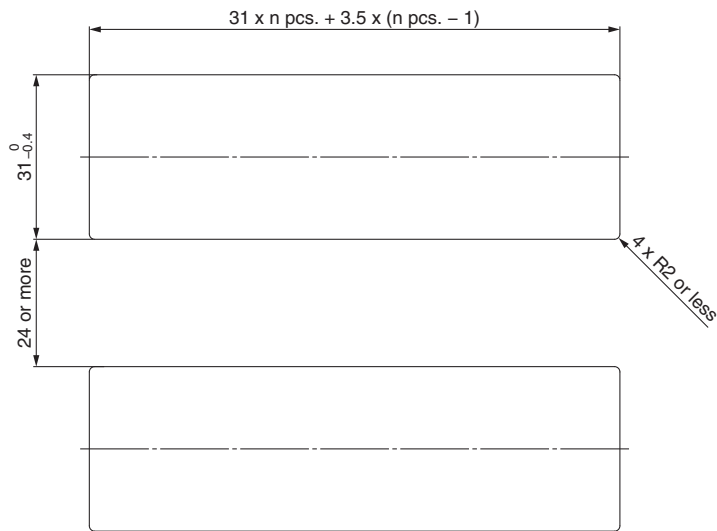


Panel mount example <Horizontal>

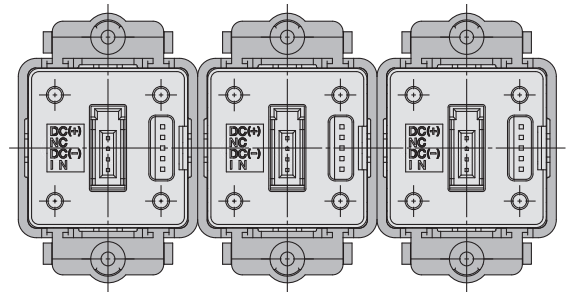

<Vertical>

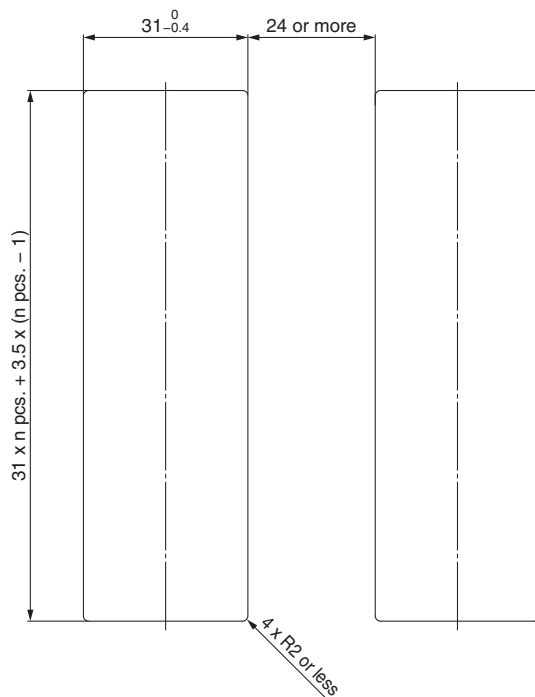

Panel mount example <Vertical>

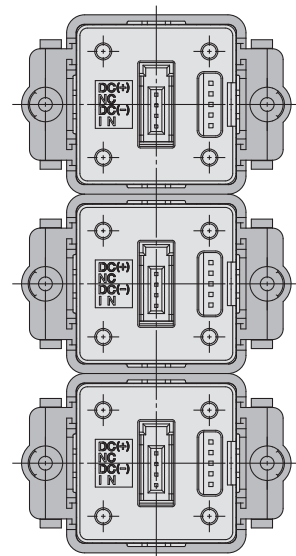

PF3A7□H(-L) Series Function Details

For the setting of functions and operation methods, refer to the "Operation Manual" on the SMC website.

Output operation

The output operation can be selected from the following:
Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow, or output (accumulated output and pulse output) corresponding to accumulated flow.

(Default setting: Hysteresis mode, Normal output)

Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. Output mode, output type, display colour, and accumulate pulse output cannot be changed.

Display colour

The display colour can be selected for each output condition. The selection of the display colour provides visual identification of abnormal values.

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

Reference condition

The display unit can be selected from standard conditions or normal conditions.

Standard conditions: Flow rate converted to a volume at 20 °C and 101.3 kPa (absolute pressure)
Normal conditions: Flow rate converted to a volume at 0 °C and 101.3 kPa (absolute pressure)

Response time (Digital filter)

The response time (digital filter) can be set to suit the application.
(Default setting: 1 s)

The effect of fluctuation and flickering of the display can be reduced by setting the response time (digital filter) to 2 seconds or 5 seconds.

1 s
2 s
5 s

FUNC output switching function

Analogue output or external input can be selected. (Default setting: Analogue output)

Selectable analogue output function

1 to 5 V or 0 to 10 V can be selected for the analogue voltage output type. (Default setting: 1 to 5 V)

External input function

The accumulated flow, peak value and bottom value can be reset remotely.

Accumulated value external reset: A function to reset the accumulated flow value when an external input signal is applied.

In accumulated increment mode, the accumulated value will reset to, and increase from zero.

In accumulated decrement mode, the accumulated value will reset to, and decrease from the set value.

* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory will be accessed. Take into consideration that the maximum number of times the memory can be accessed is 1.5 million times. The total number of external inputs and the accumulated value memorizing time interval should not exceed 1.5 million times.

Peak/Bottom value reset: Peak and bottom value are reset.

Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables confirmation of the wiring and prevents system errors due to unexpected output.

For the analogue output type: When ON, the output will be 5 V or 20 mA, and when OFF, 1 V or 4 mA.

For the IO-Link compatible PF3A7□H-L series, diagnostic bit (error and flow rate) and process data (PD) flow measurement can be checked.

* Also, the increase or decrease of the flow will not change the on/off status of the output while the forced output function is activated.

Accumulated value hold

Accumulated value is not cleared even when the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement, and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 1.5 million times, which should be taken into consideration.

Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

Display OFF mode

This function will turn the display OFF.

In the display OFF mode, three digits " _ _ _ " on the right of the sub display will flash.

If any button is pressed during this mode, the display reverts to normal for 30 seconds to allow checking of the flow, etc.

When the flow monitor (PFG300 series) is connected, the displayed values might be different due to an error. When the flow monitor display is used, it is recommended to set this product to the display OFF mode.

Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of shipment from the factory, it is set such that a security code is not required.

Key-lock function


Prevents operation errors such as accidentally changing setting values

Reset to the default settings

The product can be returned to its factory default settings.

Reversible display mode


When the switch is used upside down, the orientation of the display can be rotated to make it easier to read by using the reversible display function.

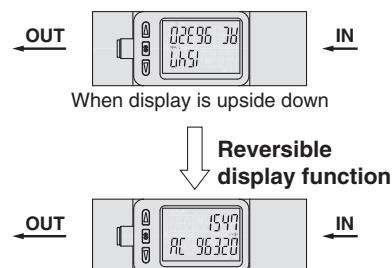

Zero cut-off function

When the flow is close to 0 l/min., the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 l/min due to high pressure or depending on the installation. The zero cut-off function will force the display to zero. The range to display zero can be changed.

Example) Vertical mounting, with fluid direction: Bottom to top

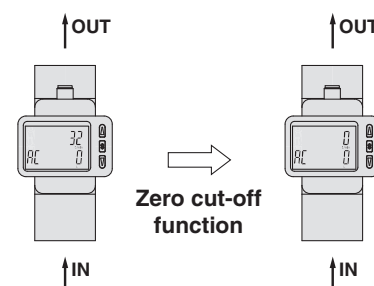

Delay time setting (PF3A7□H-L series only)

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

The total switching time is the switch operation time and the set delay time. (Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s



■ Selection of display on sub screen

The display on the sub screen in measuring mode can be set.

Sub screen 	Accumulated value display Displays the accumulated value 	Set value display Displays the set value 	Peak value display Displays the peak value 
	Switch output/communication mode display Displays the current mode (Only for the IO-Link compatible products) 	Bottom value display Displays the bottom value 	Line name display Displays the line name 

■ Analogue output free range function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed. The value can be changed between 10 % of the maximum value of the rated flow and the maximum value of the display range.

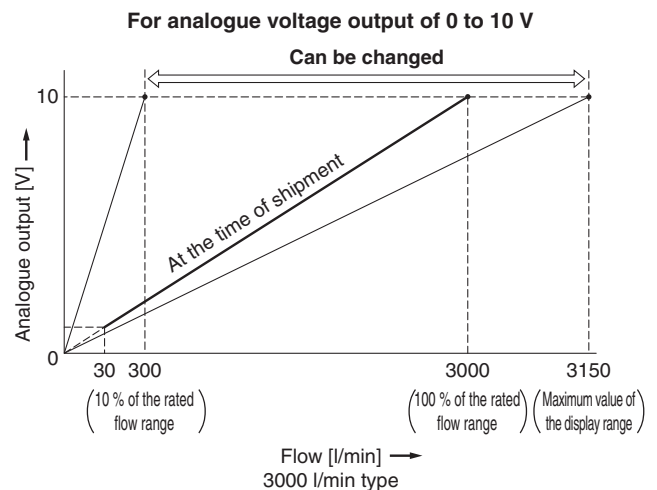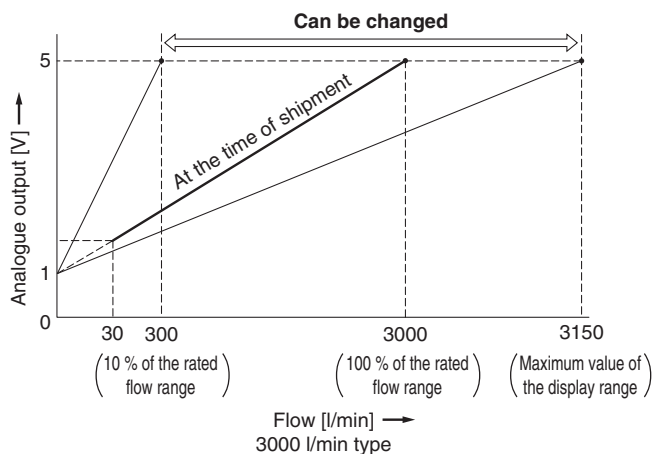

■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Error name	Description	Action
E _r 1	OUT over current error	A load current of 80 mA or more is applied to the switch output (OUT).	Eliminate the cause of the over current by turning off the power supply and then turning it on again.
HHH	Instantaneous flow error	The flow rate exceeds the maximum value of the display range.	Decrease the flow rate.
999999 (Flashing)	Accumulated flow error	The accumulated flow has exceeded the accumulated flow range. (For accumulated increment)	Reset the accumulated flow.
0 (Flashing)	Accumulated flow error	The accumulated flow has reached the set accumulated flow value. (For accumulated decrement)	
E _r 3	Outside of zero-clear range	During zero-clear operation, the flow rate of 5 % F.S. or more is applied. (The mode is returned to measurement mode after 1 second.)	Retry the zero-clear operation without applying fluid.
E _r 0	System error	An internal data error has occurred.	Turn the power off and then on again.
E _r 4			
E _r 6			
E _r 7			
E _r 8			
E _r 10			
E _r 12			
E _r 14			
E _r 16			
E _r 40			
E _r 15	Version does not match * Only for the IO-Link compatible products	The IO-Link version does not match that of the master.	Ensure that the master IO-Link version matches the device version.

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.

PFG300 Series

Function Details

For the setting of functions and operation methods, refer to the "Operation Manual" on the SMC website.

Output operation

The output operation can be selected from the following:
Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow or output (accumulated output and pulse output) corresponding to accumulated flow.

(Default setting: Hysteresis mode, Normal output)

Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. Output mode, output type, display colour, and accumulate pulse output cannot be changed.

Display colour

The display colour can be selected for each output condition. The selection of the display colour provides visual identification of abnormal values.

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s

Digital filter setting

The time for the digital filter can be set to the sensor input. Setting the digital filter can reduce chattering of the switch output and flickering of the analogue output and the display.

The response time indicates when the set value is 90 % in relation to the step input.

(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s

FUNC output switching function

Analogue output, external input, or copy function can be selected.
(Default setting: Analogue output)

Selectable analogue output function

1 to 5 V or 0 to 10 V can be selected for the analogue voltage output type. (Default setting: 1 to 5 V)

External input function

The accumulated flow, peak value, and bottom value can be reset remotely.

Accumulated value external reset: A function to reset the accumulated flow value when an external input signal is applied.

In accumulated increment mode, the accumulated value will reset to and increase from zero.

In accumulated decrement mode, the accumulated value will reset to and decrease from the set value.

* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory will be accessed. Take into consideration that the maximum number of times the memory can be accessed is 1.5 million times. The total number of external inputs and the accumulated value memorizing time interval should not exceed 1.5 million times.

Peak/Bottom value reset: Peak and bottom value are reset.

Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analogue output type: When ON, the output will be 5 V (or 10 V when 0 to 10 V is selected) or 20 mA, and when OFF, 1 V (or 0 V when 0 to 10 V is selected) or 4 mA.

* Also, an increase or decrease of the flow will not change the on/off status of the output while the forced output function is activated.

Accumulated value hold

The accumulated value is not cleared even when the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 1.5 million times, which should be taken into consideration.

Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of shipment from the factory, it is set such that a security code is not required.

Key-lock function

Prevents operation errors such as accidentally changing setting values

Reset to the default settings


The product can be returned to its factory default settings.

Display with zero cut-off setting

When the flow is close to 0 l/min, the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 l/min due to high pressure or depending on the installation. The zero cut-off function will force the display to zero. The range to display zero can be changed.

■ Selection of display on sub screen



The display on the sub screen in measuring mode can be set.



Set value display	Accumulated value display	Peak value display
Displays the set value 	Displays the accumulated value 	Displays the peak value
Bottom value display	Line name display	OFF
Displays the bottom value 	Displays the line name (Up to 5 alphanumeric characters can be input.) 	Displays nothing

■ Analogue output free range function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed. The value can be changed between 10 % of the maximum value of the rated flow and the maximum value of the display range.

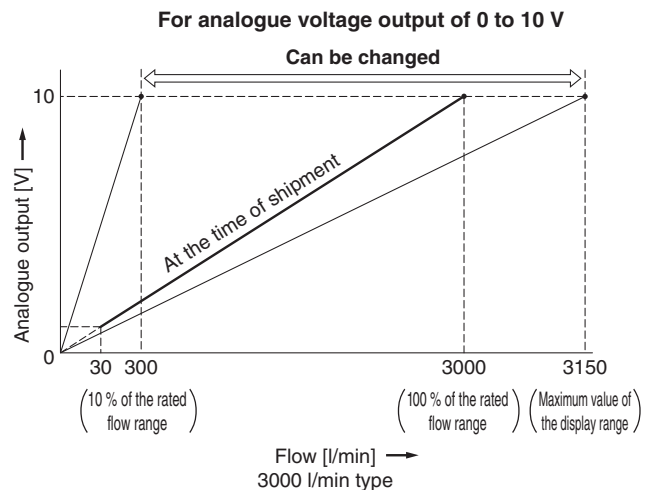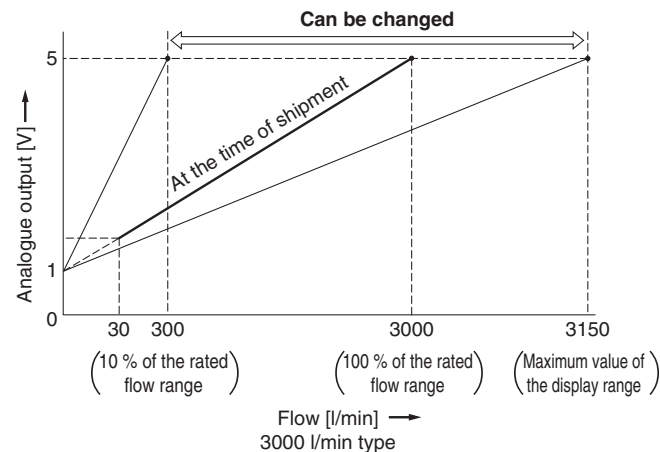

■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Error name	Description	Action
Er1 Er2	OUT over current error	A load current of 80 mA or more is applied to the switch output (OUT).	Eliminate the cause of the over current by turning off the power supply and then turning it on again.
HHH	Instantaneous flow error	The flow rate exceeds the maximum value of the display range.	Decrease the flow rate.
LLL	Reverse flow error	There is a reverse flow equivalent to -5 % or more. (Except PF3A7□H series)	Change the flow to the correct direction.
999999 flashes x 10 ⁶	Accumulated flow error	The flow rate exceeds the accumulated flow rate range.	Clear the accumulated flow rate.
Er0 Er4 Er6 Er7 Er8 Er14 Er40	System error	An internal data error has occurred.	Turn the power off and then on again.
Er13	Copy error	The copy function does not operate properly.	After clearing the error by pressing the and buttons simultaneously for a minimum of 1 second, check the wiring and the model, and then attempt to copy again.

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.


PFG300 Series

■ Copy function

The settings of the master monitor can be copied to the slave monitors, reducing setting labour and minimizing the risk of setting mistakes.

The set value can be copied to up to 10 flow monitors simultaneously.

(Maximum transmission distance: 4 m)

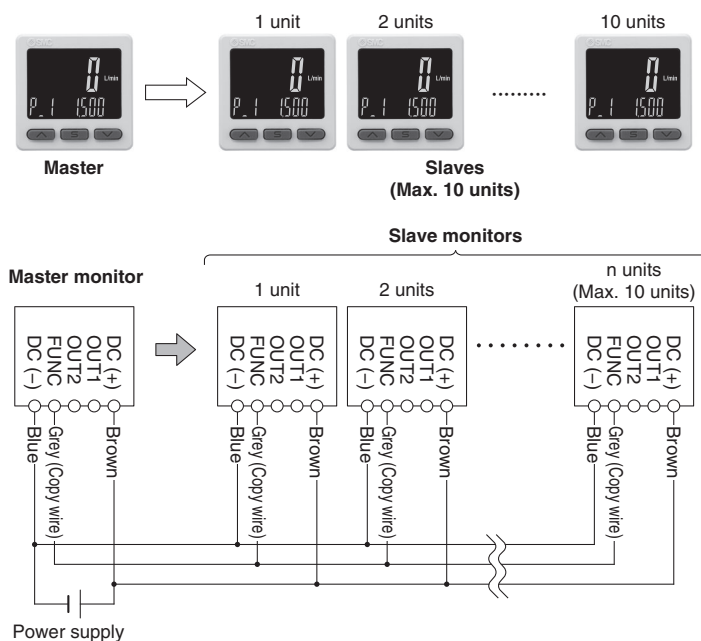

- 1) Wire as shown in the figure on the left.
- 2) Select the slave monitor which is to be the master, and change it into a master using the buttons. (In the default setting, all flow monitors are set as slaves.)
- 3) Press the **S** button on the master monitor to start copying.

■ Selection of power saving mode

The power saving mode can be selected.

With this function, if no buttons are pressed for 30 s, it shifts to power saving mode.

At the time of shipment from the factory, the product is set to the normal mode (the power saving mode is turned off).

(During power saving mode, [ECo] will flash in the sub screen and the operation light will be ON (only when the switch is ON).)

* There may be a difference in the displayed value on the connected flow switch and the flow monitor. When the flow monitor display is being used, it is recommended to set the flow switch display to OFF mode.

Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC) ¹⁾, and other safety regulations.

-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

- 1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots - Safety.
etc.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalogue.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first. ²⁾ Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.
- 2) Vacuum pads are excluded from this 1 year warranty.
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Caution

SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country.
Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

Revision History		
Edition B	- The digital flow monitor PFG300 series has been added. - Number of pages has been increased from 16 to 28.	QS
Edition C	- IO-Link compatible products (PF3A7□H-L) have been added. - The modular type has been added. - Number of pages has been increased from 28 to 40.	XU

SMC Corporation (Europe)

Austria	+43 (0)2262622800	www.smc.at	office@smc.at
Belgium	+32 (0)33551464	www.smc.be	info@smc.be
Bulgaria	+359 (0)2807670	www.smc.bg	office@smc.bg
Croatia	+385 (0)13707288	www.smc.hr	office@smc.hr
Czech Republic	+420 541424611	www.smc.cz	office@smc.cz
Denmark	+45 70252900	www.smc.dk.com	smc@smcdk.com
Estonia	+372 6510370	www.smc.pneumatics.ee	info@smcee.ee
Finland	+358 207513513	www.smc.fi	smc.fi@smc.fi
France	+33 (0)164761000	www.smc-france.fr	info@smc-france.fr
Germany	+49 (0)61034020	www.smc.de	info@smc.de
Greece	+30 210 2717265	www.smchellas.gr	sales@smchellas.gr
Hungary	+36 23513000	www.smc.hu	office@smc.hu
Ireland	+353 (0)14039000	www.smcautomation.ie	sales@smcautomation.ie
Italy	+39 03990691	www.smcitalia.it	mailbox@smcitalia.it
Latvia	+371 67817700	www.smc.lv	info@smc.lv

Lithuania	+370 5 2308118	www.smclt.lt	info@smclt.lt
Netherlands	+31 (0)205318888	www.smc.nl	info@smc.nl
Norway	+47 67129020	www.smc-norge.no	post@smc-norge.no
Poland	+48 222119600	www.smc.pl	office@smc.pl
Portugal	+351 214724500	www.smc.eu	apoioclientept@smc.smces.es
Romania	+40 213205111	www.smcromania.ro	smcromania@smcromania.ro
Russia	+7 8123036600	www.smc.eu	sales@smcru.com
Slovakia	+421 (0)413213212	www.smc.sk	office@smc.sk
Slovenia	+386 (0)73885412	www.smc.si	office@smc.si
Spain	+34 945184100	www.smc.eu	post@smc.smces.es
Sweden	+46 (0)86031200	www.smc.nu	smc@smc.nu
Switzerland	+41 (0)523963131	www.smc.ch	helpcenter@smc.ch
Turkey	+90 212 489 0 440	www.smc.pnomatik.com.tr	info@smcpnomatik.com.tr
UK	+44 (0)845 121 5122	www.smc.uk	sales@smc.uk