




Technical datasheet

N306ET2X

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, polyamide cage

Visual(s)

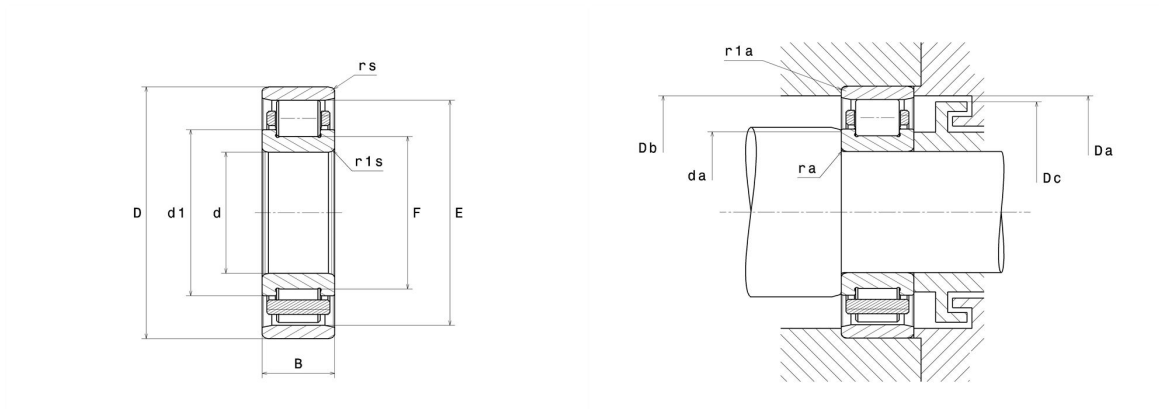

Product definition

d	30 mm
D	72 mm
B	19 mm
E	62.5 mm
F	40.5 mm
d1	44.9 mm
rs min	1.1 mm
r1s min	1.1 mm
Radial clearance class	CN
Mass (without HJ ring)	0.35 kg
Brand	NTN

Product performance

Dynamic load, C	53 kN
Static load, C0	50 kN
Fatigue limit load, Cu	6.1 kN
Nlim (oil)	11,000 rpm
Nlim (grease)	9,300 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.47 Hz
Characteristic outer ring frequency, BPF0	4.72 Hz
Characteristic inner ring frequency, BPFI	7.28 Hz

Abutment dimensions

da min	36.5 mm
Da max	65.5 mm
Db min	63 mm
Dc max	59 mm
ra max	1 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$