
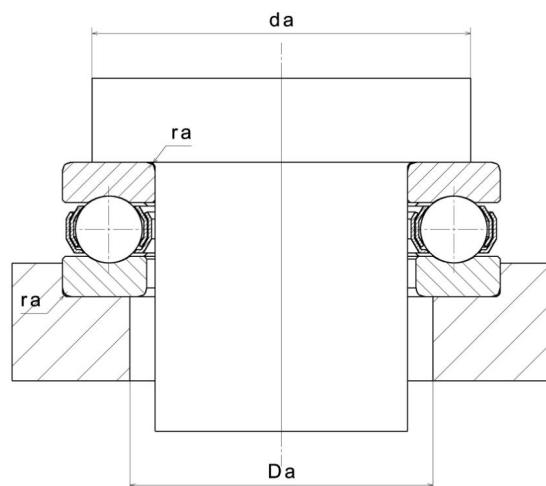


Technical data

51202

One direction thrust ball bearings

VISUAL (S)

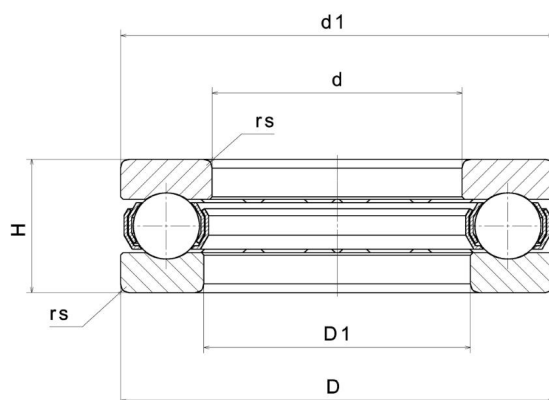

PRODUCT DEFINITION

Brand	SNR
d - Internal diameter	15 mm
D - External diameter	32 mm
D1 - Inner diameter outer ring	17 mm
d1 - External diameter inner ring	32 mm
T - Thrust bearing height	12 mm
rs - Min fillet radius	0,6 mm
Mass	0,042 kg

PRODUCT PERFORMANCE

Ca - Dynamic axial load rating	15,7 kN
C0a - Static axial load rating	24,4 kN
Tmin - Min operating temperature	-40 °C
Tmax - Max operating temperature	120 °C

BEARING FREQUENCIES

BPFO - Characteristic outer ring frequency (60 rpm)	5.5 Hz
BPFI - Characteristic inner ring frequency (60 rpm)	5.5 Hz
FTF - Characteristic cage frequency (60 rpm)	0.5 Hz
BSF - Characteristic rolling element frequency (60 rpm)	3.916 Hz

ABUTMENT

ra max - Max shaft & housing fillet radius	0,6 mm
Da max - Max shoulder diameter OR	22 mm
da min - Min shoulder diameter IR	25 mm