


Series KJ

Male connector KJH




Applicable tubing O.D. (mm)	Model	T Connection thread	H (Width across flats)	øD	L	A	M	Effective area (mm ²)	Weight (g)
2	KJH02-M3	M3 x 0.5	5.5	6	12.5	10	8.8	0.9	1.1
	KJH02-M5	M5 x 0.8	7	7.8	11.7	8.7	8.8	0.9	1.9



Hexagon socket head male connector KJS




Applicable tubing O.D. (mm)	Model	T Connection thread	H (Width across flats)	øD	L	A	M	Effective area (mm ²)	Weight (g)
2	KJS02-M3	M3 x 0.5	1.5	5.5	12.5	10	8.8	0.9	1.1



Straight union KJH




Applicable tubing O.D. (mm)	Model	øD1	L	M	Effective area (mm ²)	Weight (g)
2	KJH02-00	6	17.8	8.8	0.8	1.0



Different diameter straight: KJH



Applicable tubing O.D. (mm)		Model	øD	L	M1	M2	Effective area (mm ²)	Weight (g)
a	b							
2	3.2	KJH02-23	8.4	26.6	8.8	12.7	0.9	2.4
	4	KJH02-04	9.3	26.6	8.8	12.7	0.9	3.2

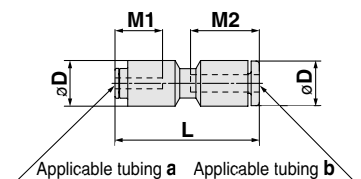

Male elbow KJL



Applicable tubing O.D. (mm)	Model	T Connection thread	H (Width across flats)	øD1	øD2	L1	L2	A	M	Effective area (mm ²)	Weight (g)
2	KJL02-M3	M3 x 0.5	5.5	6	6	9.5	11.6	12.1	8.8	0.8	1.4
	KJL02-M5	M5 x 0.8	7	6	7.8	9.5	12.1	12.1	8.8	0.8	2.4

