

773 Series

PUSH WIRE® Connectors



773 Series

Technical Data

0.75 - 2.5mm² solid
1.5 - 2.5mm² stranded
400 V/4 kV/2⁰
24 A

 12 mm

Description.	Item No.	Box Unit.
transparent housing		
 2-conductor	773-102	100
 4-conductor	773-104	100
 6-conductor	773-106	50
 8-conductor	773-108	50

773-173

Technical Data

2.5 - 6mm² solid & stranded
400 V/4 kV/2⁰
41 A

 12 - 13 mm


Description.	Item No.	Box Unit.
transparent housing		
 3-conductor	773-173	50

773 Series


Accessories

Description.	Item No.	Box Unit.
 Mounting Carrier	773-332	10


Operating



1. Strip the conductor 12mm.



2. Insert the conductor fully into the housing to complete the connection.



3. To remove, simply twist and pull the connector and conductor at the same time.


Advantages & Accessories



Test slot

Back of the housing

- Easy testing while installed

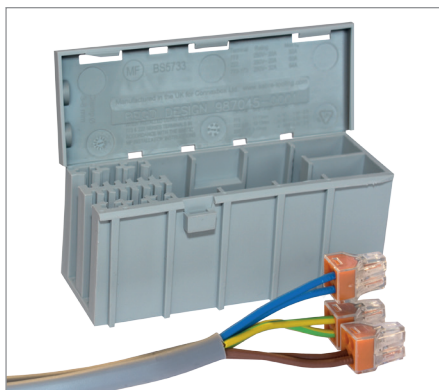

WAGOBOX

Junction box

- Suitable for the 773 and 222 Series
- Can be used within maintenance free applications



773-332 Mounting Carrier

With various mounting options

- Horizontal mounting on DIN 35 rail
- Horizontal screw mounting