


Single Shut-Off

27KATF Coupler with valve, Hose Barb


Nickel-plated brass / Steel, NBR

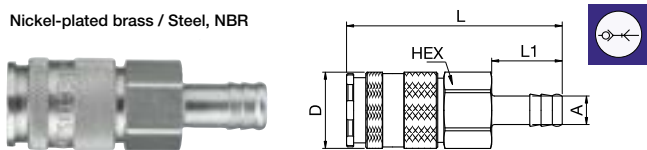

A		HEX	L	L1	D
8	27KATF08MPN	24	76	25	27
9	27KATF09MPN	24	76	25	27
10	27KATF10MPN	24	76	25	27
13	27KATF13MPN	24	76	25	27
16	27KATF16MPN	24	76	20	27
19	27KATF19MPN	24	76	25	27

27SFAK Plug without valve, Male Thread


Nickel-plated steel

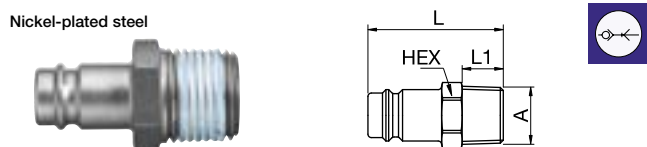

A		HEX	L	L1
R1/4	27SFAK13SXN	17	40	12
R3/8	27SFAK17SXN	17	40	12
R1/2	27SFAK21SXN	22	45	17
R3/4	27SFAK26SXN	27	48	19

27SFIW Plug without valve, Female Thread


Nickel-plated steel

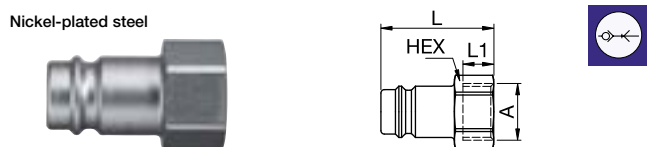


A		HEX	L	L1
G1/4	27SFIW13SXN	17	33	9
G3/8	27SFIW17SXN	19	33	9
G1/2	27SFIW21SXN	24	37	12
G3/4	27SFIW26SXN	32	42	16

27SFTF Plug without valve, Hose Barb

Nickel-plated steel

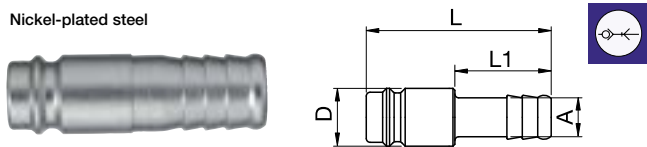


A		L	L1	D
6	27SFTF06SXN	48	25	15
8	27SFTF08SXN	48	25	15
9	27SFTF09SXN	48	25	15
10	27SFTF10SXN	48	25	15
13	27SFTF13SXN	48	25	15
16	27SFTF16SXN	49	25	18
19	27SFTF19SXN	49	25	21



Double Shut-off

27KBAK Coupler with valve, Male Thread


Nickel-plated brass, NBR

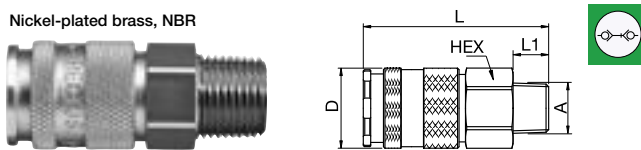

A		HEX	L	L1	D
R1/4	27KBAK13BPN	24	63	12	27
R3/8	27KBAK17BPN	24	63	12	27
R1/2	27KBAK21BPN	24	65	17	27
R3/4	27KBAK26BPN	27	65	17	27

27KBIW Coupler with valve, Female Thread


Nickel-plated brass, NBR

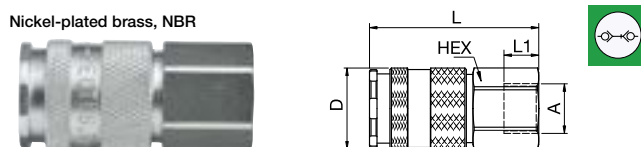

A		HEX	L	L1	D
G1/4	27KBIW13BPN	24	56	10	27
G3/8	27KBIW17BPN	24	56	11	27
G1/2	27KBIW21BPN	24	56	12	27
G3/4	27KBIW26BPN	32	60	16	27

27KBTf Coupler with valve, Hose Barb


Nickel-plated brass, NBR

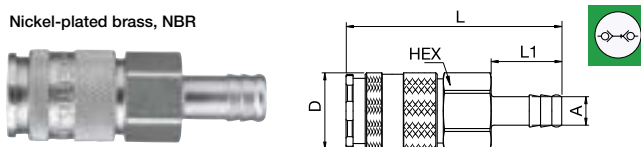

A		HEX	L	L1	D
8	27KBTf08BPN	24	76	25	27
9	27KBTf09BPN	24	76	25	27
10	27KBTf10BPN	24	76	25	27
13	27KBTf13BPN	24	76	25	27
16	27KBTf16BPN	24	76	25	27
19	27KBTf19BPN	24	76	25	27

27SBAK Plug with valve, Male Thread

Nickel-plated brass, NBR

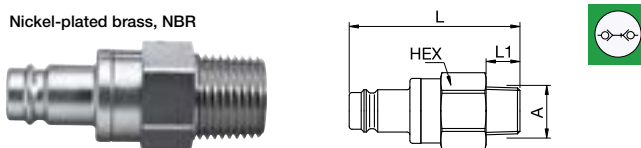

A		HEX	L	L1
R1/4	27SBAK13MPN	24	60.5	12
R3/8	27SBAK17MPN	24	60.5	12
R1/2	27SBAK21MPN	24	62.5	17
R3/4	27SBAK26MPN	27	62.5	17